

---

# **Cadence<sup>®</sup> Verilog<sup>®</sup>-A Language Reference**

**Product Version 6.1  
December 2006**

© 1996-2006 Cadence Design Systems, Inc. All rights reserved.  
Printed in the United States of America.

Cadence Design Systems, Inc., 555 River Oaks Parkway, San Jose, CA 95134, USA

**Trademarks:** Trademarks and service marks of Cadence Design Systems, Inc. (Cadence) contained in this document are attributed to Cadence with the appropriate symbol. For queries regarding Cadence's trademarks, contact the corporate legal department at the address shown above or call 800.862.4522.

Open SystemC, Open SystemC Initiative, OSCI, SystemC, and SystemC Initiative are trademarks or registered trademarks of Open SystemC Initiative, Inc. in the United States and other countries and are used with permission.

All other trademarks are the property of their respective holders.

**Restricted Print Permission:** This publication is protected by copyright and any unauthorized use of this publication may violate copyright, trademark, and other laws. Except as specified in this permission statement, this publication may not be copied, reproduced, modified, published, uploaded, posted, transmitted, or distributed in any way, without prior written permission from Cadence. This statement grants you permission to print one (1) hard copy of this publication subject to the following conditions:

1. The publication may be used solely for personal, informational, and noncommercial purposes;
2. The publication may not be modified in any way;
3. Any copy of the publication or portion thereof must include all original copyright, trademark, and other proprietary notices and this permission statement; and
4. Cadence reserves the right to revoke this authorization at any time, and any such use shall be discontinued immediately upon written notice from Cadence.

**Disclaimer:** Information in this publication is subject to change without notice and does not represent a commitment on the part of Cadence. The information contained herein is the proprietary and confidential information of Cadence or its licensors, and is supplied subject to, and may be used only by Cadence's customer in accordance with, a written agreement between Cadence and its customer. Except as may be explicitly set forth in such agreement, Cadence does not make, and expressly disclaims, any representations or warranties as to the completeness, accuracy or usefulness of the information contained in this document. Cadence does not warrant that use of such information will not infringe any third party rights, nor does Cadence assume any liability for damages or costs of any kind that may result from use of such information.

**Restricted Rights:** Use, duplication, or disclosure by the Government is subject to restrictions as set forth in FAR52.227-14 and DFAR252.227-7013 et seq. or its successor.

---

# Contents

---

<u>Preface</u> .....	19
<u>Related Documents</u> .....	19
<u>Internet Mail Address</u> .....	19
<u>Typographic and Syntax Conventions</u> .....	20
 <u>1</u>	
<u>Modeling Concepts</u> .....	23
<u>Verilog-A Language Overview</u> .....	24
<u>Describing a System</u> .....	25
<u>Analog Systems</u> .....	26
<u>Nodes</u> .....	26
<u>Conservative Systems</u> .....	27
<u>Signal-Flow Systems</u> .....	27
<u>Mixed Conservative and Signal-Flow Systems</u> .....	27
<u>Simulator Flow</u> .....	28
 <u>2</u>	
<u>Creating Modules</u> .....	31
<u>Overview</u> .....	32
<u>Declaring Modules</u> .....	32
<u>Declaring the Module Interface</u> .....	33
<u>Module Name</u> .....	34
<u>Ports</u> .....	34
<u>Parameters</u> .....	36
<u>Defining Module Analog Behavior</u> .....	37
<u>Defining Analog Behavior with Control Flow</u> .....	38
<u>Using Integration and Differentiation with Analog Signals</u> .....	40
<u>Using Internal Nodes in Modules</u> .....	41
<u>Using Internal Nodes in Behavioral Definitions</u> .....	41
<u>Using Internal Nodes in Higher Order Systems</u> .....	42

# Cadence Verilog-A Language Reference

---

<u>Instantiating Modules with Netlists</u> .....	43
--	----

## 3

<u>Lexical Conventions</u> .....	45
----------------------------------	----

<u>White Space</u> .....	46
--------------------------	----

<u>Comments</u> .....	46
-----------------------	----

<u>Identifiers</u> .....	46
--------------------------	----

<u>Ordinary Identifiers</u> .....	47
-----------------------------------	----

<u>Escaped Names</u> .....	47
----------------------------	----

<u>Scope Rules</u> .....	47
--------------------------	----

<u>Numbers</u> .....	48
----------------------	----

<u>Integer Numbers</u> .....	48
------------------------------	----

<u>Real Numbers</u> .....	48
---------------------------	----

## 4

<u>Data Types and Objects</u> .....	51
-------------------------------------	----

<u>Integer Numbers</u> .....	52
------------------------------	----

<u>Real Numbers</u> .....	52
---------------------------	----

<u>Converting Real Numbers to Integer Numbers</u> .....	53
---	----

<u>Strings</u> .....	54
----------------------	----

<u>Parameters</u> .....	54
-------------------------	----

<u>Specifying a Parameter Type</u> .....	56
--	----

<u>Specifying Permissible Values</u> .....	56
--	----

<u>Specifying Parameter Arrays</u> .....	58
--	----

<u>Local Parameters</u> .....	59
-------------------------------	----

<u>String Parameters</u> .....	59
--------------------------------	----

<u>Parameter Aliases</u> .....	59
--------------------------------	----

<u>Paramsets</u> .....	60
------------------------	----

<u>Paramset Output Variables</u> .....	61
--	----

<u>Genvars</u> .....	62
----------------------	----

<u>Natures</u> .....	63
----------------------	----

<u>Declaring a Base Nature</u> .....	64
--------------------------------------	----

<u>Disciplines</u> .....	66
--------------------------	----

<u>Binding Natures with Potential and Flow</u> .....	66
--	----

<u>Compatibility of Disciplines</u> .....	67
---	----

## Cadence Verilog-A Language Reference

---

<u>Net Disciplines</u>	70
<u>Named Branches</u>	72
<u>Implicit Branches</u>	73

### 5

## Statements for the Analog Block 75

<u>Assignment Statements</u>	75
<u>Procedural Assignment Statements in the Analog Block</u>	76
<u>Branch Contribution Statement</u>	76
<u>Indirect Branch Assignment Statement</u>	78
<u>Sequential Block Statement</u>	79
<u>Conditional Statement</u>	80
<u>Case Statement</u>	80
<u>Repeat Statement</u>	81
<u>While Statement</u>	82
<u>For Statement</u>	82
<u>Generate Statement</u>	83

### 6

## Operators for Analog Blocks 87

<u>Overview of Operators</u>	88
<u>Unary Operators</u>	89
<u>Unary Reduction Operators</u>	89
<u>Binary Operators</u>	90
<u>Bitwise Operators</u>	93
<u>Ternary Operator</u>	94
<u>Operator Precedence</u>	95
<u>Expression Short-Circuiting</u>	95
<u>String Operators and Functions</u>	95
<u>Mapping SpectreHDL String Functions to Verilog-A Functions</u>	98
<u>String Operator Details</u>	98
<u>String Function Details</u>	100

## 7

<b><u>Built-In Mathematical Functions</u></b> .....	105
<u>Standard Mathematical Functions</u> .....	106
<u>Trigonometric and Hyperbolic Functions</u> .....	106
<u>Controlling How Math Domain Errors Are Handled</u> .....	107

## 8

<b><u>Detecting and Using Analog Events</u></b> .....	109
<u>Detecting and Using Events</u> .....	110
<u>Initial step Event</u> .....	111
<u>Final step Event</u> .....	111
<u>Cross Event</u> .....	112
<u>Above Event</u> .....	113
<u>Timer Event</u> .....	115

## 9

<b><u>Simulator Functions</u></b> .....	117
<u>Announcing Discontinuity</u> .....	119
<u>Bounding the Time Step</u> .....	121
<u>Announcing and Handling Nonlinearities</u> .....	121
<u>Finding When a Signal Is Zero</u> .....	122
<u>Querying the Simulation Environment</u> .....	123
<u>Obtaining the Current Simulation Time</u> .....	123
<u>Obtaining the Current Ambient Temperature</u> .....	124
<u>Obtaining the Thermal Voltage</u> .....	124
<u>Querying the scale, gmin, and iteration Simulation Parameters</u> .....	125
<u>Detecting Parameter Overrides</u> .....	125
<u>Obtaining and Setting Signal Values</u> .....	126
<u>Accessing Attributes</u> .....	127
<u>Analysis-Dependent Functions</u> .....	128
<u>Determining the Current Analysis Type</u> .....	128
<u>Implementing Small-Signal AC Sources</u> .....	130
<u>Implementing Small-Signal Noise Sources</u> .....	130
<u>Generating Random Numbers</u> .....	132

## Cadence Verilog-A Language Reference

---

<u>Generating Random Numbers in Specified Distributions</u>	133
<u>Uniform Distribution</u>	133
<u>Normal (Gaussian) Distribution</u>	134
<u>Exponential Distribution</u>	135
<u>Poisson Distribution</u>	136
<u>Chi-Square Distribution</u>	136
<u>Student's T Distribution</u>	137
<u>Erlang Distribution</u>	138
<u>Interpolating with Table Models</u>	139
<u>Table Model File Format</u>	140
<u>Example: Using the \$table_model Function</u>	142
<u>Example: Preparing Data in One-Dimensional Array Format</u>	142
<u>Analog Operators</u>	143
<u>Restrictions on Using Analog Operators</u>	144
<u>Limited Exponential Function</u>	144
<u>Time Derivative Operator</u>	144
<u>Time Integral Operator</u>	145
<u>Circular Integrator Operator</u>	147
<u>Derivative Operator</u>	149
<u>Delay Operator</u>	150
<u>Transition Filter</u>	151
<u>Slew Filter</u>	154
<u>Implementing Laplace Transform S-Domain Filters</u>	156
<u>Implementing Z-Transform Filters</u>	161
<u>Displaying Results</u>	165
<u>\$strobe</u>	166
<u>\$display</u>	169
<u>\$write</u>	169
<u>\$debug</u>	169
<u>Specifying Power Consumption</u>	170
<u>Working with Files</u>	171
<u>Opening a File</u>	171
<u>Reading from a File</u>	174
<u>Writing to a File</u>	174
<u>Closing a File</u>	176
<u>Exiting to the Operating System</u>	176

---

<u>Entering Interactive Tcl Mode</u>	177
<u>User-Defined Functions</u>	177
<u>Declaring an Analog User-Defined Function</u>	177
<u>Calling a User-Defined Analog Function</u>	179

## 10

<u>Instantiating Modules and Primitives</u>	181
<u>Instantiating Verilog-A Modules</u>	182
<u>Creating and Naming Instances</u>	182
<u>Mapping Instance Ports to Module Ports</u>	183
<u>Connecting the Ports of Module Instances</u>	184
<u>Port Connection Rules</u>	185
<u>Overriding Parameter Values in Instances</u>	185
<u>Overriding Parameter Values from the Instantiation Statement</u>	185
<u>Overriding Parameter Values by Using Paramsets</u>	186
<u>Instantiating Analog Primitives</u>	188
<u>Instantiating Analog Primitives that Use Array Valued Parameters</u>	188
<u>Instantiating Modules that Use Unsupported Parameter Types</u>	189
<u>Using Inherited Ports</u>	189
<u>Using an m-factor (Multiplicity Factor)</u>	190
<u>Accessing an Inherited m-factor</u>	191
<u>Example: Using an m-factor</u>	191

## 11

<u>Controlling the Compiler</u>	193
<u>Using Compiler Directives</u>	194
<u>Implementing Text Macros</u>	194
<u>`define Compiler Directive</u>	194
<u>`undef Compiler Directive</u>	196
<u>Compiling Code Conditionally</u>	196
<u>Including Files at Compilation Time</u>	196
<u>Setting Default Rise and Fall Times</u>	197
<u>Resetting Directives to Default Values</u>	197
<u>Checking the Simulator Version</u>	198
<u>Checking Support for Compact Modeling Extensions</u>	198



## 12

### Using Verilog-A in the Cadence Analog Design Environment

201

<u>Creating Cellviews Using the Cadence Analog Design Environment</u>	202
<u>Preparing a Library</u>	202
<u>Creating the Symbol View</u>	204
<u>Using Blocks</u>	205
<u>Creating a Verilog-A Cellview from a Symbol or Block</u>	206
<u>Descend Edit</u>	209
<u>Creating a Verilog-A Cellview</u>	210
<u>Creating a Symbol Cellview from an Analog HDL Cellview</u>	212
<u>Using Escaped Names in the Cadence Analog Design Environment</u>	214
<u>Defining Quantities</u>	214
<u>spectre/spectreVerilog Interface (Spectre Direct)</u>	215
<u>Using Multiple Cellviews for Instances</u>	216
<u>Creating Multiple Cellviews for a Component</u>	217
<u>Modifying the Parameters Specified in Modules</u>	218
<u>Switching the Cellview Bound with an Instance</u>	221
<u>Example Illustrating Cellview Switching</u>	225
<u>Multilevel Hierarchical Designs</u>	234
<u>Including Verilog-A through Model Setup</u>	235
<u>Netlisting Verilog-A Modules</u>	235
<u>Hierarchical Verilog-A Modules</u>	235
<u>Using a Hierarchy</u>	237
<u>Using Models with Verilog-A</u>	239
<u>Models in Modules</u>	239
<u>Saving Verilog-A Variables</u>	240
<u>Displaying the Waveforms of Variables</u>	240

## 13

### Advanced Modeling Examples

<u>Electrical Modeling</u>	243
<u>Three-Phase, Half-Wave Rectifier</u>	243
<u>Thin-Film Transistor Model</u>	249

## Cadence Verilog-A Language Reference

---

<u>Mechanical Modeling</u> .....	255
<u>Car on a Bumpy Road</u> .....	256
<u>Gearbox</u> .....	263

### A

<u>Nodal Analysis</u> .....	269
<u>Kirchhoff's Laws</u> .....	270
<u>Simulating a System</u> .....	271
<u>Transient Analysis</u> .....	271
<u>Convergence</u> .....	271

### B

<u>Analog Probes and Sources</u> .....	273
<u>Overview of Probes and Sources</u> .....	274
<u>Probes</u> .....	274
<u>Port Branches</u> .....	275
<u>Sources</u> .....	275
<u>Unassigned Sources</u> .....	277
<u>Switch Branches</u> .....	277
<u>Examples of Sources and Probes</u> .....	280
<u>Linear Conductor</u> .....	280
<u>Linear Resistor</u> .....	281
<u>RLC Circuit</u> .....	281
<u>Simple Implicit Diode</u> .....	281

### C

<u>Standard Definitions</u> .....	283
<u>disciplines.vams File</u> .....	284
<u>constants.vams File</u> .....	288

### D

<u>Sample Model Library</u> .....	291
<u>Analog Components</u> .....	293

## Cadence Verilog-A Language Reference

---

<u>Analog Multiplexer</u>	293
<u>Current Deadband Amplifier</u>	294
<u>Hard Current Clamp</u>	295
<u>Hard Voltage Clamp</u>	296
<u>Open Circuit Fault</u>	297
<u>Operational Amplifier</u>	298
<u>Constant Power Sink</u>	299
<u>Short Circuit Fault</u>	300
<u>Soft Current Clamp</u>	301
<u>Soft Voltage Clamp</u>	302
<u>Self-Tuning Resistor</u>	303
<u>Untrimmed Capacitor</u>	305
<u>Untrimmed Inductor</u>	306
<u>Untrimmed Resistor</u>	307
<u>Voltage Deadband Amplifier</u>	308
<u>Voltage-Controlled Variable-Gain Amplifier</u>	309
<u>Basic Components</u>	310
<u>Resistor</u>	310
<u>Capacitor</u>	311
<u>Inductor</u>	312
<u>Voltage-Controlled Voltage Source</u>	313
<u>Current-Controlled Voltage Source</u>	314
<u>Voltage-Controlled Current Source</u>	315
<u>Current-Controlled Current Source</u>	316
<u>Switch</u>	317
<u>Control Components</u>	318
<u>Error Calculation Block</u>	318
<u>Lag Compensator</u>	319
<u>Lead Compensator</u>	320
<u>Lead-Lag Compensator</u>	321
<u>Proportional Controller</u>	322
<u>Proportional Derivative Controller</u>	323
<u>Proportional Integral Controller</u>	324
<u>Proportional Integral Derivative Controller</u>	325
<u>Logic Components</u>	326
<u>AND Gate</u>	326

## Cadence Verilog-A Language Reference

---

<u>NAND Gate</u>	327
<u>OR Gate</u>	328
<u>NOT Gate</u>	329
<u>NOR Gate</u>	330
<u>XOR Gate</u>	331
<u>XNOR Gate</u>	332
<u>D-Type Flip-Flop</u>	333
<u>Clocked JK Flip-Flop</u>	334
<u>JK-Type Flip-Flop</u>	336
<u>Level Shifter</u>	337
<u>RS-Type Flip-Flop</u>	338
<u>Trigger-Type (Toggle-Type) Flip-Flop</u>	339
<u>Half Adder</u>	340
<u>Full Adder</u>	341
<u>Half Subtractor</u>	342
<u>Full Subtractor</u>	343
<u>Parallel Register, 8-Bit</u>	344
<u>Serial Register, 8-Bit</u>	345
<u>Electromagnetic Components</u>	346
<u>DC Motor</u>	346
<u>Electromagnetic Relay</u>	347
<u>Three-Phase Motor</u>	348
<u>Functional Blocks</u>	349
<u>Amplifier</u>	349
<u>Comparator</u>	350
<u>Controlled Integrator</u>	351
<u>Deadband</u>	352
<u>Deadband Differential Amplifier</u>	353
<u>Differential Amplifier (Opamp)</u>	354
<u>Differential Signal Driver</u>	355
<u>Differentiator</u>	356
<u>Flow-to-Value Converter</u>	357
<u>Rectangular Hysteresis</u>	358
<u>Integrator</u>	359
<u>Level Shifter</u>	360
<u>Limiting Differential Amplifier</u>	361

## Cadence Verilog-A Language Reference

---

<u>Logarithmic Amplifier</u>	362
<u>Multiplexer</u>	363
<u>Quantizer</u>	364
<u>Repeater</u>	365
<u>Saturating Integrator</u>	366
<u>Swept Sinusoidal Source</u>	367
<u>Three-Phase Source</u>	368
<u>Value-to-Flow Converter</u>	369
<u>Variable Frequency Sinusoidal Source</u>	370
<u>Variable-Gain Differential Amplifier</u>	371
<u>Magnetic Components</u>	372
<u>Magnetic Core</u>	372
<u>Magnetic Gap</u>	373
<u>Magnetic Winding</u>	374
<u>Two-Phase Transformer</u>	375
<u>Mathematical Components</u>	376
<u>Absolute Value</u>	376
<u>Adder</u>	377
<u>Adder, 4 Numbers</u>	378
<u>Cube</u>	379
<u>Cubic Root</u>	380
<u>Divider</u>	381
<u>Exponential Function</u>	382
<u>Multiplier</u>	383
<u>Natural Log Function</u>	384
<u>Polynomial</u>	385
<u>Power Function</u>	386
<u>Reciprocal</u>	387
<u>Signed Number</u>	388
<u>Square</u>	389
<u>Square Root</u>	390
<u>Subtractor</u>	391
<u>Subtractor, 4 Numbers</u>	392
<u>Measure Components</u>	393
<u>ADC, 8-Bit Differential Nonlinearity Measurement</u>	393
<u>ADC, 8-Bit Integral Nonlinearity Measurement</u>	394

## Cadence Verilog-A Language Reference

---

<u>Ammeter (Current Meter)</u>	395
<u>DAC, 8-Bit Differential Nonlinearity Measurement</u>	396
<u>DAC, 8-Bit Integral Nonlinearity Measurement</u>	397
<u>Delta Probe</u>	398
<u>Find Event Probe</u>	399
<u>Find Slope</u>	401
<u>Frequency Meter</u>	402
<u>Offset Measurement</u>	403
<u>Power Meter</u>	404
<u>Q (Charge) Meter</u>	406
<u>Sampler</u>	407
<u>Slew Rate Measurement</u>	408
<u>Signal Statistics Probe</u>	409
<u>Voltage Meter</u>	411
<u>Z (Impedance) Meter</u>	412
<u>Mechanical Systems</u>	413
<u>Gearbox</u>	413
<u>Mechanical Damper</u>	414
<u>Mechanical Mass</u>	415
<u>Mechanical Restrainer</u>	416
<u>Road</u>	417
<u>Mechanical Spring</u>	418
<u>Wheel</u>	419
<u>Mixed-Signal Components</u>	420
<u>Analog-to-Digital Converter, 8-Bit</u>	420
<u>Analog-to-Digital Converter, 8-Bit (Ideal)</u>	421
<u>Decimator</u>	422
<u>Digital-to-Analog Converter, 8-Bit</u>	423
<u>Digital-to-Analog Converter, 8-Bit (Ideal)</u>	424
<u>Sigma-Delta Converter (first-order)</u>	425
<u>Sample-and-Hold Amplifier (Ideal)</u>	426
<u>Single Shot</u>	427
<u>Switched Capacitor Integrator</u>	428
<u>Power Electronics Components</u>	429
<u>Full Wave Rectifier, Two Phase</u>	429
<u>Half Wave Rectifier, Two Phase</u>	430

## Cadence Verilog-A Language Reference

---

<u>Thyristor</u>	431
<u>Semiconductor Components</u>	432
<u>Diode</u>	432
<u>MOS Transistor (Level 1)</u>	433
<u>MOS Thin-Film Transistor</u>	435
<u>N JFET Transistor</u>	436
<u>NPN Bipolar Junction Transistor</u>	437
<u>Schottky Diode</u>	439
<u>Telecommunications Components</u>	440
<u>AM Demodulator</u>	440
<u>AM Modulator</u>	441
<u>Attenuator</u>	442
<u>Audio Source</u>	443
<u>Bit Error Rate Calculator</u>	444
<u>Charge Pump</u>	445
<u>Code Generator, 2-Bit</u>	446
<u>Code Generator, 4-Bit</u>	447
<u>Decider</u>	448
<u>Digital Phase Locked Loop (PLL)</u>	449
<u>Digital Voltage-Controlled Oscillator</u>	450
<u>FM Demodulator</u>	451
<u>FM Modulator</u>	452
<u>Frequency-Phase Detector</u>	453
<u>Mixer</u>	454
<u>Noise Source</u>	455
<u>PCM Demodulator, 8-Bit</u>	456
<u>PCM Modulator, 8-Bit</u>	457
<u>Phase Detector</u>	458
<u>Phase Locked Loop</u>	459
<u>PM Demodulator</u>	460
<u>PM Modulator</u>	461
<u>QAM 16-ary Demodulator</u>	462
<u>Quadrature Amplitude 16-ary Modulator</u>	464
<u>QPSK Demodulator</u>	465
<u>QPSK Modulator</u>	466
<u>Random Bit Stream Generator</u>	467

## Cadence Verilog-A Language Reference

---

<u>Transmission Channel</u> .....	468
<u>Voltage-Controlled Oscillator</u> .....	469

### E

<u>Verilog-A Keywords</u> .....	471
<u>Keywords to Support Backward Compatibility</u> .....	473

### F

<u>Understanding Error Messages</u> .....	475
---	-----

### G

<u>Getting Ready to Simulate</u> .....	477
<u>Creating a Verilog-A Module Description</u> .....	478
<u>File Extension .va</u> .....	478
<u>include Compiler Directive</u> .....	478
<u>Creating a Spectre Netlist File</u> .....	480
<u>Including Files in a Netlist</u> .....	481
<u>Naming Requirements for SPICE-Mode Netlisting</u> .....	483
<u>Modifying Absolute Tolerances</u> .....	483
<u>Modifying abstol in Standalone Mode</u> .....	484
<u>Modifying abstol in the Cadence Analog Design Environment</u> .....	485
<u>Using the Compiled C Code Flow</u> .....	487
<u>Turning the Compiled C Code Flow Off and On</u> .....	487
<u>Creating and Specifying Compiled C Code Databases</u> .....	488
<u>Reusing and Sharing Compiled C Objects</u> .....	488

### H

<u>Supported and Unsupported Language Elements</u> .....	491
--	-----

### I

<u>Updating Verilog-A Modules</u> .....	495
<u>Suggestions for Updating Models</u> .....	496



## Cadence Verilog-A Language Reference

---

<u>Current Probes</u>	496
<u>Analog Functions</u>	497
<u>NULL Statements</u>	497
<u>inf Used as a Number</u>	498
<u>Changing Delay to Absdelay</u>	498
<u>Changing \$realtime to \$abstime</u>	498
<u>Changing bound_step to \$bound_step</u>	498
<u>Changing Array Specifications</u>	499
<u>Chained Assignments Made Illegal</u>	499
<u>Real Argument Not Supported as Direction Argument</u>	499
<u>\$limexp Changed to limexp</u>	499
<u>`if `MACRO is Not Allowed</u>	500
<u>\$warning is Not Allowed</u>	500
<u>discontinuity Changed to \$discontinuity</u>	500

## J

<u>Creating ViewInfo for Verilog-A Cellview</u>	501
<u>ahdlUpdateViewInfo</u>	501
<u>Description</u>	501
<u>Arguments</u>	501
<u>Example 1</u>	501
<u>Example 2</u>	502
<u>Example 3</u>	502

<u>Glossary</u>	503
-----------------	-----

<u>Index</u>	509
--------------	-----



# Preface

---

This manual describes the Cadence® Verilog®-A language, the analog subset of the Verilog-AMS language. With Verilog-A, you can create and use modules that describe the high-level behavior of components and systems. The guidance given here is designed for users who are familiar with the development, design, and simulation of circuits and with high-level programming languages, such as C.

The preface discusses the following:

- [Related Documents](#) on page 19
- [Internet Mail Address](#) on page 19
- [Typographic and Syntax Conventions](#) on page 20

## Related Documents

For more information about Verilog-A and related products, consult the sources listed below.

- *Cadence Analog Design Environment User Guide*
- *Component Description Format User Guide*
- *Virtuoso Schematic Editor User Guide*
- *Verilog-A Debugging Tool User Guide*
- *Cadence Hierarchy Editor User Guide*
- *Instance-Based View Switching Application Note*
- [\*Virtuoso Spectre Circuit Simulator Reference\*](#)
- [\*Virtuoso Spectre Circuit Simulator User Guide\*](#)

## Internet Mail Address

You can send product enhancement requests and report obscure problems to Customer Support. For current phone numbers and e-mail addresses, see

# Cadence Verilog-A Language Reference

## Preface

---

<http://sourcelink.cadence.com/supportcontacts.html>

For help with obscure problems, please include the following in your e-mail:

- The license server host ID

To determine what your server's host ID is, use the SourceLink® Subscription Service <http://Sourcelink.cadence.com/hostid/> for assistance.

- A description of the problem
- The version of the product that you are using
- A netlist and all included files including Verilog-A modules so that Customer Support can reproduce the problem
- Output logs and error messages

## Typographic and Syntax Conventions

Special typographical conventions are used to emphasize or distinguish certain kinds of text in this document. The formal syntax used in this reference uses the definition operator, `:=`, to define the more complex elements of the Verilog-A language in terms of less complex elements.

- Lowercase words represent syntactic categories. For example,

`module_declaration`

Some names begin with a part that indicates how the name is used. For example,

`node_identifier`

represents an identifier that is used to declare or reference a node.

- Boldface words represent elements of the syntax that must be used exactly as presented. Such items include keywords, operators, and punctuation marks. For example,

`endmodule`

- Vertical bars indicate alternatives. You can choose to use any one of the items separated by the bars. For example,

```
attribute ::=
    abstol
    | access
    | ddt_nature
    | idt_nature
    | units
```

# Cadence Verilog-A Language Reference

## Preface

---

```
huge
blowup
identifier
```

- Square brackets enclose optional items. For example,

```
input declaration ::=
    input [ range ] list_of_port_identifiers ;
```

- Braces enclose an item that can be repeated zero or more times. For example,

```
list_of_ports ::=
    ( port { , port } )
```

Code examples are displayed in Courier font.

```
/* This is an example of Courier font.*/
```

Within the text, the variables are in Courier italic. *This is an example of the Courier italic font.*

Within the text, the keywords, filenames, names of natures, and names of disciplines are set in Courier font, like this: keyword, file\_name, name\_of\_nature, name\_of\_discipline.

If a statement is too long to fit on one line, the remainder of the statement is indented on the next line, like this:

```
qgf = width*length*cfbb*(vgfs - wkf - qb/(2*cbb) -
    (vgbs - vfbb + qb/(2*cob))) + qgf_par ;
```

To distinguish Verilog-A module descriptions from netlists, the netlists are enclosed in boxes and include a comment line at the beginning identifying them as netlists. Here is a sample netlist:

```
// sample circuit netlist
simulator lang=spectre
global gnd
ahdl_include "description.va"
vin1 in gnd vsource type=sine freq=1e3 ampl=1
        hdlmodule in gnd out opamp gain=2e5
tranAnal tran stop=10e-4
```

# **Cadence Verilog-A Language Reference**

## **Preface**

---

---

# Modeling Concepts

---

This chapter introduces some important concepts basic to using the Cadence® Verilog®-A language, including

- [Verilog-A Language Overview](#) on page 24
- [Describing a System](#) on page 25
- [Analog Systems](#) on page 26


## Verilog-A Language Overview

The Verilog-A language is a high-level language that uses modules to describe the structure and behavior of analog systems and their components. With the analog statements of Verilog-A, you can describe a wide range of conservative systems and signal-flow systems, such as electrical, mechanical, fluid dynamic, and thermodynamic systems.

To describe a system, you must specify both the structure of the system and the behavior of its components. In Verilog-A with the Spectre<sup>®</sup> Circuit simulator, you define structure at different levels. At the highest level, you define overall system structure in a netlist. At lower, more specific levels, you define the internal structure of modules by defining the interconnections among submodules.

To specify the behavior of individual modules, you define mathematical relationships among their input and output signals.

After you define the structure and behavior of a system, the simulator derives a descriptive set of equations from the netlist and modules. The simulator then solves the set of equations to obtain the system response.

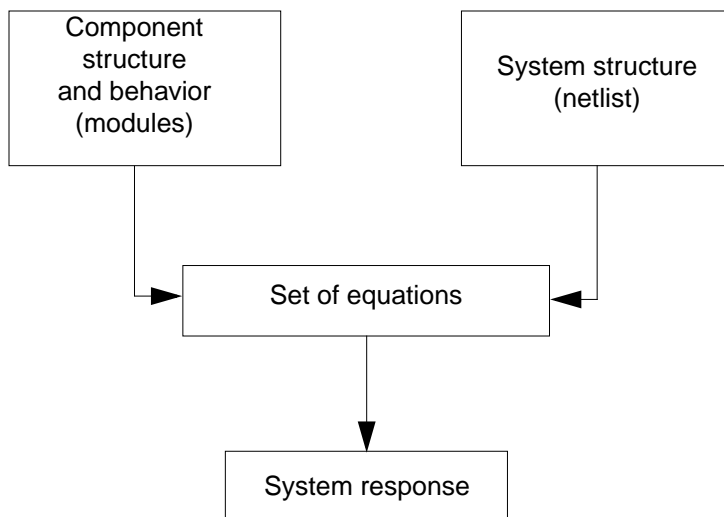

The simulator uses Kirchhoff's Potential and Flow laws to develop a set of descriptive equations and then solves the equations with the Newton-Raphson method. See [Appendix A, "Nodal Analysis,"](#) for additional information.

To introduce the algorithms underlying system simulation, the following sections describe

- What a system is
- How you specify the structure and behavior of a system



- How the simulator develops a set of equations and solves them to simulate a system

## Describing a System


A *system* is a collection of interconnected components that produces a response when acted upon by a stimulus. A *hierarchical system* is a system in which the components are also systems. A *leaf component* is a component that has no subcomponents. Each leaf component connects to zero or more nets. Each net connects to a signal which can traverse multiple levels of the hierarchy. The behavior of each component is defined in terms of the values of the nets to which it connects.

A *signal* is a hierarchical collection of nets which, because of port connections, are contiguous. If all the nets that make up a signal are in the discrete domain, the signal is a *digital signal*. If all the nets that make up a signal are in the continuous domain, the signal is an *analog signal*. A signal that consists of nets from both domains is called a *mixed signal*.

Similarly, a port whose connections are both analog is an *analog port*, a port whose connections are both digital is a *digital port*, and a port with one analog connection and one

digital connection is a *mixed port*. The components interconnect through ports and nets to build a hierarchy, as illustrated in the following figure.

### System Terminology

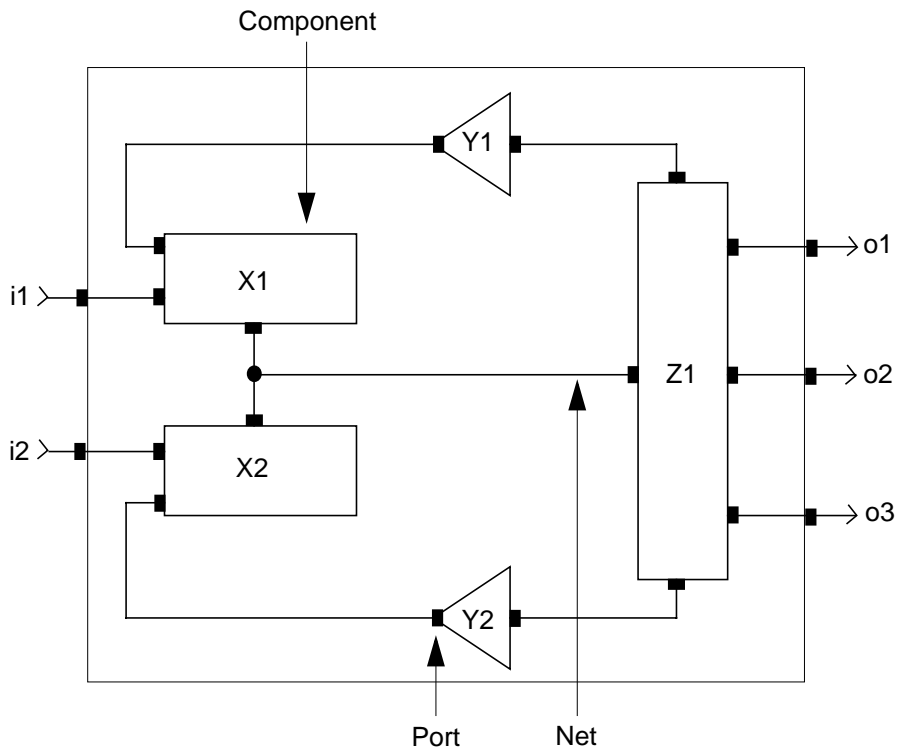

## Analog Systems

The information in the following sections applies to analog systems such as the systems you can simulate with Verilog-A.

### Nodes

A node is a point of physical connection between nets of continuous-time descriptions. Nodes obey conservation-law semantics.

## Conservative Systems

A *conservative system* is one that obeys the laws of conservation described by Kirchhoff's Potential and Flow laws. For additional information about these laws, see ["Kirchhoff's Laws"](#) on page 270.


In a conservative system, each node has two values associated with it: the potential of the node and the flow out of the node. Each branch in a conservative system also has two associated values: the potential across the branch and the flow through the branch.

### Reference Nodes

The potential of a single node is defined with respect to a reference node. The reference node, called *ground* in electrical systems, has a potential of zero.

### Reference Directions

Each branch has a reference direction for the potential and flow. For example, consider the following schematic. With the reference direction shown, the potential in this schematic is positive whenever the potential of the terminal marked with a plus sign is larger than the potential of the terminal marked with a minus sign.



Verilog-A uses associated reference directions. Consequently, a positive flow is defined as one that enters the branch through the terminal marked with the plus sign and exits through the terminal marked with the minus sign.

## Signal-Flow Systems

Unlike conservative systems, signal-flow systems associate only a single value with each node. Verilog-A supports signal-flow modeling.

## Mixed Conservative and Signal-Flow Systems


With Verilog-A, you can model systems that contain a mixture of conservative nodes and signal-flow nodes. Verilog-A accommodates this mixing with semantics that can be used for both kinds of nodes.

## **Simulator Flow**

After you specify the structure and behavior of a system, you submit the description to the simulator. The simulator then uses Kirchhoff's laws to develop equations that define the values and flows in the system. Because the equations are differential and nonlinear, the simulator does not solve them directly. Instead, the simulator uses an approximation and solves the equations iteratively at individual time points. The simulator controls the interval between the time points to ensure the accuracy of the approximation.

At each time point, iteration continues until two convergence criteria are satisfied. The first criterion requires that the approximate solution on this iteration be close to the accepted solution on the previous iteration. The second criterion requires that Kirchhoff's Flow Law be adequately satisfied. To indicate the required accuracy for these criteria, you specify tolerances. For a graphical representation of the analog iteration process, see the [Simulator Flow](#) figure on page 29. For more details about how the simulator uses Kirchhoff's laws, see ["Simulating a System"](#) on page 271.

## Simulator Flow

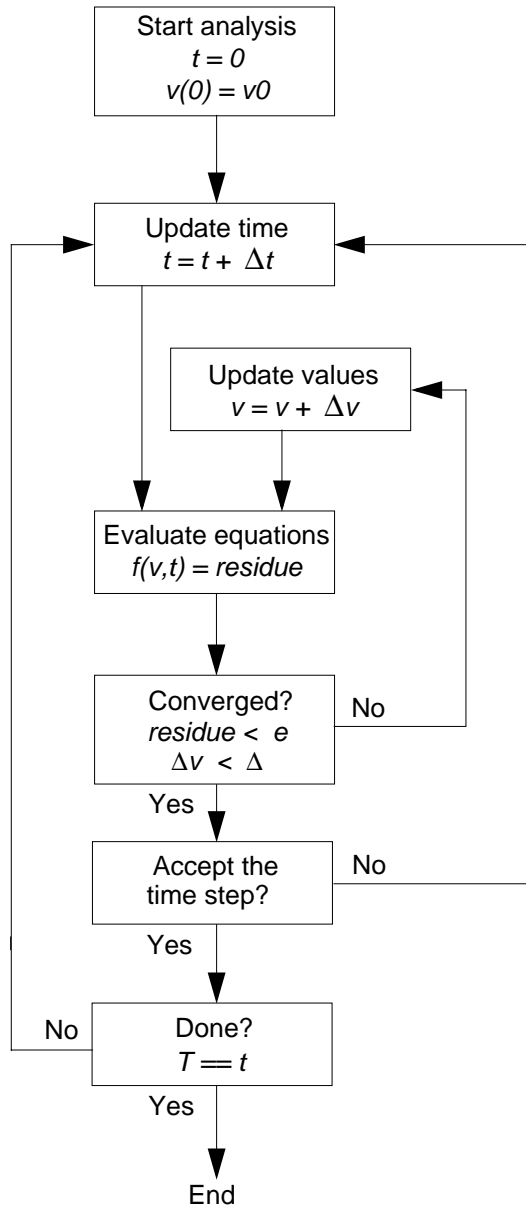

## **Cadence Verilog-A Language Reference**

### **Modeling Concepts**

---

---

## Creating Modules

---

This chapter describes how to use modules. The tasks involved in using modules are basic to modeling in Cadence® Verilog®-A.

- [Declaring Modules](#) on page 32
- [Declaring the Module Interface](#) on page 33
- [Defining Module Analog Behavior](#) on page 37
- [Using Internal Nodes in Modules](#) on page 41

## Overview

This chapter introduces the concept of modules. Additional information about modules is located in [Chapter 10, “Instantiating Modules and Primitives,”](#) including detailed discussions about declaring and connecting ports and about instantiating modules.

The following definition for a digital to analog converter illustrates the form of a module definition. The entire module is enclosed between the keywords `module` and `endmodule` or `macromodule` and `endmodule`.

Interface declarations	—	<pre> module res1(p, n);   inout p, n;   electrical p, n;   parameter real r=1 from (0:inf);   parameter real tc=1.5m from [0:3m); </pre>
Behavioral description	—	<pre>     real reff;     analog begin         @(initial_step) begin             reff = r*(1+tc*\$temperature);         end         I(p, n) &lt;+ V(p, n)/reff ;     end endmodule </pre>

## Declaring Modules

To declare a module, use this syntax.

```

module_declaration ::=
    module_keyword module_identifier [ ( list_of_ports ) ] ;
    [ module_items ]
    endmodule

```

```

module_keyword ::=
    module
    |   macromodule

```

```

module_items ::=
    { module_item }
    |   analog_block

```

```

module_item ::=
    module_item_declaration
    |   module_instantiation

```

```

module_item_declaration ::=
    parameter_declaration
    |   aliasparam_declaration
    |   input_declaration
    |   output_declaration
    |   inout_declaration

```



## Cadence Verilog-A Language Reference

### Creating Modules

---

```
ground_declaration  
integer_declaration  
net_discipline_declaration  
real_declaration
```

<i>module_identifier</i>	The name of the module being declared.
<i>list_of_ports</i>	An ordered list of the module's ports. For details, see <a href="#">“Ports”</a> on page 34.
<i>module_items</i>	The different types of declarations and definitions. Note that you can have no more than one analog block in each module.

---

For information about	Read
Analog blocks	<a href="#">“Defining Module Analog Behavior”</a> on page 37
Parameter overrides	<a href="#">“Overriding Parameter Values in Instances”</a> on page 185
Module instantiation	<a href="#">“Instantiating Verilog-A Modules”</a> on page 182
Parameter declarations	<a href="#">“Parameters”</a> on page 54
Input, output, and inout declarations	<a href="#">“Port Direction”</a> on page 35
Integer declarations	<a href="#">“Integer Numbers”</a> on page 52
Net discipline declarations	<a href="#">“Net Disciplines”</a> on page 70
Real declarations	<a href="#">“Real Numbers”</a> on page 52
Genvar declarations	<a href="#">“Genvars”</a> on page 62
Analog function declarations	<a href="#">“User-Defined Functions”</a> on page 177

---

## Declaring the Module Interface

Use the module interface declarations to define

- Name of the module
- Ports of the module
- Parameters of the module

For example, the module interface declaration

```
module res(p, n) ;  
  inout p, n ;  
  electrical p, n ;  
  parameter real r = 0 ;
```

declares a module named `res`, ports named `p` and `n`, and a parameter named `r`.

## Module Name

To define the name for a module, put an identifier after the keyword `module` or `macromodule`. Ensure that the new module name is unique among other module, schematic, subcircuit, and model names, and any built-in Spectre<sup>®</sup> circuit simulator primitives. If your module has any ports, list them in parentheses following the identifier.

## Ports

To declare the ports used in a module, use port declarations. To specify the type and direction of a port, use the related declarations described in this section.

```
list_of_ports ::=  
    port { , port }  
  
port ::=  
    port_expression  
  
port_expression ::=  
    port_identifier  
    | port_identifier [ constant_expression ]  
    | port_identifier [ constant_range ]  
  
constant_range ::=  
    msb_constant_expression : lsb_constant_expression
```

For example, these code fragments illustrate possible port declarations.

```
module exam1 ;                // Defines no ports  
module exam2 (p, n) ;         // Defines 2 simple ports
```

Normally, you cannot use `Q` as the name of a port. However, if you need to use `Q` as a port name, you can use the special text macro identifier, `VAMS_ELEC_DIS_ONLY`, as follows.

```
`define VAMS_ELEC_DIS_ONLY  
`include "disciplines.vams"  
  
(module 1, which uses a port called Q)  
(module 2, which use a port called Q)  
...  
`include "disciplines.vams"  
  
(module 3, which uses an access function called Q)  
(module 4, which uses an access function called Q)  
...
```

This macro undefines the sections in the `disciplines.vams` file that use `Q`, making it available for you to use as a port name. Consequently, when you need to use `Q` as an access function again, you need to include the `disciplines.vams` file again.

## Port Type

To declare the type of a port, use a net discipline declaration in the body of the module. If you do not declare the type of a port, you can use the port only in a structural description. In other words, you can pass the port to module instances, but you cannot access the port in a behavioral description. Net discipline declarations are described in “[Net Disciplines](#)” on page 70.

Ports declared as vectors must use identical ranges for the port type and port direction declarations.

## Port Direction

You must declare the port direction for every port in the list of ports section of the module declaration. To declare the direction of a port, use one of the following three syntaxes.

```
input_declaration ::=
    input [ range ] list_of_port_identifiers ;

output_declaration ::=
    output [ range ] list_of_port_identifiers ;

inout_declaration ::=
    inout [ range ] list_of_port_identifiers ;

range ::=
    [ constant_expression : constant_expression ]
```

<code>input</code>	Declares that the signals on the port cannot be set, although they can be used in expressions.
<code>output</code>	Declares that the signals on the port can be set, but they cannot be used in expressions.
<code>inout</code>	Declares that the port is bidirectional. The signals on the port can be both set and used in expressions. <code>inout</code> is the default port direction.

Ports declared as vectors must use identical ranges for the port type and port direction declarations.

In this release of Verilog-A,

- The compiler does not enforce correct application of `input`, `output`, and `inout`.
- You cannot use parameters to define *constant\_expression*.

### Port Declaration Example

Module `gainer`, described below, has two ports: `out` and `pin`. The `out` port is declared with a port direction of `output`, so that its values can be set. The `pin` port is declared with a port direction of `input`, so that its value can be read. Both ports are declared to be of the `voltage` discipline.

```
module gainer (out, pin) ;           // Declares two ports
output out ;                       // Declares port as output
input pin ;                        // Declares port as input
voltage out, pin ;                 // Declares type of ports
parameter real gain = 2.0 ;
analog
    V(out) <+ gain * V(pin) ;
endmodule
```


### Parameters

With `parameter` (and `dynamicparam`) declarations, you specify parameters that can be changed when a module is used as an instance in a design. Using parameters lets you customize each instance.

## Cadence Verilog-A Language Reference

### Creating Modules

For each parameter, you must specify a default value. You can also specify an optional type and an optional valid range. The following example illustrates how to declare parameters and variables in a module.

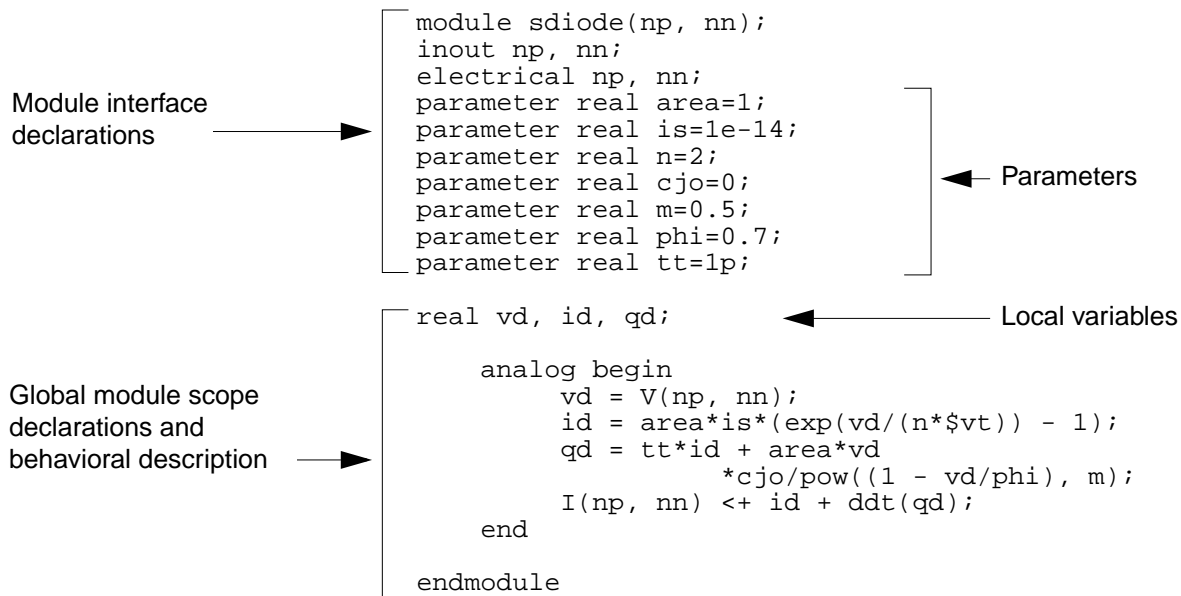

Module `sdiode` has a parameter, `area`, that defaults to 1. If `area` is not specified for an instance, it receives a value of 1. Similarly, the other parameters, `is`, `n`, `cjo`, `m`, `phi`, and `tt`, have specified default values too.

Module `sdiode` also defines three local variables: `vd`, `id`, and `qd`.

For more information about parameter declarations, see [“Parameters”](#) on page 54.

## Defining Module Analog Behavior

To define the behavioral characteristics of a module, you create an analog block. The simulator evaluates all the analog blocks in the various modules of a design as though the blocks are executing concurrently.

```
analog_block ::=
    analog analog_statement

analog_statement ::=
    analog_seq_block
    analog_branch_contribution
    analog_indirect_branch_assignment
    analog_procedural_assignment
    analog_conditional_statement
    analog_for_statement
    analog_case_statement
```

```
    analog_event_controlled_statement  
    system_task_enable
```

`analog_statement` can appear only within the analog block.

`analog_seq_block` are discussed in [“Sequential Block Statement”](#) on page 79.

In the analog block, you can code contribution statements that define relationships among analog signals in the module. For example, consider the following contribution statements:

```
V(n1, n2) <+ expression;  
I(n1, n2) <+ expression;
```

where `V(n1, n2)` and `I(n1, n2)` represent potential and flow sources, respectively. You can define `expression` to be any combination of linear, nonlinear, algebraic, or differential expressions involving module signals, constants, and parameters.

The modules you write can contain at most a single analog block. When you use an analog block, you must place it after the interface declarations and local declarations.

The following module, which produces the sum and product of its inputs, illustrates the form of the analog block. Here the block contains two contribution statements.

```
module am(in1, in2, outsum, outmult) ;  
input in1, in2 ;  
output outsum, outmult ;  
voltage in1, in2, outsum, outmult ;  
    analog begin  
        V(outsum) <+ V(in1) + V(in2) ;  
        V(outmult) <+ V(in1) * V(in2) ;  
    end  
endmodule
```

Module `setvolts` illustrates an analog block containing a single statement.

```
module setvolts (outvolt) ;  
output outvolt ;  
voltage outvolt ;  
    analog  
        V(outvolt) <+ 5.0 ;  
endmodule
```

## Defining Analog Behavior with Control Flow

You can also incorporate conditional control flow into a module. With control flow, you can define the behavior of a module in regions.


The following module, for example, describes a voltage deadband amplifier `vdba`. If the input voltage is greater than `vin_high` or less than `vin_low`, the amplifier is active. When the

## Cadence Verilog-A Language Reference

### Creating Modules

---


amplifier is active, the output is `gain` times the differential voltage between the input voltage and the edge of the deadband. When the input is in the deadband between `vin_low` and `vin_high`, the amplifier is quiescent and the output voltage is zero.

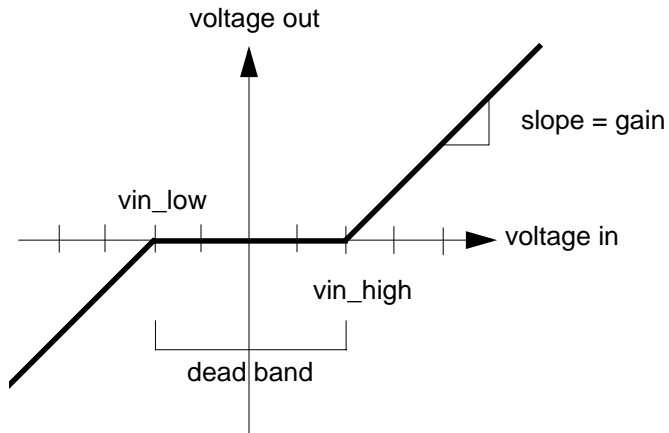

```
module vdba(in, out);
input in ;
output out ;
electrical in, out ;
parameter real vin_low = -2.0 ;
parameter real vin_high = 2.0 ;
parameter real gain = 1 from (0:inf) ;

    analog begin
        if (V(in) >= vin_high) begin
            V(out) <+ gain*(V(in) - vin_high) ;
        end else if (V(in) <= vin_low) begin
            V(out) <+ gain*(V(in) - vin_low) ;
        end else begin
            V(out) <+ 0 ;
        end
    end
end
endmodule
```

The following graph shows the response of the `vdba` module to a sinusoidal source.

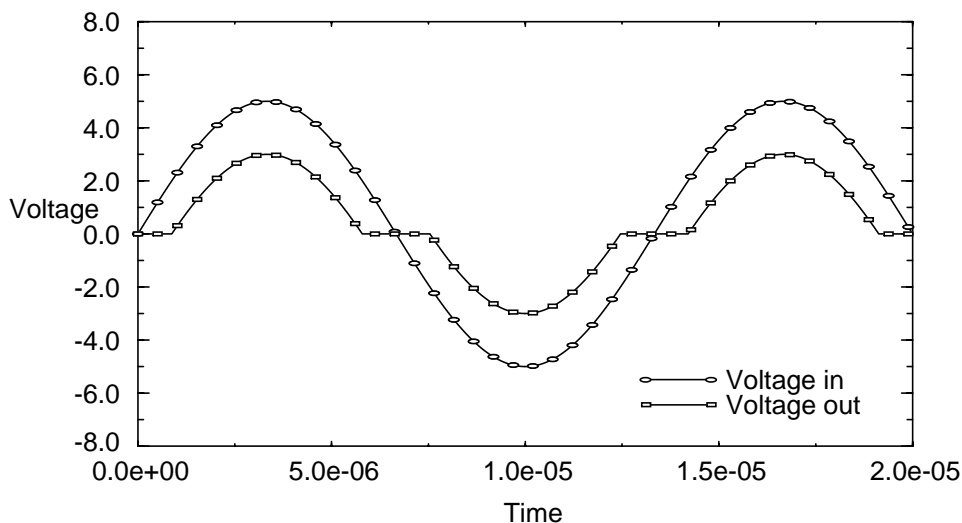

## Using Integration and Differentiation with Analog Signals

The relationships that you define among analog signals can include time domain differentiation and integration. Verilog-A provides a time derivative function, `ddt`, and two time integral functions, `idt` and `idtmod`, that you can use to define such relationships. For example, you might write a behavioral description for an inductor as follows.

```
module induc(p, n);
  inout p, n;
  electrical p, n;
  parameter real L = 0;

  analog
    V(p, n) <+ ddt(L * I(p, n)) ;
endmodule
```

In module `induc`, the voltage across the external ports of the component is defined as equal to the time derivative of `L` times the current flowing between the ports.

To define a higher order derivative, you must use an internal node or signal. For example, module `diff_2` defines internal node `diff`, and sets `V(diff)` equal to the derivative of `V(in)`. Then the module sets `V(out)` equal to the derivative of `V(diff)`, in effect taking the second order derivative of `V(in)`.

```
module diff_2(in, out) ;
  input in ;
  output out ;
  electrical in, out ;
  electrical diff ;    // Defines an internal node.

  analog begin
    V(diff) <+ ddt(V(in)) ;
```



```
        V(out) <+ ddt(V(diff)) ;  
    end  
endmodule
```

For time domain integration, use the `idt` or `idtmod` functions, as illustrated in module `integrator`.

```
module integrator(in, out) ;  
    input in ;  
    output out ;  
    electrical in, out ;  
  
    analog begin  
        V(out) <+ idt(V(in), 0) ;  
    end  
endmodule
```


Module `integrator` sets the output voltage to the integral of the input voltage. The second term in the `idt` function is the initial condition. For more information on `ddt`, `idtmod`, and `idt`, refer to [“Time Derivative Operator”](#) on page 144, [“Circular Integrator Operator”](#) on page 147, and [“Time Integral Operator”](#) on page 145.

## Using Internal Nodes in Modules

Using Verilog-A, you can implement complex designs in a variety of different ways. For example, you can define behavior in modules at the leaf level and use the netlist to define the structure of the system. You can also define structure within modules by defining internal nodes. With internal nodes, you can directly define behavior in the module, or you can introduce internal nodes as a means of solving higher order differential equations that define the network.

### Using Internal Nodes in Behavioral Definitions

Consider the following RLC circuit.

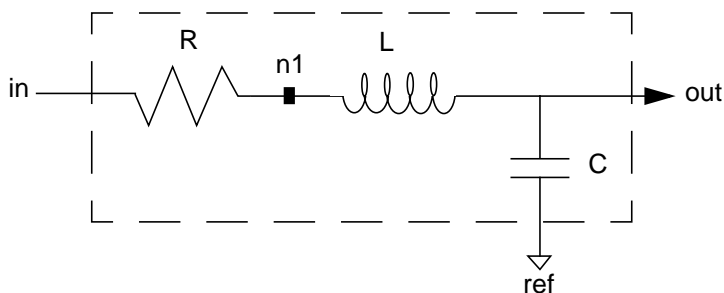

Module `rlc_behav` uses an internal node `n1` and the ports `in`, `ref`, and `out`, to define directly the behavioral characteristics of the RLC circuit. Notice how `n1` does not appear in the list of ports for the module.

```
module rlc_behav(in, out, ref) ;
  inout in, out, ref ;
  electrical in, out, ref ;
  parameter real R=1, L=1, C=1 ;

  electrical n1 ;

  analog begin
    V(in, n1) <+ R*I(in, n1) ;
    V(n1, out) <+ L*ddt(I(n1, out)) ;
    I(out, ref) <+ C*ddt(V(out, ref)) ;
  end
endmodule
```

## Using Internal Nodes in Higher Order Systems

You can also represent the RLC circuit by its governing differential equations. The transfer function is given by

$$H(s) = \frac{1}{LCs^2 + RCs + 1} = \frac{V_{out}}{V_{in}}$$

In the time domain, this becomes

$$V_{out} = V_{in} - R \cdot C \cdot \dot{V}_{out} - L \cdot C \cdot \ddot{V}_{out}$$

If you set

$$V_{n1} = \dot{V}_{out}$$

you can write

$$V_{out} = V_{in} - R \cdot C \cdot V_{n1} - L \cdot C \cdot \dot{V}_{n1}$$

Module `rlc_high_order` implements these descriptions.

```
module rlc_high_order(in, out, ref) ;
  inout in, out, ref ;
  electrical in, out, ref ;
  parameter real R=1, L=1, C=1 ;
```

```
electrical n1 ;  
  
analog begin  
    V(n1, ref) <+ ddt(V(out, ref)) ;  
    V(out, ref) <+ V(in) - (R*C*V(n1) - L*ddt(V(n1))*C) ;  
end  
  
endmodule
```

## Instantiating Modules with Netlists

After you define your Verilog-A modules, you can use them as ordinary primitives in other modules and in Spectre. For information on instantiating modules in netlists, see [Appendix G, “Getting Ready to Simulate.”](#) For additional information about simulating, and for information specifically tailored for using Verilog-A in the Cadence analog design environment, see [Chapter 12, “Using Verilog-A in the Cadence Analog Design Environment.”](#)



---

## Lexical Conventions

---

A Cadence® Verilog®-A source text file is a stream of lexical tokens arranged in free format. For information, see, in this chapter,

- [White Space](#) on page 46
- [Comments](#) on page 46
- [Identifiers](#) on page 46
- [Numbers](#) on page 48

See also

- [Operators for Analog Blocks](#) on page 87
- The information about strings in [Displaying Results](#) on page 165
- [Verilog-A Keywords](#) on page 471

## White Space

White space consists of blanks, tabs, new-line characters, and form feeds. Verilog-A ignores these characters except in strings or when they separate other tokens. For example, this code fragment

```
$strobe("bit error rate = %f%%",  
      100.0 * errors / bits ) ;
```

is syntactically identical to:

```
$strobe("bit error rate = %f%%",100.0*errors/bits);
```

## Comments

In Verilog-A, you can designate a comment in either of two ways.

- A one-line comment starts with the two characters `//` (provided they are not part of a string) and ends with a new-line character. Within a one-line comment, the characters `/`, `/*`, and `*/` have no special meaning. A one-line comment can begin anywhere in the line.

```
//  
// This code fragment contains four one-line comments.  
parameter real vos ; // vos is the offset voltage  
//
```

- A block comment starts with the two characters `/*` (provided they are not part of a string) and ends with the two characters `*/`. Within a block comment, the characters `/*` and `/` have no special meaning.

```
/*  
* This is an example of a block comment. A block  
comment can continue over several lines, making it  
easy to add extended comments to your code.  
*/
```

## Identifiers

You use an identifier to give a unique name to an object, such as a variable declaration or a module, so that the object can be referenced from other places. There are two kinds of identifiers: *ordinary identifiers* and *escaped names*. Both kinds are case sensitive.

## Ordinary Identifiers

The first character of an ordinary identifier must be a letter or an underscore character (`_`), but the remaining characters can be any sequence of letters, digits, dollar signs (`$`), and the underscore. Examples include

```
unity_gain_bandwidth
holdValue
HoldTime
_bus$2
```

## Escaped Names

Escaped names start with the backslash character (`\`) and end with white space. Neither the backslash character nor the terminating white space is part of the identifier. Therefore, the escaped name `\pin2` is the same as the ordinary identifier `pin2`.

An escaped name can include any of the printable ASCII characters (the decimal values 33 through 126 or the hexadecimal values 21 through 7E). Examples of escaped names include

```
\busa+index
\clock
\!!!error-condition!!!
\net1\net2
\{a,b}
\a*(b+c)
```

**Note:** The Spectre® Circuit simulator netlist does not recognize names escaped in this way. In Spectre, characters are individually escaped so that `\!!!error_condition!!!` is referred to as `\!\!\!error_condition\!\!\!` in the Spectre netlist.

## Scope Rules

In Verilog-A, each module, task, function, analog function, and named block that you define creates a new scope. Within a scope, an identifier can declare only one item. This rule means that within a scope you cannot declare two variables with the same name, nor can you give an instance the same name as a node connecting that instance.

Any object referenced from a named block must be declared in one of the following places.

- Within the named block
- Within a named block or module that is higher in the branch of the name tree

To find a referenced object, the simulator first searches the local scope. If the referenced object is not found in the local scope, the simulator moves up the name tree, searching

through containing named blocks until the object is found or the module boundary is reached. If the module boundary is reached before the object is found, the simulator issues an error.

## Numbers

Verilog-A supports two basic literal data types for arithmetic operations: *integer numbers* and *real numbers*.

### Integer Numbers

The syntax for an integer constant is

```
integer_number ::=
    [ sign ] unsign_num

sign ::=
    + | -

unsign_num ::=
    decimal_digit { _ | decimal_digit }

decimal_digit ::=
    0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9
```

The simulator ignores the underscore character ( \_ ), so you can use it anywhere in a decimal number except as the first character. Using the underscore character can make long numbers more legible.

Examples of integer constants include

```
277195000
277_195_000    //Same as the previous number
-634           //A negative number
0005
```

### Real Numbers

The syntax for a real constant is

```
real_number ::=
    [ sign ] unsign_num . unsign_num
    | [ sign ] unsign_num [ . unsign_num ] e [ sign ] unsign_num
    | [ sign ] unsign_num [ . unsign_num ] E [ sign ] unsign_num
    | [ sign ] unsign_num [ . unsign_num ] unit_letter

sign ::=
    + | -

unsign_num ::=
    decimal_digit { _ | decimal_digit }
```



## Cadence Verilog-A Language Reference

### Lexical Conventions

---

```
decimal_digit ::=  
    0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9  
unit_letter ::=  
    T | G | M | K | k | m | u | n | p | f | a
```

`unit_letter` represents one of the scale factors listed in the following table. If you use `unit_letter`, you must not have any white space between the number and the letter. Be certain that you use the correct case for the `unit_letter`.

unit_letter	Scale factor	unit_letter	Scale factor
T =	$10^{12}$	k =	$10^3$
G =	$10^9$	m =	$10^{-3}$
M =	$10^6$	u =	$10^{-6}$
K =	$10^3$	n =	$10^{-9}$
		p =	$10^{-12}$
		f =	$10^{-15}$
		a =	$10^{-18}$

The simulator ignores the underscore character ( `_` ), so you can use it anywhere in a real number except as the first character. Using the underscore character can make long numbers more legible.

Examples of real constants include

```
2.5K           // 2500  
1e-6           // 0.000001  
-9.6e9  
-1e-4  
0.1u  
50p            // 50 * 10e-12  
1.2G           // 1.2 * 10e9  
213_116.223_642
```

For information on converting real numbers to integer numbers, see [“Converting Real Numbers to Integer Numbers”](#) on page 53.

## **Cadence Verilog-A Language Reference**

### Lexical Conventions

---

---

## Data Types and Objects

---

The Cadence® Verilog®-A language defines these data types and objects. For information about how to use them, see the indicated locations.

- [Integer Numbers](#) on page 52
- [Real Numbers](#) on page 52
- [Parameters](#) on page 54
- [Local Parameters](#) on page 59
- [String Parameters](#) on page 59
- [Parameter Aliases](#) on page 59
- [Paramsets](#) on page 60
- [Genvars](#) on page 62
- [Natures](#) on page 63
- [Disciplines](#) on page 66
- [Net Disciplines](#) on page 70
- [Named Branches](#) on page 72
- [Implicit Branches](#) on page 73
- Digital Nets and Registers

## Integer Numbers

Use the `integer` declaration to declare variables of type `integer`.

```
integer_declaration ::=
    integer list_of_identifiers ;
list_of_identifiers ::=
    var_name { , var_name }
var_name ::=
    variable_identifier
    | array_identifier [ range ]
range ::=
    upper_limit_const_exp : lower_limit_const_exp
```

In Verilog-A, you can declare an integer number in a range at least as great as  $-2^{31}$  (-2,147,483,648) to  $2^{31}-1$  (2,147,483,647).

To declare an array, specify the upper and lower indexes of the range. Be sure that each index is a constant expression that evaluates to an integer value.

```
integer a[1:64] ;           // Declares array of 64 integers
integer b, c, d[-20:0] ;    // Declares 2 integers and an array
parameter integer max_size = 15 from [1:50] ;
integer cur_vector[1:max_size] ;
/* If the max_size parameter is not overridden, the
previous two statements declare an array of 15 integers. */
```

The standard attributes for descriptions and units can be used with integer declarations. For example,

```
(* desc="index number", units="index" *) integer indx;
```

Although the `desc` and `units` attributes are allowed, Cadence tools, in this release, do nothing with the information.

## Real Numbers

Use the `real` declaration to declare variables of type `real`.

```
real_declaration ::=
    real list_of_identifiers ;
list_of_identifiers ::=
    var_name { , var_name }
var_name ::=
    variable_identifier
    | array_identifier [ range ]
range ::=
    upper_limit_const_exp : lower_limit_const_exp
```

In Verilog-A, you can declare real numbers in a range at least as great as  $10^{-37}$  to  $10^{+37}$ . To declare an array of real numbers, specify the upper and lower indexes of the range. Be sure that each index is a constant expression that evaluates to an integer value.

```
real a[1:64] ;           // Declares array of 64 reals
real b, c, d[-20:0] ;    // Declares 2 reals and an array of reals
parameter integer min_size = 1, max_size = 30 ;
real cur_vector[min_size:max_size] ;
/* If the two parameters are not overridden, the
previous two statements declare an array of 30 reals. */
```

Real variables have default initial values of zero.

The standard attributes for descriptions and units can be used with real declarations. For example,

```
(* desc="gate-source capacitance", units="F" *) real cgs;
```

Although the `desc` and `units` attributes are allowed, Cadence tools, in this release, do nothing with the information.

## Converting Real Numbers to Integer Numbers

Verilog-A converts a real number to an integer number by rounding the real number to the nearest integer. If the real number is equally distant from the two nearest integers, Verilog-A converts the real number to the integer farthest from zero. The following code fragment illustrates what happens when real numbers are assigned to integer numbers.

```
integer    intvalA, intvalB, intvalC ;
real       realvalA, realvalB, realvalC ;
realvalA = -1.7 ;
intvalA = realvalA ; // intvalA is -2
realvalB = 1.5 ;
intvalB = realvalB ; // intvalB is 2
realvalC = -1.5 ;
intvalC = realvalC ; // intvalC is -2
```

If either operand in an expression is real, Verilog-A converts the other operand to real before applying the operator. This conversion process can result in a loss of information.

```
real realvar ;
realvar = 9.0 ;
realvar = 2/3 * realvar ; // realvar is 9.0, not 6.0
```

In this example, both 2 and 3 are integers, so 1 is the result of the division. Verilog-A converts 1 to 1.0 before multiplying the converted number by 9.0.

## Strings

Use the `string` declaration to declare variables of type `string`.

```
string_declaration ::=
    string list_of_identifiers ;
list_of_identifiers ::=
    variable_identifier { , variable_identifier }
var_name ::=
    variable_identifier
```

A string is defined as follows:

```
string ::=
    " { Any_ASCII_character_except_newline } "
```

For example,

```
string tmpString, difString;
tmpString="Temporary string";
difString="Different string";
```

## Parameters

Use the `parameter` declaration to specify the parameters of a module.

```
parameter_declaration ::=
    parameter [opt_type] list_of_param_assignments ;
opt_type ::=
    real
    | integer
    | string
list_of_param_assignments ::=
    declarator_init { , declarator_init }
declarator_init ::=
    parameter_id = constant_exp { opt_value_range }
    | parameter_array_init
```

`opt_type` is described in [“Specifying a Parameter Type”](#) on page 56. Note that for parameter arrays, however, you must specify a type.

`opt_value_range` is described in [“Specifying Permissible Values”](#) on page 56.

`parameter_id` is the name of a parameter being declared.

`param_array_init` is described in [“Specifying Parameter Arrays”](#) on page 58.

As specified in the syntax, the right-hand side of each `declarator_init` assignment must be a constant expression. You can include in the constant expression only constant numbers and previously defined parameters.

## Cadence Verilog-A Language Reference

### Data Types and Objects

---

Parameters are constants, so you cannot change the value of a parameter at runtime. However, you can customize module instances by changing parameter values during compilation. See [“Overriding Parameter Values in Instances”](#) on page 185 for more information.

Consider the following code fragment. The parameter `superior` is defined by a constant expression that includes the parameter `subord`.

```
parameter integer subord = 8 ;
parameter integer superior = 3 * subord ;
```

In this example, changing the value of `subord` changes the value of `superior` too because the value of `superior` depends on the value of `subord`.

The standard attributes for descriptions and units can be used with parameter declarations. For example,

```
(* desc="Resistance", units="ohms" *) parameter real res = 1.0 from [0:inf];
```

Although the `desc` and `units` attributes are allowed, Cadence tools, in this release, do nothing with the information.

The attribute for inherited parameters, `(* cds_inherited_parameter *)`, can also be used with parameter declarations (and only with parameter declarations) to obtain parameter values directly from the hierarchy where the module is instantiated. This attribute enables Monte Carlo mismatch for Verilog-A devices.

The inherited parameter attribute is subject to the following requirements:

- The parameter that is to be inherited must be defined in the hierarchy.
- The type of the parameter must be real. Integer and string parameters cannot be inherited.
- The inherited parameter must be initialized to a value of zero.
- The value of an inherited parameter must not be changed by the instantiation statement for the module. However, an ordinary parameter whose values is set by referring to an inherited parameter can be changed by the instantiation statement.

For example, to run the `ahdlLib.res` cell in Monte Carlo, you modify the Verilog-A model to be something like this:

```
module res(vp, vn);
inout vp, vn;
electrical vp, vn;
(* cds_inherited_parameter *) parameter real monteres = 0;
parameter real r = 1k;
localparam real r_effective = r + monteres; // nominal resistance plus
// monte-carlo mismatch effect
```

```
analog
    V(vp, vn) <+ (r_effective)*I(vp, vn);
endmodule
```

In this case, `monteres` is the mismatch parameter. It must be defined in a model deck as a `parameters` statement or be defined in the design variables section of the user interface.

You also need a `statistics mismatch` block in your model deck that describes the distribution for `monteres`. For example:

```
parameters monteres=10
statistics {
    mismatch {
        vary monteres dist=gauss std=5
    }
}
```

## Specifying a Parameter Type

You must specify a default for each parameter you define, but the parameter type specifier is optional (except that you must specify a type for parameter arrays). If you omit the parameter type specifier, Verilog-A determines the parameter type from the constant expression. If you do specify a type, and it conflicts with the type of the constant expression, your specified type takes precedence.

The three parameter declarations in the following examples all have the same effect. The first example illustrates a case where the type of the expression agrees with the type specified for the parameter.

```
parameter integer rate = 13 ;
```

The second example omits the parameter type, so Verilog-A derives it from the integer type of the expression.

```
parameter rate = 13 ;
```

In the third example, the expression type is real, which conflicts with the specified parameter type. The specified type, integer, takes precedence.

```
parameter integer rate = 13.0
```

In all three cases, `rate` is declared as an integer parameter with the value 13.

## Specifying Permissible Values

Use the optional range specification to designate permissible values for a parameter. If you need to, you can specify more than one range.



## Cadence Verilog-A Language Reference

### Data Types and Objects

---

```
opt_value_range ::=
    from value_range_specifier
    | exclude value_range_specifier
    | exclude value_constant_expression
value_range_specifier ::=
    start_paren expression1 : expression2 end_paren
start_paren ::=
    [
    | (
end_paren ::=
    ]
    | )
expression1 ::=
    constant_expression
    | -inf
expression2 ::=
    constant_expression
    | inf
```

Ensure that the first expression in each range specifier is smaller than the second expression. Use a bracket, either “[” for the lower bound or “]” for the upper, to include an end point in the range. Use a parenthesis, either “(” for the lower bound or “)” for the upper, to exclude an end point from the range. To indicate the value infinity in a range, use the keyword `inf`. To indicate negative infinity, use `-inf`.

For example, the following declaration gives the parameter `cur_val` the default of -15.0. The range specification allows `cur_val` to acquire values in the range  $-\infty < \text{cur\_val} < 0$ .

```
parameter real maxval = 0.0 ;
parameter real cur_val = -15.0 from (-inf:maxval) ;
```

The following declaration

```
parameter integer pos_val = 30 from (0:40] ;
```

gives the parameter `pos_val` the default of 30. The range specification for `pos_val` allows it to acquire values in the range  $0 < \text{pos\_val} \leq 40$ .

In addition to defining a range of permissible values for a parameter, you can use the keyword `exclude` to define certain values as illegal.

```
parameter low = 10 ;
parameter high = 20 ;
parameter integer intval = 0 from [0:inf) exclude (low:high] exclude 5 ;
```

In this example, both a range of values,  $10 < \text{value} \leq 20$ , and the single value 5 are defined as illegal for the parameter `intval`.

## Specifying Parameter Arrays

Use the parameter array initiation part of the parameter declaration ([“Parameters”](#) on page 54) to specify information for parameter arrays.

```
parameter_array_init ::=
    parameter_array_id range = constant_param_arrayinit {opt_value_range}
range ::=
    [ constant_expression : constant_expression ]
constant_param_arrayinit ::=
    { param_arrayinit_element_list }
    |   \{ param_arrayinit_element_list }
    |   \{ replicator_element_list }
param_arrayinit_element_list ::=
    constant_expression { , constant_expression }
replicator_element_list ::=
    |   replicator_constant_expression {constant_expression}
```

*parameter\_array\_id* is the name of a parameter array being declared.

*opt\_value\_range* is described in [“Specifying Permissible Values”](#) on page 56.

*replicator\_constant\_expression* is an integer constant with a value greater than zero that specifies the number of times the associated *constant\_expression* is to be included in the element list.

For example, parameter arrays might be declared and used as follows:

```
parameter integer
    IVgc_length = 4;
parameter real
    I_gc[1:IVgc_length] = \{4{0.00}\};
    V_gc[1:IVgc_length] = \{-5.00, -1.00, 5.00, 10.00\};
```

Parameter arrays are subject to the following restrictions:

- The type of a parameter array must be specified in the declaration.
- An array assigned to an instance of a module must be of the exact size of the array bounds of that instance.
- If the array size is changed via a parameter assignment, the parameter array must be assigned an array of the new size from the same module as the parameter assignment that changed the parameter array size.

## Local Parameters

Use the `localparam` declaration to specify the parameters of a module.

```
parameter_declaration ::=  
    localparam [opt_type] list_of_param_assignments ;
```

Local parameters cannot be directly modified by ordered or named parameter value assignments.

## String Parameters

Use the `string` parameter declaration to declare a parameter of type string.

```
string_parameter_declaration ::=  
    parameter string stringparam = constant_expression ;
```

*stringparam* is the name of the string parameter being declared.

*constant\_expression* is the value to be assumed by *stringparam*.

For example, the following code declares a string parameter named `tmdata` and gives it the value `table1.dat`.

```
parameter string tmdata = "table1.dat" ;
```

This parameter can, for example, be used to specify the data file for the `$table_model` function.

```
analog begin  
    I(d, s) <+ $table_model (V(g, s), V(d, s), tmdata, "I,3CL,3CL");  
end
```

## Parameter Aliases

Use the `aliasparam` declaration to define one or more aliases for a parameter. With this capability, you can define alternative names that can be used for overriding module parameter values.

```
aliasparam_declaration ::=  
    aliasparam alias_identifier = parameter_identifier ;
```

Parameter aliases are subject to the following restrictions.

- The *alias\_identifier* must not be used for any other object in the module. Equations in the module must reference *parameter\_identifier*, not *alias\_identifier*.

- You must not use both an *alias\_identifier* and its corresponding *parameter\_identifier* to specify a parameter override. Similarly, you must not use multiple aliases corresponding to a single *parameter\_identifier* to specify a parameter override.

For example, the module `nmos` includes the following declarations.

```
parameter real dtemp = 0 from [-`P_CELSIUS0:inf) ;  
aliasparam trise = dtemp ;
```

The first two instantiations of the module below are valid, but the third is not.

```
nmos #(.trise()) m1(.d(d), .g(g), .s(s), .b(b)) ;  
nmos #(.dtemp(5)) m2(.d(), .g(g), .s(s), .b(b)) ;  
nmos #(.trise(5), .dtemp(5)) m3(.d(d), .g(g), .s(s), .b(b)) ; // Illegal.
```

The third instantiation is illegal because overrides are specified for both the parameter `dtemp` and its alias, `trise`.

## Paramsets

Use the `paramset` declaration to declare a set of parameters for a particular module, such that each instance of the paramset need only provide overrides for a smaller number of parameters. The paramset must not contain behavioral code; all of the behavior is determined by the associated module. For information on instantiating paramsets, see [“Overriding Parameter Values by Using Paramsets”](#) on page 186.

```
paramset_declaration ::=  
    {attribute_instance} paramset paramset_name module_or_paramset ;  
    paramset_item_declaration {paramset_item_declaration}  
    paramset_statement { paramset_statement }  
    endparamset  
  
paramset_item_declaration ::=  
    {attribute_instance} parameter_declaration  
    | {attribute_instance} local_parameter_declaration  
    | {attribute_instance} string_parameter_declaration  
    | {attribute_instance} local_string_parameter_declaration  
    | aliasparam_declaration  
    | {attribute_instance} integer_declaration  
    | {attribute_instance} real_declaration  
  
paramset_statement ::=  
    .module_parameter_id = constant_expression ;  
    | statement
```

`attribute_instance` is a description attribute, to be used by the simulator when generating help messages for the paramset.

*paramset\_name* is the name of the paramset being defined. Multiple paramsets can be declared using the same *paramset\_name*, but paramsets of the same name must all reference the same module.

*module\_or\_paramset* is the name of a non-structural module with which the paramset is associated or the name of a second paramset. A chain of paramsets can be defined, but the last paramset in the chain must reference a non-structural module.

*module\_parameter\_id* is a parameter of the associated module.

*constant\_expression* is a value to be assigned to the parameter of the associated module. The *constant\_expression* can include numbers, and parameters, but hierarchical out-of-module references to parameters of different modules are unsupported and cannot be included.

*paramset\_statement* can use any statements available for conditional execution but must not include the following:

- Access functions
- Contribution statements
- Event control statements
- Named blocks

Paramset statements can assign values to variables declared in the paramset and the values for such variables do not need to be constant expressions. However, these variables cannot be used to assign values to the parameters of the modules.

Paramsets are subject to the following restrictions:

- Using the *alter* and *altergroup* statements is unsupported when paramsets are used.
- Paramsets cannot be stored in the Cadence library.cell:view configurations, which are sometimes referred to as 5.X configurations.

## Paramset Output Variables

Integer or real variables that are declared with descriptions in the paramset are considered paramset output variables for instances that use the paramset. The following rules apply to paramset output variables and to the output variables of modules referenced by a paramset:

- If a paramset output variable has the same name as a module output variable, the value of the paramset output variable is the value that is reported for any instance that uses the paramset.

- If a paramset variable without a description has the same name as a module output variable, the module output variable of that name is not available for any instance that uses the paramset.

## Genvars

Use the `genvar` declaration to specify a list of integer-valued variables used to compose static expressions for use with behavioral loops.

```
genvar_declaration ::=  
    genvar genvar_identifier {, genvar_identifier}
```

Genvar variables can be assigned only in limited contexts, such as accessing analog signals within behavioral looping constructs. For example, in the following fragment, the genvar variable `i` can only be assigned within the control of the `for` loop. Assignments to the genvar variable `i` can consist of only expressions of static values, such as parameters, literals, and other genvar variables.

```
genvar i ;  
analog begin  
    ...  
    for (i = 0; i < 8; i = i + 1) begin  
        V(out[i]) <+ transition(value[i], td, tr) ;  
    end  
    ...  
end
```

The next example illustrates how genvar variables can be nested.

```
module gen_case(in,out);  
input [0:1] in;  
output [0:1] out;  
electrical [0:1] in;  
electrical [0:1] out;  
genvar i, j;  
    analog begin  
        for( i=1 ; i<0 || i <= 4; i = i + 1 ) begin  
            for( j = 0 ; j < 4 ; j = j + 1 ) begin  
                $strobe("%d %d", j, i);  
            end  
        end  
        for( j = 0; j < 2; j = j + 1 ) begin  
            V(out[j], in[j]) <+ I(out[j], in[j]);  
        end  
    end  
endmodule
```

A *genvar expression* is an expression that consists of only literals and genvar variables. You can also use the `$param_given` function in genvar expressions.

## Natures

Use the nature declaration to define a collection of attributes as a nature. The attributes of a nature characterize the analog quantities that are solved for during a simulation. Attributes define the units (such as meter, gram, and newton), access symbols and tolerances associated with an analog quantity, and can define other characteristics as well. After you define a nature, you can use it as part of the definition of disciplines and other natures.

```
nature_declaration ::=
    nature nature_name
    [ nature_descriptions ]
    endnature

nature_name ::=
    nature_identifier

nature_descriptions ::=
    nature_description
    | nature_description nature_descriptions

nature_description ::=
    attribute = constant_expression ;

attribute ::=
    abstol
    | access
    | ddt_nature
    | idt_nature
    | units
    | identifier
    | Cadence_specific_attribute

Cadence_specific_attribute ::=
    huge
    | blowup
    | maxdelta
```

Each of your nature declarations must

- Be named with a unique identifier
- Include all the required attributes listed in [Table 4-3](#) on page 65.
- Be declared at the top level

This requirement means that you cannot nest nature declarations inside other nature, discipline, or module declarations.

The Verilog-A language specification allows you to define a nature in two ways. One way is to define the nature directly by describing its attributes. A nature defined in this way is a *base nature*, one that is not derived from another already declared nature or discipline.

The other way you can define a nature is to derive it from another nature or a discipline. In this case, the new nature is called a *derived nature*.

**Note:** This release of Verilog-A does not support derived natures.

## Declaring a Base Nature

To declare a base nature, you define the attributes of the nature. For example, the following code declares the nature `current` by specifying five attributes. As required by the syntax, the expression associated with each attribute must be a constant expression.

```
nature Mycurrent
    units = "A" ;
    access = I ;
    idt_nature = charge ;
    abstol = 1e-12 ;
    huge = 1e6 ;
endnature
```

Verilog-A provides the predefined attributes described in the “Predefined Attributes” table. Cadence provides the additional attributes described in [Table 4-2](#) on page 65. You can also declare user-defined attributes by declaring them just as you declare the predefined attributes. The Spectre® circuit ignores user-defined attributes, but other simulators might recognize them. When you code user-defined attributes, be certain that the name of each attribute is unique in the nature you are defining.

The following table describes the predefined attributes.

**Table 4-1 Predefined Attributes**

Attribute	Description
<code>abstol</code>	Specifies a tolerance measure used by the simulator to determine when potential or flow calculations have converged. <code>abstol</code> specifies the maximum negligible value for signals associated with the nature. For more information, see <a href="#">“Convergence”</a> on page 271.
<code>access</code>	Identifies the name of the access function for this nature. When this nature is bound to a potential value, <code>access</code> is the access function for the potential. Similarly, when this nature is bound to a flow value, <code>access</code> is the access function for the flow. Each access function must have a unique name.
<code>units</code>	Specifies the units to be used for the value accessed by the access function.
<code>idt_nature</code>	Specifies a nature to apply when the <code>idt</code> or <code>idtmod</code> operators are used. <b>Note:</b> This release of Verilog-A ignores this attribute.
<code>ddt_nature</code>	Specifies a nature to apply when the <code>ddt</code> operator is used. <b>Note:</b> This release of Verilog-A ignores this attribute.



## Cadence Verilog-A Language Reference

### Data Types and Objects

The next table describes the Cadence-specific attributes.

**Table 4-2 Cadence-Specific Attributes**

Attribute	Description
huge	Specifies the maximum change in signal value allowed during a single iteration. The simulator uses <code>huge</code> to facilitate convergence when signal values are very large. Default: 45.036e06
blowup	Specifies the maximum allowed value for signals associated with the nature. If the signal exceeds this value, the simulator reports an error and stops running. Default: 1.0e09
maxdelta	Specifies the maximum change allowed on a Newton-Raphson iteration. Default: 0.3

The next table specifies the requirements for the predefined and Cadence-specific attributes.

**Table 4-3 Attribute Requirements**

Attribute	Required or optional?	The constant expression must be
abstol	Required	A real value
access	Required for all base natures	An identifier
units	Required for all base natures	A string
idt_nature	Optional	The name of a nature defined elsewhere
ddt_nature	Optional	The name of a nature defined elsewhere
huge	Optional	A real value
blowup	Optional	A real value
maxdelta	Optional	A real value

Consider the following code fragment, which declares two base natures.

```
nature Charge
    abstol = 1e-14 ;
    access = Q ;
    units = "coul" ;
    blowup = 1e8 ;
endnature
```

```
nature Current
  abstol = 1e-12 ;
  access = I ;
  units = "A" ;
endnature
```

Both nature declarations specify all the required attributes: `abstol`, `access`, and `units`. In each case, `abstol` is assigned a real value, `access` is assigned an identifier, and `units` is assigned a string.

The `Charge` declaration includes an optional Cadence-specific attribute called `blowup` that ends the simulation if the charge exceeds the specified value.

## Disciplines

Use the discipline declaration to specify the characteristics of a discipline. You can then use the discipline to declare nets.

```
discipline_declaration ::=
    discipline discipline_identifier
    [ discipline_description { discipline_description } ]
    enddiscipline

discipline_description ::=
    nature_binding
    | domain_binding

nature_binding ::=
    potential nature_identifier ;
    | flow nature_identifier ;

domain_binding ::=
    domain continuous ;
    | domain discrete ;
```

You must declare a discipline at the top level. In other words, you cannot nest a discipline declaration inside other discipline, nature, or module declarations. Discipline identifiers have global scope, so you can use discipline identifiers to associate nets with disciplines (declare nets) inside any module.

Although you can declare discrete disciplines, you must not instantiate any objects that use such disciplines.

## Binding Natures with Potential and Flow

The disciplines that you declare can bind

- One nature with potential
- One nature with potential and a different nature with flow

■ Nothing with either potential or flow

A declaration of this latter form defines an *empty discipline*.

The following examples illustrate each of these forms.

The first example defines a single binding, one between potential and the nature `Voltage`. A discipline with a single binding is called a *signal-flow* discipline.

```
discipline voltage
    potential Voltage ; // A signal-flow discipline must be bound to potential.
enddiscipline
```


The next declaration, for the `electrical` discipline, defines two bindings. Such a declaration is called a *conservative discipline*.

```
discipline electrical
    potential Voltage ;
    flow Current ;
enddiscipline
```

When you define a conservative discipline, you must be sure that the nature bound to potential is different from the nature bound to flow.

The third declaration defines an empty discipline. If you do not explicitly specify a domain for an empty discipline, the domain is determined by the connectivity of the net.

```
discipline neutral
enddiscipline
discipline interconnect
    domain continuous
enddiscipline
```



In addition to declaring empty disciplines, you can also use a Verilog-A predefined empty discipline called `wire`.

Use an empty discipline when you want to let the components connected to a net determine which potential and flow natures are used for the net.


Verilog-A supports only the continuous discipline. You can declare a signal as discrete but you cannot otherwise use such a signal.

## Compatibility of Disciplines

Certain operations in Verilog-A, such as declaring branches, are allowed only if the disciplines involved are compatible. Apply the following rules to determine whether any two disciplines are compatible.

- Any discipline is compatible with itself.
- An empty discipline is compatible with all disciplines.
- Other kinds of continuous disciplines are compatible or not compatible, as determined by following paths through [Figure 4-1](#) on page 68.

**Figure 4-1 Analog Discipline Compatibility**

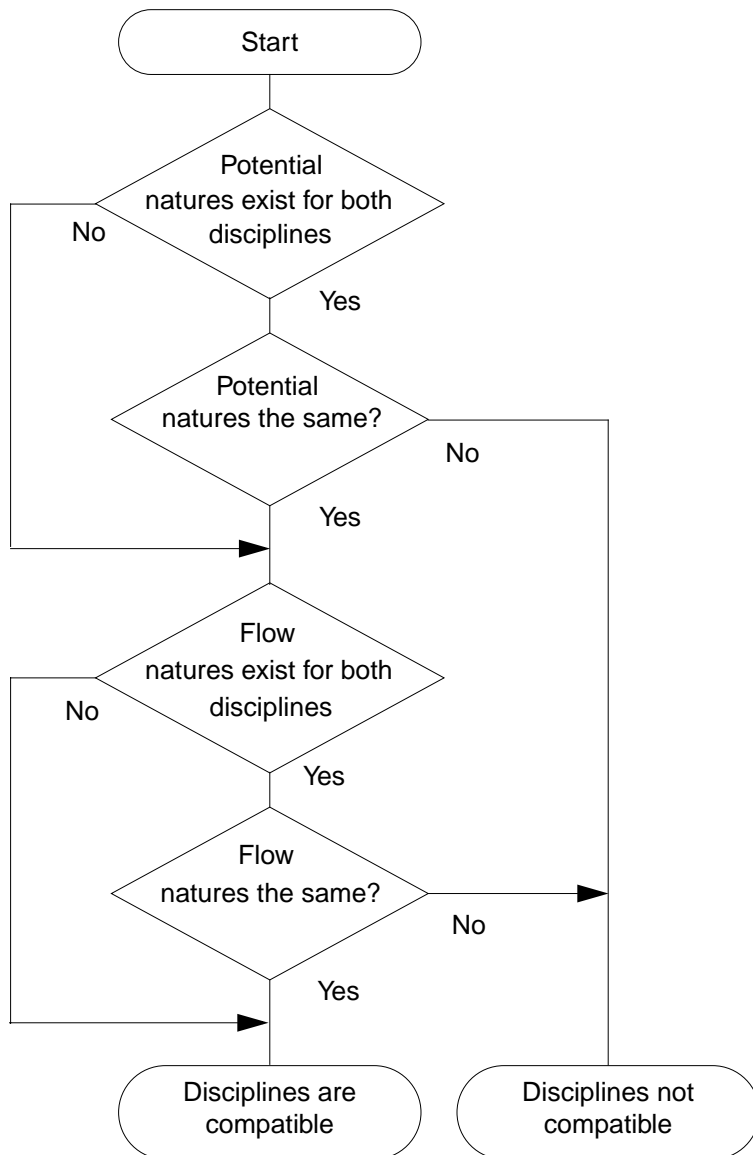

Consider the following declarations.

## Cadence Verilog-A Language Reference

### Data Types and Objects

---

```
nature Voltage
  access = V ;
  units = "V" ;
  abstol = 1u ;
endnature

nature Current
  access = I ;
  units = "A" ;
  abstol = 1p ;
endnature

discipline emptydis
enddiscipline

discipline electrical
  potential Voltage ;
  flow Current ;
enddiscipline

discipline sig_flow_v
  potential Voltage ;
enddiscipline
```

To determine whether the `electrical` and `sig_flow_v` disciplines are compatible, follow through the discipline compatibility chart:

1. Both `electrical` and `sig_flow_v` have defined natures for potential. Take the *Yes* branch.
2. In fact, `electrical` and `sig_flow_v` have the same nature for potential. Take the *Yes* branch.
3. `electrical` has a defined nature for flow, but `sig_flow_v` does not. Take the *No* branch to the *Disciplines are compatible* end point.

Now add these declarations to the previous lists.

```
nature Position
  access = x ;
  units = "m" ;
  abstol = 1u ;
endnature

nature Force
  access = F ;
  units = "N" ;
  abstol = 1n ;
endnature

discipline mechanical
  potential Position ;
  flow force ;
enddiscipline
```

The `electrical` and `mechanical` disciplines are not compatible.

1. Both disciplines have defined natures for potential. Take the *Yes* branch.

2. The `Position` nature is not the same as the `Voltage` nature. Take the *No* branch to the *Disciplines not compatible* end point.

## Net Disciplines

Use the net discipline declaration to associate nets with previously defined disciplines.

```
net_discipline_declaration ::=
    discipline_identifier [range] list_of_nets ;
    | wire [range] list_of_nets ;
range ::=
    [ msb_expr : lsb_expr ]
list_of_nets ::=
    net_type
    | net_type , list_of_nets
msb_expr ::=
    constant_expr
lsb_expression ::=
    constant_expr
net_type ::=
    net_identifier [range] [= constant_expr | constant_array_expr]
```

The standard attribute for descriptions can be used with net discipline declarations. For example,

```
(* desc="drain terminal" *) electrical d;
```

Although the `desc` attribute is allowed, Cadence tools, in this release, do nothing with the information.

The initializers specified with the equals sign in the `net_type` can be used only when the `discipline_identifier` is a continuous discipline. The solver uses the initializer, if provided, as a nodeset value for the potential of the net. A null value in the `constant_array_expr` means that no nodeset value is being specified for that element of the bus. The initializers cannot include out-of-module references.

A net declared without a range is called a *scalar net*. A net declared with a range is called a *vector net*. In this release of Verilog-A, you cannot use parameters to define range limits.

```
magnetic inductor1, inductor2 ;           //Declares two scalar nets
electrical [1:10] node1 ;                 //Declares a vector net
wire [3:0] connect1, connect2 ;          //Declares two vector nets
electrical [0:4] bus = {2.3,4.5,,6.0} ;   //Declares vector net with nodeset values
```

The following example is illegal because a range, if defined, must be the first item after the discipline identifier and then applies to all of the listed net identifiers.

```
electrical AVDD, AVSS, BGAVSS, PD, SUB, [6:1] TRIM ;    // Illegal
```

**Note:** Cadence recommends that you specify the direction of a port before you specify the discipline. For example, in the following example the directions for `out` and `in` are specified before the `electrical` discipline declaration.

Consider the following declarations.

```
discipline emptydis
enddiscipline

module compl (out, in, unknown1, unknown2) ;
output out ;
input in ;
electrical out, in ;
emptydis unknown1 ;           // Declared with an empty discipline
analog
    V(out) <+ 2 * V(in)
endmodule
```

Module `compl` has four ports: `out`, `in`, `unknown1`, and `unknown2`. The module declares `out` and `in` as `electrical` ports and uses them in the `analog` block. The port `unknown1` is declared with an `empty` discipline and cannot be used in the `analog` block because there is no way to access its signals. However, `unknown1` can be used in the list of ports, where it inherits natures from the ports of module instances that connect to it.

Because `unknown2` appears in the list of ports without being declared in the body of the module, Verilog-A implicitly declares `unknown2` as a scalar port with the default discipline. The default discipline type is `wire`.

Now consider a different example.

```
module five_inputs( portbus );
input [0:5] portbus;
electrical [0:5] portbus;
real x;
analog begin
    generate i ( 0,4 )
        V(portbus[i]) <+ 0.0;
    end
endmodule
```

The `five_inputs` module uses a port bus. Only one port name, `portbus`, appears in the list of ports but inside the module `portbus` is defined with a range.

Modules `compl` and `five_inputs` illustrate the two ways you can use nets in a module.

- You can define the ports of a module by giving a list of nets on the module statement.
- You can describe the behavior of a module by declaring and using nets within the body of the module construct.

As you might expect, if you want to describe a conservative system, you must use conservative disciplines to define nets. If you want to describe a signal-flow or mixed signal-flow and conservative system, you can define nets with signal-flow disciplines.

As a result of port connections of analog nets, a single node can be bound to a number of nets of different disciplines.

Current contributions to a node that is bound only to disciplines that have only potential natures, are illegal. The potential of such a node is the sum of all potential contributions, but flow for such a node is not defined.

Nets of signal flow disciplines in modules must not be bound to inout ports and you must not contribute potential to input ports.

To access the `abstol` associated with a nets's potential or flow natures, use the form

```
net.potential.abstol
```

or

```
net.flow.abstol
```

For an example, see [“Cross Event”](#) on page 112.

## Named Branches

Use the branch declaration to declare a path between two nets of continuous discipline. Cadence recommends that you use named branches, especially when debugging with Tcl commands because, for example, it is easier to type `value branch1` than it is to type `value \vect1[5] vect2[1]` and then compute the difference between the returned value.

```
branch_declaration ::=
    branch list_of_branches ;
list_of_branches ::=
    terminals list_of_branch_identifiers
terminals ::=
    ( scalar_net_identifier )
    | ( scalar_net_identifier , scalar_net_identifier )
list_of_branch_identifiers ::=
    branch_identifier
    | branch_identifier , list_of_branch_identifiers
```

*scalar\_net\_identifier* must be either a scalar net or a single element of a vector net.

You can declare branches only in a module. You must not combine explicit and implicit branch declarations for a single branch. For more information, see [“Implicit Branches”](#) on page 73.



The scalar nets that the branch declaration associates with a branch are called the *branch terminals*. If you specify only one net, Verilog-A assumes that the other is ground. The branch terminals must have compatible disciplines. For more information, see [“Compatibility of Disciplines”](#) on page 67.

Consider the following declarations.

```
voltage [5:0] vec1 ;           // Declares a vector net
voltage [1:6] vec2 ;           // Declares a vector net
voltage sca1 ;                 // Declares a scalar net
voltage sca2 ;                 // Declares a scalar net
branch (vec1[5],vec2[1]) branch1, (sca1,sca2) branch2 ;
```

branch1 is legally declared because each branch terminal is a single element of a vector net. The second branch, branch2, is also legally declared because nodes sca1 and sca2 are both scalar nets.

## Implicit Branches

As Cadence recommends, you can refer to a named branch with only a single identifier. Alternatively, you might find it more convenient or clearer to refer to branches by their branch terminals. Most of the examples in this reference, including the following example, use this form of implicit branch declaration. You must not, however, combine named and implicit branch declarations for a single branch.

```
module diode (a, c) ;
inout a, c ;
electrical a, c ;
parameter real rs=0, is=1e-14, tf=0, cjo=0, phi=0.7 ;
parameter real kf=0, af=1, ef=1 ;
analog begin
    I(a, c) <+ is*(limexp((V(a, c)-rs*I(a, a))/ $vt) - 1);
    I(a, c) <+ white_noise(2* `P_Q * I(a, c)) ;
    I(a, c) <+ flicker_noise(kf*pow(abs(I(a, c)),af),ef);
end
endmodule
```

The previous example using implicit branches is equivalent to the following example using named branches.

```
module diode (a, c) ;
inout a, c ;
electrical a, c ;
branch (a,c) diode, (a,a) anode ; // Declare named branches
parameter real rs=0, is=1e-14, tf=0, cjo=0, phi=0.7 ;
parameter real kf=0, af=1, ef=1 ;
analog begin
    I(diode) <+ is*(limexp((V(diode)-rs*I(anode))/ $vt) - 1);
    I(diode) <+ white_noise(2* `P_Q * I(diode)) ;
    I(diode) <+ flicker_noise(kf*pow(abs(I(diode)),af),ef);
end
endmodule
```

# **Cadence Verilog-A Language Reference**

## **Data Types and Objects**

---

---

## Statements for the Analog Block

---

This chapter describes the assignment statements and the procedural control constructs and statements that the Cadence® Verilog®-A language supports within the analog block. For information, see the indicated locations. The constructs and statements discussed include

- [Procedural Assignment Statements in the Analog Block](#) on page 76
- [Branch Contribution Statement](#) on page 76
- [Indirect Branch Assignment Statement](#) on page 78
- [Sequential Block Statement](#) on page 79
- [Conditional Statement](#) on page 80
- [Case Statement](#) on page 80
- Loop statements, including
  - [Repeat Statement](#) on page 81
  - [While Statement](#) on page 82
  - [For Statement](#) on page 82
- [Generate Statement](#) on page 83

### Assignment Statements

There are several kinds of assignment statements in Verilog-A: the procedural assignment statement, the branch contribution statement, and the indirect branch assignment statement. You use the procedural assignment statement to modify integer and real variables and you use the branch contribution and indirect branch assignment statements to modify branch values such as potential and flow.

## Procedural Assignment Statements in the Analog Block

Use the procedural assignment statement to modify integer and real variables.

```
procedural_assignment ::=
    lexpr = expression ;

lexpr ::=
    integer_identifier
    | real_identifier
    | array_element

array_element ::=
    integer_identifier [ constant_expression ]
    | real_identifier [ constant_expression ]
```

The left-hand operand of the procedural assignment must be a modifiable integer or real variable or an element of an integer or real array. The type of the left-hand operand determines the type of the assignment.

The right-hand operand can be any arbitrary scalar expression constituted from legal operands and operators.

In the following code fragment, the variable `phase` is assigned a real value. The value must be real because `phase` is defined as a real variable.

```
real phase ;
analog begin
    phase = idt( gain*V(in) ) ;
```

You can also use procedural assignment statements to modify array values. For example, if `r` is declared as

```
real r[0:3], sum ;
```

you can make assignments such as

```
r[0] = 10.1 ;
r[1] = 11.1 ;
r[2] = 12.1 ;
r[3] = 13.1 ;
sum = r[0] + r[1] + r[2] + r[3] ;
```

## Branch Contribution Statement

Use the branch contribution statement to modify signal values.

```
branch_contribution ::=
    bvalue <+ expression ;

bvalue ::=
    access_identifier ( analog_signal_list )

analog_signal_list ::=
    branch_identifier
```

## Cadence Verilog-A Language Reference

### Statements for the Analog Block

---

```
| node_or_port_identifier  
| node_or_port_identifier , node_or_port_identifier
```

`bvalue` specifies a source branch signal. `bvalue` must consist of an access function applied to a branch. *expression* can be linear, nonlinear, or dynamic.

Branch contribution statements must be placed within the analog block.

As discussed in the following list, the branch contribution statement differs in important ways from the procedural assignment statement.

- You can use the procedural assignment statement only for variables, whereas you can use the branch contribution statement only for access functions.
- Using the procedural assignment statement to assign a number to a variable overrides the number previously contained in that variable. Using the branch contribution statement, however, adds to any previous contribution. (Contributions to flow can be viewed as adding new flow sources in parallel with previous flow sources. Contributions to value can be viewed as adding new value sources in series with previous value sources.)

### Evaluation of a Branch Contribution Statement

For source branch contributions, the simulator evaluates the branch contribution statement as follows:

1. The simulator evaluates the right-hand operand.
2. The simulator adds the value of the right-hand operand to any previously retained value for the branch.
3. At the end of the evaluation of the analog block, the simulator assigns the summed value to the source branch.


For example, given a pair of nodes declared with the `electrical` discipline, the code fragment

```
V(n1, n2) <+ expr1 ;  
V(n1, n2) <+ expr2 ;
```

is equivalent to

```
V(n1, n2) <+ expr1 + expr2 ;
```

## Creating a Switch Branch



When you contribute a flow to a branch that already has a value retained for potential, the simulator discards the value for potential and converts the branch to a flow source. Conversely, when you contribute a potential to a branch that already has a value retained for flow, the simulator discards the value for flow and converts the branch to a potential source. Branches converted from flow sources to potential sources, and vice versa, are known as *switch branches*. For additional information, see [“Switch Branches”](#) on page 277.

## Indirect Branch Assignment Statement

Use the indirect branch assignment statement when it is difficult to separate the target from the equation.

```
indirect_branch_assignment ::=
    target : equation ;

target ::=
    bvalue

equation ::=
    nexpr == expression

nexpr ::=
    bvalue
    | ddt ( bvalue )
    | idt ( bvalue )
    | idtmod ( bvalue )
```

An indirect branch assignment has this format:

```
V(out) : V(in) == 0 ;
```

Read this as “find  $V(\text{out})$  such that  $V(\text{in})$  is zero.” This example says that `out` should be driven with a voltage source and the voltage should be such that the given equation is satisfied. Any branches referenced in the equation are only probed and not driven, so in this example,  $V(\text{in})$  acts as a voltage probe.

Indirect branch assignments can be used only within the analog block.

The next example models an ideal operational amplifier with infinite gain. The indirect assignment statement says “find  $V(\text{out})$  such that  $V(\text{pin}, \text{nin})$  is zero.”

```
module opamp (out, pin, nin) ;
output out ;
input pin, nin ;
voltage out, pin, nin ;
analog
```

```
V(out) : V(pin, nin) == 0 ; // Indirect assignment
endmodule
```

Indirect assignments are incompatible with assignments made with the branch contribution statement. If you indirectly assign a value to a branch, you cannot then contribute to the branch by using the branch contribution statement.

## Sequential Block Statement

Use a sequential block when you want to group two or more statements together so that they act like a single statement.

```
seq_block ::=
    begin [ : block_identifier { block_item_declaration } ]
        { statement }
    end
block_item_declaration ::=
    parameter_declaration
    integer_declaration
    | real_declaration
```

For information on `statement`, see [“Defining Module Analog Behavior”](#) on page 37.

The statements included in a sequential block run sequentially.

If you add a block identifier, you can also declare local variables for use within the block. All the local variables you declare are static. In other words, a unique location exists for each local variable, and entering or leaving the block does not affect the value of a local variable.

The following code fragment uses two named blocks, declaring a local variable in each of them. Although the variables have the same name, the simulator handles them separately because each variable is local to its own block.

```
integer j ;
...
for ( j = 0 ; j < 10 ; j=j+1 ) begin
    if ( j%2 ) begin : odd
        integer j ; // Declares a local variable
        j = j+1 ;
        $display ( "Odd numbers counted so far = %d" , j ) ;
    end else begin : even
        integer j ; // Declares a local variable
        j = j+1 ;
        $display ( "Even numbers counted so far = %d" , j ) ;
    end
end
```

Each named block defines a new scope. For additional information, see [“Scope Rules”](#) on page 47.

## Conditional Statement

Use the conditional statement to run a statement under the control of specified conditions.

```
conditional_statement ::=  
    if ( expression ) statement1  
    [ else statement2 ]
```

If *expression* evaluates to a nonzero number (true), the simulator executes *statement1*. If *expression* evaluates to zero (false) and the *else* statement is present, the simulator skips *statement1* and executes *statement2*.

If *expression* consists entirely of genvar expressions, literal numerical constants, parameters, or the analysis function, *statement1* and *statement2* can include analog operators.

The simulator always matches an *else* statement with the closest previous *if* that lacks an *else*. In the following code fragment, for example, the first *else* goes with the inner *if*, as shown by the indentation.

```
if (index > 0)  
    if (i > j) // The next else belongs to this if  
        result = i ;  
    else // This else belongs to the previous if  
        result = j ;  
else $strobe ("Index < 0"); // This else belongs to the first if
```

The following code fragment illustrates a particularly useful form of the *if-else* construct.

```
if ((value > 0)&&(value <= 1)) $strobe("Category A");  
else if ((value > 1)&&(value <= 2)) $strobe("Category B");  
else if ((value > 2)&&(value <= 3)) $strobe("Category C");  
else if ((value > 3)&&(value <= 4)) $strobe("Category D");  
else $strobe("Illegal value");
```

The simulator evaluates the expressions in order. If any one of them is true, the simulator runs the associated statement and ends the whole chain. The last *else* statement handles the default case, running if none of the other expressions is true.

## Case Statement

Use the *case* construct to control which one of a series of statements runs.

```
case_statement ::=  
    case ( expression ) case_item { case_item } endcase  
case_item ::=  
    test_expression { , test_expression } : statement  
    | default [ : ] statement
```



The default statement is optional. Using more than one default statement in a case construct is illegal.

The simulator evaluates each *test\_expression* in turn and compares it with *expression*. If there is a match, the statement associated with the matching *test\_expression* runs. If none of the expressions in *test\_expression* matches *expression* and if you coded a default *case\_item*, the default statement runs. If all comparisons fail and you did not code a default *case\_item*, none of the associated statements runs.

If *expression* and *test\_expression* are genvar expressions, parameters, or the analysis function, *statement* can include analog operators; otherwise, *statement* cannot include analog operators.

The following code fragment determines what range *value* is in. For example, if *value* is 1.5 the first comparison fails. The second *test\_expression* evaluates to 1 (true), which matches the case expression, so the `$strobe("Category B")` statement runs.

```
real value ;
...
    case (1)
        ((value > 0)&&(value <= 1)) : $strobe("Category A");
        ((value > 1)&&(value <= 2)) : $strobe("Category B");
        ((value > 2)&&(value <= 3)) : $strobe("Category C");
        ((value > 3)&&(value <= 4)) : $strobe("Category D");
        value <= 0 , value >= 4 : $strobe("Out of range");
        default $strobe("Error. Should never get here.");
    endcase
```

## Repeat Statement

Use the `repeat` statement when you want a statement to run a fixed number of times.

```
repeat_statement ::=
    repeat ( constant_expression ) statement
```

*statement* must not include any analog operators. For additional information, see [“Analog Operators”](#) on page 143.

The following example code repeats the loop exactly 10 times while summing the first 10 digits.

```
integer i, total ;
...
    i = 0 ;
    total = 0 ;
    repeat (10) begin
        i = i + 1 ;
        total = total + i ;
    end
```

## While Statement

Use the `while` statement when you want to be able to leave a loop when an expression is no longer valid.

```
while_statement ::=
    while ( expression ) statement
```

The `while` loop evaluates *expression* at each entry into the loop. If *expression* is nonzero (true), *statement* runs. If *expression* starts out as zero (false), *statement* never runs.

*statement* must not include any analog operators. For additional information, see “[Analog Operators](#)” on page 143.

The following code fragment counts the number of random numbers generated before `rand` becomes zero.

```
integer rand, count ;
...
    rand = abs($random % 10) ;
    count = 0 ;
    while (rand) begin
        count = count + 1 ;
        rand = abs($random % 10) ;
    end ;
    $strobe ("Count is %d", count) ;
```

## For Statement

Use the `for` statement when you want a statement to run a fixed number of times.

```
for_statement ::=
    for ( initial_assignment ; expression ;
        step_assignment ) statement
```

If *initial\_assignment*, *expression*, and *step\_assignment* are genvar expressions, the statement can include analog operators; otherwise, the *statement* must not include any analog operators. For additional information, see “[Analog Operators](#)” on page 143.

Use *initial\_assignment* to initialize an integer loop control variable that controls the number of times the loop executes. The simulator evaluates *expression* at each entry into the loop. If *expression* evaluates to zero, the loop terminates. If *expression* evaluates to a nonzero value, the simulator first runs *statement* and then runs *step\_assignment*. *step\_assignment* is usually defined so that it modifies the loop control variable before the simulator evaluates *expression* again.

For example, to sum the first 10 even numbers, the `repeat` loop given earlier could be rewritten as a `for` loop.

```
integer j, total ;
...
    total = 0 ;
    for ( j = 2; j < 22; j = j + 2 )
        total = total + j ;
```

## Generate Statement

**Note:** The `generate` statement is obsolete. To comply with current practice, use the `genvar` statement instead.

The `generate` statement is a looping construct that is unrolled at compile time. Use the `generate` statement to simplify your code or when you have a looping construct that contains analog operators. The `generate` statement can be used only within the analog block. The `generate` statement is supported only for backward compatibility.

```
generate_statement ::=
    generate index_identifier ( start_expr ,
        end_expr [ , incr_expr ] ) statement

start_expr ::=
    constant_expression

end_expr ::=
    constant_expression

incr_expr ::=
    constant_expression
```

*index\_identifier* is an identifier used in *statement*. When *statement* is unrolled, each occurrence of *index\_identifier* found in *statement* is replaced by a constant. You must be certain that nothing inside *statement* modifies the index.

In the first unrolled instance of *statement*, the compiler replaces each occurrence of *index\_identifier* by the value *start\_expr*. In the second instance, the compiler replaces each *index\_identifier* by the value *start\_expr* plus *incr\_expr*. In the third instance, the compiler replaces each *index\_identifier* by the value *start\_expr* plus twice the *incr\_expr*. This process continues until the replacement value is greater than the value of *end\_expr*.

If you do not specify *incr\_expr*, it takes the value +1 if *end\_expr* is greater than *start\_expr*. If *end\_expr* is less than *start\_expr*, *incr\_expr* takes the value -1 by default.

## Cadence Verilog-A Language Reference

### Statements for the Analog Block

---

The values of the `start_expr`, `end_expr`, and `incr_expr` determine how the `generate` statement behaves.

If	And	Then the generate statement
<code>start_expr &gt; end_expr</code>	<code>incr_expr &gt; 0</code>	does not execute
<code>start_expr &lt; end_expr</code>	<code>incr_expr &lt; 0</code>	does not execute
<code>start_expr = end_expr</code>		executes once

As an example of using the `generate` statement, consider the following module, which implements an analog-to-digital converter.

```
`define BITS 4
module adc (in, out) ;
input in ;
output [0: `BITS - 1] out ;
electrical in ;
electrical [0: `BITS - 1] out ;
parameter fullscale = 1.0, tdelay = 0.0, trantime = 10n ;
real samp, half ;

analog begin
    half = fullscale/2.0 ;
    samp = V(in) ;
    generate i ( `BITS - 1,0) begin        // default increment = -1
        V(out[i]) <+ transition(samp > half, tdelay, trantime);
        if (samp > half) samp = samp - half ;
        samp = 2.0 * samp ;
    end
end
endmodule
```

Module `adc` is equivalent to the following module coded without using the `generate` statement.

```
`define BITS 4
module adc_unrolled (in, out) ;
input in ;
output [0: `BITS - 1] out ;
electrical in;
electrical [0: `BITS - 1] out ;
parameter fullscale = 1.0, tdelay = 0.0, trantime = 10n ;
real samp, half ;

analog begin
    half = fullscale/2.0 ;
    samp = V(in) ;
    V(out[3]) <+ transition(samp > half, tdelay, trantime);
    if (samp > half) samp = samp - half ;
    samp = 2.0 * samp ;
    V(out[2]) <+ transition(samp > half, tdelay, trantime);
    if (samp > half) samp = samp - half ;
    samp = 2.0 * samp ;
```

## Cadence Verilog-A Language Reference

### Statements for the Analog Block

---

```
V(out[1]) <+ transition(samp > half, tdelay, trantime);  
if (samp > half) samp = samp - half ;  
samp = 2.0 * samp ;  
V(out[0]) <+ transition(samp > half, tdelay, trantime);  
if (samp > half) samp = samp - half ;  
samp = 2.0 * samp ;  
end  
endmodule
```

**Note:** Because the `generate` statement is unrolled at compile time, you cannot use the Verilog-A debugging tool to examine the value of *index\_identifier* or to evaluate expressions that contain *index\_identifier*. For example, if *index\_identifier* is `i`, you cannot use a debugging command like `print i` nor can you use a command like `print{a[i]}`.

## **Cadence Verilog-A Language Reference**

### Statements for the Analog Block

---

---

## Operators for Analog Blocks

---

This chapter describes the operators that you can use in analog blocks and explains how to use them to form expressions. For basic definitions, see

- [Unary Operators](#) on page 89
- [Binary Operators](#) on page 90
- [Bitwise Operators](#) on page 93
- [Ternary Operator](#) on page 94

For information about precedence and short-circuiting, see

- [Operator Precedence](#) on page 95
- [Expression Short-Circuiting](#) on page 95

For information about string operators and functions, see

- [String Operators and Functions](#) on page 95

## Overview of Operators

An *expression* is a construct that combines operands with operators to produce a result that is a function of the values of the operands and the semantic meaning of the operators. Any legal operand is also an expression. You can use an expression anywhere Verilog-A requires a value.

A *constant expression* is an expression whose operands are constant numbers and previously defined parameters and whose operators all come from among the unary, binary, and ternary operators described in this chapter.

The operators listed below, with the single exception of the conditional operator, associate from left to right. That means that when operators have the same precedence, the one farthest to the left is evaluated first. In this example

`A + B - C`

the simulator does the addition before it does the subtraction.

When operators have different precedence, the operator with the highest precedence (the smallest precedence number) is evaluated first. In this example

`A + B / C`

the division (which has a precedence of 2) is evaluated before the addition (which has a precedence of 3). For information on precedence, see [“Operator Precedence”](#) on page 95.

You can change the order of evaluation with parentheses. If you code

`(A + B) / C`

the addition is evaluated before the division.

The operators divide into three groups, according to the number of operands the operator requires. The groups are the unary operators, the binary operators, and the ternary operator.



## Unary Operators

The unary operators each require a single operand. The unary operators have the highest precedence of all the operators discussed in this chapter.

### Unary Operators

Operator	Precedence	Definition	Type of Operands Allowed	Example or Further Information
+	1	Unary plus	Integer, real	<code>I = +13; // I = 13</code> <code>I = +(-13); // I = -13</code>
-	1	Unary minus	Integer, real	<code>R = -13.1; // R = -13.1</code> <code>I = -(4-5); // I = 1</code>
!	1	Logical negation	Integer, real	<code>I = !(1==1); // I = 0</code> <code>I = !(1==2); // I = 1</code> <code>I = !13.2; // I = 0</code> /*Result is zero for a non-zero operand*/
~	1	Bitwise unary negation	Integer	See the <a href="#">Bitwise Unary Negation Operator</a> figure on page 94.
&	1	Unary reduction AND	integer	See “ <a href="#">Unary Reduction Operators.</a> ”
~&	1	Unary reduction NAND	integer	See “ <a href="#">Unary Reduction Operators.</a> ”
	1	Unary reduction OR	integer	See “ <a href="#">Unary Reduction Operators.</a> ”
~	1	Unary reduction NOR	integer	See “ <a href="#">Unary Reduction Operators.</a> ”
^	1	Unary reduction exclusive OR	integer	See “ <a href="#">Unary Reduction Operators.</a> ”
^~ or ~^	1	Unary reduction exclusive NOR	integer	See “ <a href="#">Unary Reduction Operators.</a> ”

## Unary Reduction Operators

The unary reduction operators perform bitwise operations on single operands and produce a single bit result. The reduction `AND`, reduction `OR`, and reduction `XOR` operators first apply the following logic tables between the first and second bits of the operand to calculate a result.

## Cadence Verilog-A Language Reference

### Operators for Analog Blocks

---

Then for the second and subsequent steps, these operators apply the same logic table to the previous result and the next bit of the operand, continuing until there is a single bit result.

The reduction `NAND`, reduction `NOR`, and reduction `XNOR` operators are calculated in the same way, except that the result is inverted.

#### Unary Reduction AND Operator

<b>&amp;</b>	<b>0</b>	<b>1</b>
<b>0</b>	0	0
<b>1</b>	0	1

#### Unary Reduction OR Operator

<b> </b>	<b>0</b>	<b>1</b>
<b>0</b>	0	1
<b>1</b>	1	1

#### Unary Reduction Exclusive OR Operator

<b>^</b>	<b>0</b>	<b>1</b>
<b>0</b>	0	1
<b>1</b>	1	0

## Binary Operators

The binary operators each require two operands.

#### Binary Operators

---

<b>Operator</b>	<b>Precedence</b>	<b>Definition</b>	<b>Type of Operands Allowed</b>	<b>Example or Further Information</b>
<code>+</code>	3	$a$ plus $b$	Integer, real	<code>R = 10.0 + 3.1; // R = 13.1</code>

# Cadence Verilog-A Language Reference

## Operators for Analog Blocks

### Binary Operators, *continued*

Operator	Precedence	Definition	Type of Operands Allowed	Example or Further Information
-	3	$a$ minus $b$	Integer, real	<code>I = 10 - 13; // I = -3</code>
*	2	$a$ multiplied by $b$	Integer, real	<code>R = 2.2 * 2.0; // R = 4.4</code>
/	2	$a$ divided by $b$	Integer, real	<code>I = 9 / 4; // I = 2</code> <code>R = 9.0 / 4; // R = 2.25</code>
%	2	$a$ modulo $b$	Integer, real	<code>I = 10 % 5; // I = 0</code> <code>I = -12 % 5; // I = -2</code> <code>R = 10 % 3.75; // R = 2.5</code> /*The result takes sign of the first operand.*/
<	5	$a$ less than $b$ ; evaluates to 0 or 1	Integer, real	<code>I = 5 &lt; 7; // I = 1</code> <code>I = 7 &lt; 5; // I = 0</code>
>	5	$a$ greater than $b$ ; evaluates to 0 or 1	Integer, real	<code>I = 5 &gt; 7; // I = 0</code> <code>I = 7 &gt; 5; // I = 1</code>
<=	5	$a$ less than or equal to $b$ ; evaluates to 0 or 1	Integer, real	<code>I = 5.0 &lt;= 7.5; // I = 1</code> <code>I = 5.0 &lt;= 5.0; // I = 1</code> <code>I = 5 &lt;= 4; // I = 0</code>
>=	5	$a$ greater than or equal to $b$ ; evaluates to 0 or 1	Integer, real	<code>I = 5.0 &gt;= 7; // I = 0</code> <code>I = 5.0 &gt;= 5; // I = 1</code> <code>I = 5.0 &gt;= 4.8; // I = 1</code>
==	6	$a$ equal to $b$ ; evaluates to 0, 1, or x (if any bit of $a$ or $b$ is x or z).	Integer, real	<code>I = 5.2 == 5.2; // I = 1</code> <code>I = 5.2 == 5.0; // I = 0</code> <code>I = 1 == 1'bx; // I = x</code>
!=	6	$a$ not equal to $b$ ; evaluates to 0, 1, or x (if any bit of $a$ or $b$ is x or z).	Integer, real	<code>I = 5.2 != 5.2; // I = 0</code> <code>I = 5.2 != 5.0; // I = 1</code>

## Cadence Verilog-A Language Reference

### Operators for Analog Blocks

#### Binary Operators, *continued*

Operator	Precedence	Definition	Type of Operands Allowed	Example or Further Information
&&	10	Logical AND; evaluates to 0 or 1	Integer, real	<pre>I = (1==1)&amp;&amp;(2==2); // I = 1 I = (1==2)&amp;&amp;(2==2); // I = 0 I = -13 &amp;&amp; 1;       // I = 1</pre>
	11	Logical OR; evaluates to 0 or 1	Integer, real	<pre>I = (1==2)   (2==2); // I = 1 I = (1==2)   (2==3); // I = 0 I = 13    0;         // I = 1</pre>
&	7	Bitwise binary AND	Integer	See the <a href="#">Bitwise Binary AND Operator</a> figure on page 93.
	9	Bitwise binary OR	Integer	See the <a href="#">Bitwise Binary OR Operator</a> figure on page 93.
^	8	Bitwise binary exclusive OR	Integer	See the <a href="#">Bitwise Binary Exclusive OR Operator</a> figure on page 93.
^~	8	Bitwise binary exclusive NOR (Same as ~^)	Integer	See the <a href="#">Bitwise Binary Exclusive NOR Operator</a> figure on page 93.
~^	8	Bitwise binary exclusive NOR (Same as ^~)	Integer	See the <a href="#">Bitwise Binary Exclusive NOR Operator</a> figure on page 93.
<<	4	<i>a</i> shifted <i>b</i> bits left	Integer	<pre>I = 1 &lt;&lt; 2; // I = 4 I = 2 &lt;&lt; 2; // I = 8 I = 4 &lt;&lt; 2; // I = 16</pre>
>>	4	<i>a</i> shifted <i>b</i> bits right	Integer	<pre>I = 4 &gt;&gt; 2; // I = 1 I = 2 &gt;&gt; 2; // I = 0</pre>
or	11	Event OR	Event expression	@(initial_step or cross(V(vin)-1))

## Bitwise Operators

The bitwise operators evaluate to integer values. Each operator combines a bit in one operand with the corresponding bit in the other operand to calculate a result according to these logic tables.

### Bitwise Binary AND Operator

<b>&amp;</b>	<b>0</b>	<b>1</b>
<b>0</b>	0	0
<b>1</b>	0	1

### Bitwise Binary OR Operator

<b> </b>	<b>0</b>	<b>1</b>
<b>0</b>	0	1
<b>1</b>	1	1

### Bitwise Binary Exclusive OR Operator

<b>^</b>	<b>0</b>	<b>1</b>
<b>0</b>	0	1
<b>1</b>	1	0

### Bitwise Binary Exclusive NOR Operator

<b>^~ or ~^</b>	<b>0</b>	<b>1</b>
<b>0</b>	1	0
<b>1</b>	0	1

## Cadence Verilog-A Language Reference

### Operators for Analog Blocks

---

#### Bitwise Unary Negation Operator

~	
0	1
1	0

## Ternary Operator

There is only one ternary operator, the conditional operator. The conditional operator has the lowest precedence of all the operators listed in this chapter.

#### Conditional Operator

---

Operator	Precedence	Definition	Type of Operands Allowed	Example or Further Information
?:	12	$exp ? t\_exp : f\_exp$	Valid expressions	<pre>I= 2==3 ? 1:0;    // I = 0 R= 1==1 ? 1.0:0.0; // R=1.0</pre>

A complete conditional operator expression looks like this:

*conditional\_expr ? true\_expr : false\_expr*

If *conditional\_expr* is true, the conditional operator evaluates to *true\_expr*, otherwise to *false\_expr*.

The conditional operator is right associative.

This operator performs the same function as the `if-else` construct. For example, the contribution statement

```
V(out) <+ V(in) > 2.5 ? 0.0 : 5.0 ;
```

is equivalent to

```
If (V(in) > 2.5)
    V(out) <+ 0.0 ;
else
    V(out) <+ 5.0 ;
```

## Operator Precedence

The following table summarizes the precedence information for the unary, binary, and ternary operators. Operators at the top of the table have higher precedence than operators lower in the table.

Precedence	Operators	
1	+ - ! ~ (unary)	Highest precedence
2	* / %	
3	+ - (binary)	
4	<< >>	
5	< <= > >=	
6	== !=	
7	&	
8	^ ~^ ^~	
9		
10	&&	
11		
12	?: (conditional operator)	Lowest precedence



## Expression Short-Circuiting

Sometimes the simulator can determine the value of an expression containing logical AND ( && ), logical OR ( || ), or bitwise AND ( & ) without evaluating the entire expression. By taking advantage of such expressions, the simulator operates more efficiently.

## String Operators and Functions

The string operators and functions are for manipulating and comparing strings. The operands can be string parameters provided that the string parameters are not changed. String operators and functions are supported only in Verilog-A modules that are brought into the design by using the `ahdl_include` statement.

## Cadence Verilog-A Language Reference

### Operators for Analog Blocks

If you do not need functionality equivalent to SpectreHDL, Cadence recommends using the Verilog-A string functions listed in [Table 6-1](#) on page 96. These functions are adapted from SystemVerilog and though they are non-standard now, they are expected to become part of the Verilog-A standard in the future.

**Table 6-1 Verilog-A String Functions**

Function	Description	Detailed Information
<code>\$sscanf(string_format {,arg})</code>	Reads bytes from a string, interprets the bytes according to the specified <code>string_format</code> format and stores the result in arguments.	<a href="#">“\$sscanf”</a> on page 100.
<code>== != &lt; &gt; &gt;= &lt;=</code>	Compare two strings alphabetically and lexicographically.	<a href="#">“Comparison Operators”</a> on page 99.
<code>des_str = src_str</code>	Copies <code>src_str</code> to <code>des_str</code> .	<a href="#">“String Copy Operator”</a> on page 99.
<code>{str_des, str_src}</code>	Appends (concatenates) <code>src_str</code> to <code>des_str</code> .	<a href="#">“Concatenation Operator”</a> on page 99.
<code>int_as_str.atoi()</code>	Converts a string, <code>int_as_str</code> , to an integer.	<a href="#">“atoi”</a> on page 100.
<code>real_as_str.atoreal()</code>	Converts a string, <code>real_as_str</code> , to a real.	<a href="#">“atoreal”</a> on page 101.
<code>str.getc()</code>	Returns the ASCII code of the first character of <code>string1</code> .	<a href="#">“getc”</a> on page 101.
<code>str.len()</code>	Returns the number of characters in <code>str</code> .	<a href="#">“len”</a> on page 101.
<code>str.substr(start_pos, end_pos)</code>	Returns the substring of <code>str</code> between <code>start_pos</code> and <code>end_pos</code> , inclusive.	<a href="#">“substr”</a> on page 104.

The SpectreHDL equivalent string functions listed in [Table 6-2](#) on page 97 are provided for those who need functionality equivalent to what was available with the SpectreHDL language. These SpectreHDL equivalent functions are temporary non-standard Cadence extensions



## Cadence Verilog-A Language Reference

### Operators for Analog Blocks

---

designed to facilitate the translation of SpectreHDL modules. Support for these functions might be withdrawn in a future release.

The SpectreHDL equivalent string functions must be brought into the design by including the `shdl_strings.vams` file in the module where the functions are used. The ``include` statement must be placed after the module declaration but before the `endmodule` statement, just before the `analog` statement.

If you would like to examine the code that implements these functions, the file is provided at `your_mmsim_install_dir/tools/spectre/etc/ahdl/shdl_strings.vams`

**Table 6-2 SpectreHDL Equivalent String Functions**

Function	Description	Detailed Information
<code>shdl_strchr(input_str, character)</code>	Returns the first position where <i>character</i> is found in <i>input_str</i> .	<a href="#">“shdl_strchr” on page 102.</a>
<code>shdl_strcspn(input_str, span_set)</code>	Returns the number of continuous characters from the start of <i>input_str</i> that are not in <i>span_set</i> .	<a href="#">“shdl_strcspn” on page 102.</a>
<code>shdl_strrchr(input_str, character)</code>	Returns the last position where <i>character</i> is found in <i>input_str</i> .	<a href="#">“shdl_strrchr” on page 103.</a>
<code>shdl_strspn(input_str, span_set)</code>	Returns the number of continuous characters from the start of <i>input_str</i> that are in <i>span_set</i> .	<a href="#">“shdl_strspn” on page 103.</a>
<code>shdl_strstr(input_str, sub_str)</code>	Returns the first position where <i>sub_str</i> is found in <i>input_str</i> .	<a href="#">“shdl_strstr” on page 104.</a>

## Mapping SpectreHDL String Functions to Verilog-A Functions

The following table provides an overview of the Verilog-A string functions that provide the functionality formerly provided in SpectreHDL.

**Table 6-3 Mapping SpectreHDL to Verilog-A String Functions**

<b>SpectreHDL</b>	<b>Verilog-A</b>	<b>Detailed Information</b>
\$ascii	getc	<a href="#">“getc”</a> on page 101.
\$str	\$sscanf	<a href="#">“\$sscanf”</a> on page 100.
\$strcat	concatenation operator	<a href="#">“Concatenation Operator”</a> on page 99.
\$strchr	shdl_strchr	<a href="#">“shdl_strchr”</a> on page 102.
\$strcmp	comparison operators	<a href="#">“Comparison Operators”</a> on page 99.
\$strcpy	string copy operator	<a href="#">“String Copy Operator”</a> on page 99.
\$strcspn	shdl_strcspn	<a href="#">“shdl_strcspn”</a> on page 102.
\$strlen	len	<a href="#">“len”</a> on page 101.
\$strrchr	shdl_strrchr	<a href="#">“shdl_strrchr”</a> on page 103.
\$strspn	shdl_strspn	<a href="#">“shdl_strspn”</a> on page 103.
\$strstr	shdl_strstr	<a href="#">“shdl_strstr”</a> on page 104.
\$strtoint	atoi	<a href="#">“atoi”</a> on page 100.
\$strtoreal	atoreal	<a href="#">“atoreal”</a> on page 101.
\$substr	substr	<a href="#">“substr”</a> on page 104.

## String Operator Details

This section gives information about the string comparison, copy, and concatenation operators.

## Comparison Operators

Use the string comparison operators to compare two strings alphabetically and lexicographically. The lexicographic order used is that of the ASCII code.

```
comparison_operator ::=  
    str1 == str2  
    | str1 != str2  
    | str1 < str2  
    | str1 <= str2  
    | str1 > str2  
    | str1 >= str2
```

*str1* and *str2* can both be of type string or one of them can be a string literal.

The equality comparison (==) returns 1 if the two string are equal and returns 0 otherwise. The inequality comparison (!=) returns 1 if the two strings are not equal and returns 0 if they are equal. The other comparison operators return 1 if the condition is true using the lexicographical ordering of the two strings.

For example,

```
inputStr = "YourFriend";  
check = (inputStr == "YourFriend" ); // Returns 1
```

## String Copy Operator

Use the string copy operator to copy a string.

```
string_copy_operator ::=  
    str2 = str1
```

For example,

```
des_str = src_str;
```

copies *src\_str* to *des\_str*.

## Concatenation Operator

Use the concatenation operator to append (concatenate) a string to another string.

```
string_concatenation_operator ::=  
    { str1, str2 }
```

For example,

```
str_des={str_des, str_src};
```

appends (concatenates) *str\_src* to *str\_des*.

## String Function Details

This section gives information about the string functions.

For functions that refer to positions within the string, note that the first character in a string is considered to be at position 0, the second character in a string is at position 1, and so on.

### **\$sscanf**

Use the `$sscanf` function to create a string from mixed-type arguments. It works like `$strobe()`. See “[\\$strobe](#)” on page 166 for more information.

```
$sscanf_function ::=  
    $sscanf(string_format{,arg})
```

For example, the following function creates a string from an integer, a string, and a real variable.

```
integer varInt;  
real varReal;  
string varString;  
string retString;  
@(initial_step)  
    begin  
        varInt = 123;  
        varString = "456";  
        varReal = 7.890121212e2;  
        retString=$sscanf("Use Integer %d, string %s and real %.1f to create a  
string %d%s%.1f !", varInt, varString, varReal, varInt, varString, varReal);  
    end
```

For this example, `retString` receives the value "Use Integer 123, string 456 and real 789.0 to create a string 123456789.0!"

### **atoi**

Use the `atoi` function to convert a string to an integer.

```
atoi_function ::=  
    int_as_str.atoi()
```

For example,

```
inputstr1 = "456";  
str1 = inputstr1.atoi(); // Returns 456  
inputstr2 = "99.9";  
str2 = inputstr2.atoi(); // Returns 99  
inputstr3 = "cj0";  
str3 = inputstr3.atoi(); // Causes an error to be reported
```

## **atoreal**

Use the `atoreal` function to convert a string to a real.

```
atoreal_function ::=  
    real_as_str.atoreal()
```

For example:

```
inputstr1 = "3.142";  
r1 = inputstr1.atoreal(); // Returns 3.142  
inputstr2 = "66e6";  
r2 = inputstr2.atoreal(); // Returns 6.6e7  
inputstr3 = "Gm";  
r3 = inputstr3.atoreal(); // Causes an error to be reported
```

## **getc**

Use the `getc` function to obtain the ASCII code of the first character of a string.

```
getc_function ::=  
    character.getc()
```

Note that the data type of *character* is string. If *character* is an empty string or is undefined, an error is reported. If *character* is a multiple character string, a warning is issued.

For example:

```
inputstr1 = " ";  
code1 = inputstr1.getc(); // Returns 32  
inputstr2 = "6";  
code2 = inputstr2.getc(); // Returns 54  
inputstr3 = "67";  
code3 = inputstr3.getc(); // Returns 54 and causes  
    //a warning about using a multiple  
    //character string as an argument  
inputstr4 = "G";  
code4 = inputstr4.getc(); // Returns 71  
inputstr5 = "";  
code5 = inputstr5.getc(); // Causes an error to be reported
```

## **len**

Use the `len` function to determine the number of characters in a string.

```
len_function ::=  
    str.len()
```

For example,

```
inputstr1 = "a short string";  
len1 = inputstr1.len(); // returns 14
```

## **shdl\_strchr**

Use the `shdl_strchr` function to find where the first instance of a character occurs in a string.

```
shdl_strchr_function ::=
    shdl_strchr (input_string, character)
```

The data type of *character* is string. `shdl_strchr` returns the first position in *input\_string* where *character* is found. The function returns -1 if *character* is not found in *input\_string*. An error is reported if either *input\_string* or *character* is undefined. If *character* is an empty string, an error is also reported. If *character* is a multiple-character string, a warning is issued.

To use this function, you must use a ``include` statement to include the `shdl_strings.vams` file in the module that uses the function, just before the `analog` statement.

For example

```
`include "shdl_strings.vams"
...
pos1 = shdl_strchr("ABCDEFGHI", "E"); // Returns 4
pos2 = shdl_strchr("abcdefghi", "C"); // Returns -1
```

## **shdl\_strcspn**

Use the `shdl_strcspn` function to count sequences of characters in *input\_string* that are not in a particular set of characters.

```
shdl_strcspn_function ::=
    shdl_strcspn(input_string, span_set)
```

The function returns the number of continuous characters from the start of *input\_string* that are not in *span\_set*. If either *input\_string* or *span\_set* is an undefined string, an error is reported. An error is also reported if *span\_set* is an empty string.

To use this function, you must use a ``include` statement to include the `shdl_strings.vams` file in the module that uses the function, just before the `analog` statement.

For example:

```
`include "shdl_strings.vams"
...
num1 = shdl_strcspn("cjc=1234.0", "0123456789"); // returns 4
num2 = shdl_strcspn("format=nutmeg", "="); // returns 6
```

## **shdl\_strchr**

Use the `shdl_strchr` function to find where the last instance of a character occurs in a string.

```
shdl_strchr_function ::=
    shdl_strchr (input_string, character)
```

The data type of *character* is string. `shdl_strchr` returns the last position in *input\_string* where *character* is found. The function returns -1 if *character* is not found in *input\_string*. An error is reported if either *input\_string* or *character* is undefined. If *character* is an empty string, an error is also reported. If *character* is a multiple character string, a warning is issued.

To use this function, you must use a ``include` statement to include the `shdl_strings.vams` file in the module that uses the function, just before the `analog` statement.

For example:

```
`include "shdl_strings.vams"
...
num1 = shdl_strchr("first x, last x", "x"); // Returns 14
num2 = shdl_strchr("abcdefghi", "l"); // Returns -1
```

## **shdl\_strspn**

Use the `shdl_strspn` function to count sequences of a set of characters in a particular string.

```
shdl_strspn_function ::=
    shdl_strspn(input_string, span_set)
```

`shdl_strspn` returns the number of continuous characters from the start of *input\_string* that are in *span\_set*. If either *input\_string* or *span\_set* is an undefined string, an error is reported. An error is also reported if *span\_set* is an empty string.

To use this function, you must use a ``include` statement to include the `shdl_strings.vams` file in the module that uses the function, just before the `analog` statement.

For example:

```
`include "shdl_strings.vams"
...
num1 = shdl_strspn("1234.0", "0123456789"); // Returns 4
num2 = shdl_strspn("/*comment", "/*"); // Returns 2
```

## **shdl\_strstr**

Use the `shdl_strstr` function to find where the first instance of *substring* occurs in *input\_string*.

```
shdl_strstr_function ::=  
    shdl_strstr (input_string,substring)
```

The function returns in *input\_string* the first position where *substring* is found. `shdl_strstr` returns -1 if *substring* is not found in *input\_string*.

To use this function, you must use a ``include` statement to include the `shdl_strings.vams` file in the module that uses the function, just before the `analog` statement.

For example:

```
`include "shdl_strings.vams"  
...  
pos1 = shdl_strstr("a little string in a big string", "little");//Returns 2  
pos2 = shdl_strstr("filename = myfile","herfile");// Returns -1
```

## **substr**

Use the `substr` function to extract a portion of a string.

```
substr_function ::=  
    str.substr(start_pos, end_pos)
```

This function returns the substring of *str* starting at position *start\_pos* of *str* up to and including *end\_pos*. Notice that this is different from the SpectreHDL `$substr`, which does not include the *end\_pos* character in the substring. For example:

```
string1 = "Vds =";  
substr1 = string1.substr(0,2); // returns "Vds"  
string2 = "File=myfile"  
substr2 = string2.substr(5,string2.len()-1);//returns "myfile"
```



---

## Built-In Mathematical Functions

---

This chapter describes the mathematical functions provided by the Cadence® Verilog®-A language. These functions include

- [Standard Mathematical Functions](#) on page 106
- [Trigonometric and Hyperbolic Functions](#) on page 106
- [Controlling How Math Domain Errors Are Handled](#) on page 107

Because the simulator uses differentiation to evaluate expressions, Cadence recommends that you use only mathematical expressions that are continuously differentiable. To prevent run-time domain errors, make sure that each argument is within a function's domain.

## Standard Mathematical Functions

These are the standard mathematical functions supported by Verilog-A. The operands must be integers or real numbers.

Function	Description	Domain	Returned Value
<code>abs(x)</code>	Absolute	All $x$	Integer, if $x$ is integer; otherwise, real
<code>ceil(x)</code>	Smallest integer larger than or equal to $x$	All $x$	Integer
<code>exp(x)</code>	Exponential. See also <a href="#">“Limited Exponential Function”</a> on page 144.		Real
<code>floor(x)</code>	Largest integer less than or equal to $x$	All $x$	Integer
<code>ln(x)</code>	Natural logarithm	$x > 0$	Real
<code>log(x)</code>	Decimal logarithm	$x > 0$	Real
<code>max(x,y)</code>	Maximum	All $x$ , all $y$	Integer, if $x$ and $y$ are integers; otherwise, real
<code>min(x,y)</code>	Minimum	All $x$ , all $y$	Integer, if $x$ and $y$ are integers; otherwise, real
<code>pow(x,y)</code>	Power of ( $x^y$ )	All $y$ , if $x > 0$ $y > 0$ , if $x = 0$ $y$ integer, if $x < 0$	Real
<code>sqrt(x)</code>	Square root	$x \geq 0$	Real

## Trigonometric and Hyperbolic Functions

These are the trigonometric and hyperbolic functions supported by Verilog-A. The operands must be integers or real numbers. The simulator converts operands to real numbers if necessary.

## Cadence Verilog-A Language Reference

### Built-In Mathematical Functions

The trigonometric and hyperbolic functions require operands specified in radians.

Function	Description	Domain
<code>sin(x)</code>	Sine	All $x$
<code>cos(x)</code>	Cosine	All $x$
<code>tan(x)</code>	Tangent	$x \neq n\left(\frac{\pi}{2}\right), n \text{ is odd}$
<code>asin(x)</code>	Arc-sine	$-1 \leq x \leq 1$
<code>acos(x)</code>	Arc-cosine	$-1 \leq x \leq 1$
<code>atan(x)</code>	Arc-tangent	All $x$
<code>atan2(x,y)</code>	Arc-tangent of $x/y$	All $x$ , all $y$
<code>hypot(x,y)</code>	$\text{Sqrt}(x^2 + y^2)$	All $x$ , all $y$
<code>sinh(x)</code>	Hyperbolic sine	All $x$
<code>cosh(x)</code>	Hyperbolic cosine	All $x$
<code>tanh(x)</code>	Hyperbolic tangent	All $x$
<code>asinh(x)</code>	Arc-hyperbolic sine	All $x$
<code>acosh(x)</code>	Arc-hyperbolic cosine	$x \geq 1$
<code>atanh(x)</code>	Arc-hyperbolic tangent	$-1 \leq x \leq 1$

## Controlling How Math Domain Errors Are Handled

To control how math domain errors are handled in Verilog-A modules, you can use the options `ahdldomainerror` parameter in a Spectre control file. This parameter controls how domain (out-of-range) errors in Verilog-A math functions such as `log` or `atan` are handled and determines what kind of message is issued when a domain error is found.

The `ahdldomainerror` parameter format is

*Name* **options** `ahdldomainerror=value`

where the syntax items are defined as follows.

## Cadence Verilog-A Language Reference

### Built-In Mathematical Functions

---

<i>Name</i>	The unique name you give to the <code>options</code> statement. The Spectre simulator uses this name to identify this statement in error or annotation messages
<i>value</i>	
<code>none</code>	<p>If a domain error occurs, no message is issued. The simulation continues with the argument of the math function set to the nearest reasonable number to the invalid argument.</p> <p>For example, if the <code>`sqrt()</code> function is passed a negative value, the argument is reset to 0.0.</p>
<code>warning</code>	<p>If a domain error occurs, a warning message is issued. The simulation continues with the argument of the math function set to the nearest reasonable number to the invalid argument. This is the default.</p> <p>For example, if the <code>`sqrt()</code> function is passed a negative value, the argument is reset to 0.0.</p>
<code>error</code>	<p>If a domain error occurs, a message such as the following (which, in this example, indicates a problem with the <code>`sqrt</code> function) is issued.</p> <pre>Fatal error found by spectre during IC analysis, during transient analysis `mytran'. "acosh.va" 20: r1: negative argument passed to `sqrt()'. (value passed was -1.000000)</pre> <p>The simulation then terminates.</p>

For example, you might have the following in a Spectre control file to ensure that simulation stops when a domain error occurs.

```
myoption options ahdldomainerror=error
```

---

## Detecting and Using Analog Events

---

During a simulation, the simulator generates analog events that you can use to control the behavior of your modules. The simulator generates some of these events automatically at various stages of the simulation. The simulator generates other events in accordance with criteria that you specify. Your modules can detect either kind of event and use the occurrences to determine whether specified statements run.

This chapter discusses the following kinds of events

- [Initial\\_step Event](#) on page 111
- [Final\\_step Event](#) on page 111
- [Cross Event](#) on page 112
- [Above Event](#) on page 113
- [Timer Event](#) on page 115

## Detecting and Using Events

Use the @ operator to run a statement under the control of particular events.

```
event_control_statement ::=
    @ ( event_expr ) statement ;
event_expr ::=
    simple_event [ or event_expr ]
simple_event ::=
    initial_step_event
    | final_step_event
    | cross_event
    | timer_event
```

*statement* is the statement controlled by *event\_expr*. The *statement*:

- Cannot include expressions that use analog operators.
- Cannot be a contribution statement.

*simple\_event* is an event that you want to detect. The behavior depends on the context:

- In the analog context, when, and only when, *simple\_event* occurs, the simulator runs *statement*. Otherwise, *statement* is skipped. The kinds of simple events are described in the following sections.
- In the digital context, processing of the block is prevented until the event expression evaluates to true.

If you want to detect more than one kind of event, you can use the event *or* operator. Any one of the events joined with the event *or* operator causes the simulator to run *statement*. The following fragment, for example, sets *V(out)* to zero or one at the beginning of the analysis and at any time *V(sample)* crosses the value 2.5.

```
analog begin
    @(initial_step or cross(V(sample)-2.5, +1)) begin
        vout = (V(in) > 2.5) ;
    end
    V(out) <+ vout ;
end
```

---

For information on	See
<i>initial_step_event</i>	<a href="#">“Initial_step Event”</a> on page 111
<i>final_step_event</i>	<a href="#">“Final_step Event”</a> on page 111
<i>cross_event</i>	<a href="#">“Cross Event”</a> on page 112
<i>above_event</i>	<a href="#">“Above Event”</a> on page 113

---

For information on	See
--------------------	-----

---

timer_event	
-------------	--

---

	<a href="#">“Timer Event”</a> on page 115
--	---

---

## Initial\_step Event

The simulator generates an `initial_step` event during the solution of the first point in specified analyses, or, if no analyses are specified, during the solution of the first point of every analysis. Use the `initial_step` event to perform an action that should occur only at the beginning of an analysis.

```
initial_step_event ::=
    initial_step [ ( analysis_list ) ]
analysis_list ::=
    analysis_name { , analysis_name }
analysis_name ::=
    "analysis_identifier"
```

If the string in *analysis\_identifier* matches the analysis being run, the simulator generates an `initial_step` event during the solution of the first point of that analysis. If you do not specify *analysis\_list*, the simulator generates an `initial_step` event during the solution of the first point, or initial DC analysis, of every analysis.

## Final\_step Event

The simulator generates a `final_step` event during the solution of the last point in specified analyses, or, if no analyses are specified, during the solution of the last point of every analysis. Use the `final_step` event to perform an action that should occur only at the end of an analysis.

```
final_step_event ::=
    final_step [ ( analysis_list ) ]
analysis_list ::=
    analysis_name { , analysis_name }
analysis_name ::=
    "analysis_identifier"
```

If the string in *analysis\_identifier* matches the analysis being run, the simulator generates a `final_step` event during the solution of the last point of that analysis. If you do not specify *analysis\_list*, the simulator generates a `final_step` event during the solution of the last point of every analysis.

You might use the `final_step` event to print out the results at the end of an analysis. For example, module `bit_error_rate` measures the bit-error of a signal and prints out the

results at the end of the analysis. (This example also uses the timer event, which is discussed in “[Timer Event](#)” on page 115.)

```
module bit_error_rate (in, ref) ;
input in, ref ;
electrical in, ref ;
parameter real period=1, thresh=0.5 ;
integer bits, errors ;
analog begin
    @(initial_step) begin
        bits = 0 ;
        errors = 0 ;                                // Initialize the variables
    end
    @(timer(0, period)) begin
        if ((V(in) > thresh) != (V(ref) > thresh))
            errors = errors + 1;                    // Check for errors each period
        bits = bits + 1 ;
    end
    @(final_step)
        $strobe("Bit error rate = %f%%", 100.0 * errors/bits );
end
endmodule
```

## Cross Event

According to criteria you set, the simulator can generate a cross event when an expression crosses zero in a specified direction. Use the `cross` function to specify which crossings generate a cross event.

```
cross_function ::=
    cross (expr1 [ , direction [ , time_tol [ , expr_tol ] ] ] )
direction ::=
    +1 | 0 | -1
time_tol ::=
    expr2
expr_tol ::=
    expr3
```

*expr1* is the real expression whose zero crossing you want to detect.

*direction* is an integer expression set to indicate which zero crossings the simulator should detect.

If you want to	Then
Detect all zero crossings	Do not specify direction, or set direction equal to 0
Detect only zero crossings where the value is increasing	Set direction equal to +1



## Cadence Verilog-A Language Reference

### Detecting and Using Analog Events

---

---

#### If you want to

#### Then

Detect only zero crossings where the value is decreasing

Set `direction` equal to -1

---

`time_tol` is a constant expression with a positive value, which is the largest time interval that you consider negligible. The default value is 1.0s, which is large enough that the tolerance is almost always satisfied.

`expr_tol` is a constant expression with a positive value, which is the largest difference that you consider negligible. If you specify `expr_tol`, both it and `time_tol` must be satisfied. If you do not specify `expr_tol`, the simulator uses the default `expr_tol` value of

`1e-9 + reltol*max_value_of_the_signal`

In addition to generating a cross event, the `cross` function also controls the time steps to accurately resolve each detected crossing.

The `cross` function is subject to the restrictions listed in [“Restrictions on Using Analog Operators”](#) on page 144.

The following example illustrates how you might use the `cross` function and event. The `cross` function generates a cross event each time the sample voltage increases through the value 2.5. `expr_tol` is specified as the `abstol` associated with the potential nature of the net sample.

```
module samphold (in, out, sample) ;
  output out ;
  input in, sample ;
  electrical in, out, sample ;
  real hold ;
  analog begin
    @(cross(V(sample)-2.5, +1, 0.01n, sample.potential.abstol))
      hold = V(in) ;
    V(out) <+ transition(hold, 0, 10n) ;
  end
endmodule
```

## Above Event

According to criteria you set, the simulator can generate an above event when an expression becomes greater than or equal to zero. Use the `above` function to specify when the simulator generates an above event. An above event can be generated and detected during initialization. By contrast, a cross event can be generated and detected only after at least one transient time step is complete.

The `above` function is a Cadence language extension.

## Cadence Verilog-A Language Reference

### Detecting and Using Analog Events

---

```
above_function ::=
    above (expr1 [ , time_tol [ , expr_tol ] ] )
time_tol ::=
    expr2
expr_tol ::=
    expr3
```

*expr1* is a real expression whose value is to be compared with zero.

*time\_tol* is a constant real expression with a positive value, which is the largest time interval that you consider negligible.

*expr\_tol* is a constant real expression with a positive value, which is the largest difference that you consider negligible. If you specify *expr\_tol*, both it and *time\_tol* must be satisfied. If you do not specify *expr\_tol*, the simulator uses the value of its own *reltol* parameter.

During a transient analysis, after  $t = 0$ , the *above* function behaves the same as a *cross* function with the following specification.

```
cross(expr1 , 1 , time_tol, expr_tol )
```

During a transient analysis, the *above* function controls the time steps to accurately resolve the time when *expr1* rises to zero or above.

The *above* function is subject to the restrictions listed in [“Restrictions on Using Analog Operators”](#) on page 144.

The following example, taken from the sample library, illustrates how to use the *above* function.

```
module and_gate(vin1, vin2, vout);
input vin1, vin2;
output vout;
electrical vin1, vin2, vout;
parameter real vlogic_high = 5;
parameter real vlogic_low = 0;
parameter real vtrans = 1.4;
parameter real tdel = 2u from [0:inf);
parameter real trise = 1u from (0:inf);
parameter real tfall = 1u from (0:inf);

    real vout_val;
    integer logic1, logic2;
analog begin
    @ ( initial_step ) begin
        if (vlogic_high < vlogic_low) begin
            $display("Range specification error.  vlogic_high = (%E) less than vlogic_low = (%E).\n", vlogic_high, vlogic_low );
            $finish;
        end
        if (vtrans > vlogic_high || vtrans < vlogic_low) begin
            $display("Inconsistent $threshold specification w/logic family.\n");
        end
    end
end
```

```
        end
    end
    @ (above(V(vin1) - vtrans)) logic1 = 1;
    @ (above(vtrans - V(vin1))) logic1 = 0;
    @ (above(V(vin2) - vtrans)) logic2 = 1;
    @ (above(vtrans - V(vin2))) logic2 = 0;
    //
    // define the logic function.
    //
    vout_val = (logic1 && logic2) ? vlogic_high : vlogic_low;
    V(vout) <+ transition( vout_val, tdel, trise, tfall);
end
endmodule
```

## Timer Event

According to criteria you set, the simulator can generate a timer event at specified times during a simulation. Use the `timer` function to specify when the simulator generates a timer event.

Do not use the `timer` function inside conditional statements.

```
timer_function ::=
    timer ( start_time [ , period [ , timetol ] ] )
```

*start\_time* is a dynamic expression specifying an initial time. The simulator places a first time step at, or just beyond, the *start\_time* that you specify and generates a timer event.

*period* is a dynamic expression specifying a time interval. The simulator places time steps and generates events at each multiple of *period* after *start\_time*.

*timetol* is a constant expression specifying how close a placed time point must be to the actual time point.

The module `squarewave`, below, illustrates how you might use the timer function to generate timer events. In `squarewave`, the output voltage changes from positive to negative or from negative to positive at every time interval of `period/2`.

```
module squarewave (out)
    output out ;
    electrical out ;
    parameter period = 1.0 ;
    integer x ;
    analog begin
        @(initial_step) x = 1 ;
        @(timer(0, period/2)) x = -x ;
        V(out) <+ transition(x, 0.0, period/100.0 ) ;
    end
endmodule
```



---

## Simulator Functions

---

This chapter describes the Cadence® Verilog®-A language simulator functions. The simulator functions let you access information about a simulation and manage the simulation's current state. You can also use the simulator functions to display and record simulation results.

For information about using simulator functions, see

- [Announcing Discontinuity](#) on page 119
- [Bounding the Time Step](#) on page 121
- [Finding When a Signal Is Zero](#) on page 122
- [Querying the Simulation Environment](#) on page 123
- [Detecting Parameter Overrides](#) on page 125
- [Obtaining and Setting Signal Values](#) on page 126
- [Determining the Current Analysis Type](#) on page 128
- [Implementing Small-Signal AC Sources](#) on page 130
- [Implementing Small-Signal Noise Sources](#) on page 130
- [Generating Random Numbers](#) on page 132
- [Generating Random Numbers in Specified Distributions](#) on page 133
- [Interpolating with Table Models](#) on page 139

For information on analog operators and filters, see

- [Limited Exponential Function](#) on page 144
- [Time Derivative Operator](#) on page 144
- [Time Integral Operator](#) on page 145
- [Circular Integrator Operator](#) on page 147

- [Delay Operator](#) on page 150
- [Transition Filter](#) on page 151
- [Slew Filter](#) on page 154
- [Implementing Laplace Transform S-Domain Filters](#) on page 156
- [Implementing Z-Transform Filters](#) on page 161

For descriptions of functions used to control input and output, see

- [Displaying Results](#) on page 165
- [Working with Files](#) on page 171

For descriptions of functions used to control the simulator, see

- [Exiting to the Operating System](#) on page 176

For a description of the `$pwr` function, which is used to specify power consumption in a module, see

- [Specifying Power Consumption](#) on page 170

For information on using user-defined functions in the Verilog-A language, see

- [Declaring an Analog User-Defined Function](#) on page 177
- [Calling a User-Defined Analog Function](#) on page 179

## Announcing Discontinuity

Use the `$discontinuity` function to tell the simulator about a discontinuity in signal behavior.

```
discontinuity_function ::=  
    $discontinuity[ (constant_expression) ]
```


*constant\_expression*, which must be zero or a positive integer, is the degree of the discontinuity. For example, `$discontinuity`, which is equivalent to `$discontinuity(0)`, indicates a discontinuity in the equation, and `$discontinuity(1)` indicates a discontinuity in the slope of the equation.

You do not need to announce discontinuities created by switch branches or built-in functions such as `transition` and `slew`.


Be aware that using the `$discontinuity` function does not guarantee that the simulator will be able to handle a discontinuity successfully. If possible, you should avoid discontinuities in the circuits you model.

The following example shows how you might use the `$discontinuity` function while describing the behavior of a source that generates a triangular wave. As the [Triangular Wave](#) figure on page 119 shows, the triangular wave is continuous, but as the [Triangular Wave First Derivative](#) figure on page 119 shows, the first derivative of the wave is discontinuous.

### Triangular Wave



### Triangular Wave First Derivative



The module `trisource` describes this triangular wave source.

```
module trisource (vout) ;  
    output vout ;  
    voltage vout ;  
    parameter real wavelength = 10.0, amplitude = 1.0 ;  
    integer slope ;  
    real wstart ;
```

## Cadence Verilog-A Language Reference

### Simulator Functions

---

```
analog begin
  @(timer(0, wavelength)) begin
    slope = +1 ;
    wstart = $abstime ;
    $discontinuity (1);          // Change from neg to pos slope
  end
  @(timer(wavelength/2, wavelength)) begin
    slope = -1 ;
    wstart = $abstime ;
    $discontinuity (1);          // Change from pos to neg slope
  end
  V(vout) <+ amplitude * slope * (4 * ($abstime - wstart) / wavelength-1) ;
end
endmodule
```


The two `$discontinuity` functions in `trisource` tell the simulator about the discontinuities in the derivative. In response, the simulator uses analysis techniques that take the discontinuities into account.

The module `relay`, as another example, uses the `$discontinuity` function while modeling a relay.

```
module relay (c1, c2, pin, nin) ;
  inout c1, c2 ;
  input pin, nin ;
  electrical c1, c2, pin, nin ;
  parameter real r = 1 ;
analog begin
  @(cross(V(pin, nin) - 1, 0, 0.01n, pin.potential.abstol)) $discontinuity(0);
  if (V(pin, nin) >= 1)
    I(c1, c2) <+ V(c1, c2) / r ;
  else
    I(c1, c2) <+ 0 ;
end
endmodule
```


The `$discontinuity` function in `relay` tells the simulator that there is a discontinuity in the current when the voltage crosses the value 1. For example, passing a triangular wave like that shown in the [Relay Voltage](#) figure on page 120 through module `relay` produces the discontinuous current shown in the [Relay Current](#) figure on page 121.

#### Relay Voltage

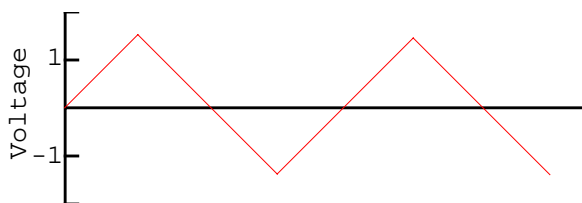



## Relay Current

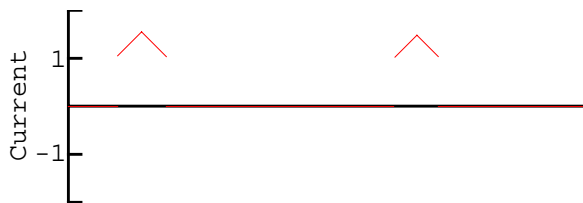

## Bounding the Time Step

Use the `$bound_step` function to specify the maximum time allowed between adjacent time points during simulation.

```
bound_step_function ::=  
    $bound_step ( max_step )  
max_step ::=  
    constant_expression
```

By specifying appropriate time steps, you can force the simulator to track signals as closely as your model requires. For example, module `sinwave` forces the simulator to simulate at least 50 time points during each cycle.

```
module sinwave (outsig) ;  
    output outsig ;  
    voltage outsig ;  
    parameter real freq = 1.0, ampl = 1.0 ;  
    analog begin  
        V(outsig) <+ ampl * sin(2.0 * `M_PI * freq * $abstime) ;  
        $bound_step(0.02 / freq) ;           // Max time step = 1/50 period  
    end  
endmodule
```

## Announcing and Handling Nonlinearities

Use the `$limit` function to announce nonlinearities that are other than exponential. This information is used to improve convergence.

```
limit_call_function ::=  
    $limit ( access_function_reference )  
    | $limit ( access_function_reference, string, arg_list )  
    | $limit ( access_function_reference, analog_function_ID, arg_list )
```

`access_function_reference` is the reference that is being limited.

`string` is a built-in simulator function that you recommend be used to compute the return value. In this release, the syntax of `string` is not checked.

`analog_function_ID` is a user-defined analog function that you recommend be used to compute the return value. In this release, the syntax of `analog_function_ID` is not checked.

`arg_list` is a list of arguments for the built-in or user-defined function. In this release, the syntax of `arg_list` is not checked.

**Note:** Although the `$limit` function is allowed, Cadence tools, in this release, do nothing with the information. Consequently, coding

```
vdio = $limit(V(a,c), spicepnjlim, $vt, vcrit);
```

is equivalent to coding

```
vdio = V(a,c);
```

## Finding When a Signal Is Zero

Use the `last_crossing` function to find out what the simulation time was when a signal expression last crossed zero.

```
last_crossing_function ::=  
    last_crossing ( signal_expression , direction )
```

Set *direction* to indicate which crossings the simulator should detect.

---

If you want to	Then
Detect all crossings	Set <i>direction</i> equal to 0
Detect only crossings where the value is increasing	Set <i>direction</i> equal to +1
Detect only crossings where the value is decreasing	Set <i>direction</i> equal to -1

---

Before the first detectable crossing, the `last_crossing` function returns a negative value.

The `last_crossing` function is subject to the restrictions listed in [“Restrictions on Using Analog Operators”](#) on page 144.

The `last_crossing` function does not control the time step to get accurate results and uses interpolation to estimate the time of the last crossing. To improve the accuracy, you might want to use the `last_crossing` function together with the `cross` function.

For example, module `period` calculates the period of the input signal, using the `cross` function to resolve the times accurately.

```
module period (in) ;
input in ;
voltage in ;
integer crosscount ;
real latest, earlier ;
analog begin
    @(initial_step) begin
        crosscount = 0 ;
        earlier = 0 ;
    end

    @(cross(V(in), +1)) begin
        crosscount = crosscount + 1 ;
        earlier = latest ;
    end
    latest = last_crossing(V(in), +1) ;
    @(final_step) begin
        if (crosscount < 2)
            $strobe("Could not measure the period.") ;
        else
            $strobe("Period = %g, Crosscount = %d", latest-earlier, crosscount) ;
        end
    end
end
endmodule
```

## Querying the Simulation Environment

Use the simulation environment functions described in the following sections to obtain information about the current simulation environment.

### Obtaining the Current Simulation Time

Verilog-A provide two environment parameter functions that you can use to obtain the current simulation time: `$abstime` and `$realtime`.

#### **`$abstime` Function**

Use the `$abstime` function to obtain the current simulation time in seconds.

```
abstime_function ::=
    $abstime
```

#### **`$realtime` Function**

Use the `$realtime` function to obtain the current simulation time in seconds.

## Cadence Verilog-A Language Reference

### Simulator Functions

---

```
realtime_function ::=  
    $realtime[(time_scale)]
```

*time\_scale* is a value used to scale the returned simulation time. The valid values are the integers 1, 10, and 100, followed by one of the scale factors in the following table.

Scale Factor	Meaning
s	Seconds
ms	Milliseconds
us	Microseconds
ns	Nanoseconds
ps	Picoseconds
fs	Femtoseconds

If you do not specify *time\_scale*, the return value is scaled to the ``time_unit` of the module that invokes the function.

For example, to print out the current simulation time in seconds, you might code

```
$strobe("Simulation time = %e", $realtime(1s)) ;
```

## Obtaining the Current Ambient Temperature

Use the `$temperature` function to obtain the ambient temperature of a circuit in degrees Kelvin.

```
temperature_function ::=  
    $temperature
```

## Obtaining the Thermal Voltage

Use the `$vt` function to obtain the thermal voltage,  $(kT/q)$ , of a circuit.

```
vt_function ::=  
    $vt[(temp)]
```

*temp* is the temperature, in degrees Kelvin, at which the thermal voltage is to be calculated. If you do not specify *temp*, the thermal voltage is calculated at the temperature returned by the `$temperature` function.

## Querying the scale, gmin, and iteration Simulation Parameters

Use the `$simparam` function to query the value of the `scale`, `gmin`, or `iteration` simulation parameters. The returned value is always a real value.

```
simparam_function ::=  
    $simparam ("param" [, expression])
```

*param* is one of the following simulation parameters.

---

Simulation Parameter	Meaning
scale	Scale factor for device instance geometry parameters.
gmin	Minimum conductance placed in parallel with nonlinear branches.
iteration	Iteration number of the analog solver.

---

*expression* is an expression whose value is returned if *param* is not recognized.

For example, to return the value of the simulation parameter named `gmin`, you might code

```
$strobe("gmin = %e", $simparam("gmin")) ;
```

To specify that a value of 2.0 is to be returned when the specified simulation parameter is not found, you might code

```
$strobe("gmin = %e", $simparam("gmin", 2.0)) ;
```

## Detecting Parameter Overrides

Use the `$param_given` function to determine whether a parameter value was obtained from the default value in its declaration statement or if that value was overridden.

```
$param_given_function ::=  
    $param_given(module_parameter_identifier)
```

*module\_parameter\_identifier* is the parameter for which it is determined whether the value was overridden. The return value of the function is 1 if the specified parameter was overridden by a module instance parameter value assignment. The return value is 0 otherwise.

The `$param_given` function can be used in a `genvar` expression.

For example, the following fragment allows the code to behave differently when `tdevice` has the default value set by the declaration statement and when the value is actually set by an override.

```
if ($param_given(tdevice))
    temp = tdevice + 'P_CELSIUS0;
else
    temp = $temperature;
```

## Obtaining and Setting Signal Values

Use the access functions to obtain or set the signal values.

```
access_function_reference ::=
    bvalue
    | pvalue
bvalue ::=
    access_identifier ( analog_signal_list )
analog_signal_list ::=
    branch_identifier
    | array_branch_identifier [ genvar_expression ]
    | net_or_port_scalar_expression
    | net_or_port_scalar_expression , net_or_port_scalar_expression
net_or_port_scalar_expression ::=
    net_or_port_identifier
    | vector_net_or_port_identifier [ genvar_expression ]
pvalue ::=
    flow_access_identifier (port_identifier,port_identifier)
```

Access functions in Verilog-A take their names from the discipline associated with a node, port, or branch. Specifically, the access function names are defined by the access attributes specified for the discipline's natures.

For example, the `electrical` discipline, as defined in the standard definitions, uses the nature `Voltage` for potential. The nature `Voltage` is defined with the access attribute equal to `v`. Consequently, the access function for electrical potential is named `v`. For additional information, see [Appendix C, "Standard Definitions."](#)

To set a voltage, use the `v` access function on the left side of a contribution statement.

```
V(out) <+ I(in) * Rparam ;
```

To obtain a voltage, you might use the `v` access function as illustrated in the following fragment.

```
I(c1, c2) <+ V(c1, c2) / r ;
```

You can apply access functions only to scalars or to individual elements of a vector. The scalar element of a vector is selected with an index. For example, `v(in[1])` accesses the voltage `in[1]`.

To see how you can use access functions, consult the "Access Function Formats" table. In the table, `b1` refers to a branch, `n1` and `n2` refer to either nodes or ports, and `p1` refers to a port. To make the example concrete, the branches, nodes, and ports used in the table belong

## Cadence Verilog-A Language Reference

### Simulator Functions

to the `electrical` discipline, where `V` is the name of the access function for the voltage (potential) and `I` is the name of the access function for the current (flow). Access functions for other disciplines have different names, but you use them in the same ways. For example, `MMF` is the access function for potential in the `magnetic` discipline.

#### Access Function Formats

Format	Effect
<code>V(b1)</code>	Accesses the potential across branch <code>b1</code>
<code>V(n1)</code>	Accesses the potential of <code>n1</code> relative to ground
<code>V(n1,n2)</code>	Accesses the potential difference on the unnamed branch between <code>n1</code> and <code>n2</code>
<code>I(b1)</code>	Accesses the current on branch <code>b1</code>
<code>I(n1)</code>	Accesses the current flowing from <code>n1</code> to ground
<code>I(n1, n2)</code>	Accesses the current flowing on the unnamed branch between <code>n1</code> and <code>n2</code> ; node <code>n1</code> and node <code>n2</code> cannot be the same node
<code>I(p1,p1)</code>	Accesses the current flow into the module through port <code>p1</code> . This format accesses the port branch associated with port <code>p1</code> .

You can use a port access to monitor the flow. In the following example, the simulator issues a warning if the total diode current becomes too large.

```
module diode (a, c) ;
  electrical a, c ;
  branch (a, c) diode, cap ;
  parameter real is=1e-14, tf=0, cjo=0, imax=1, phi=0.7 ;
  analog begin
    I(diode) <+ is*(limexp(V(diode)/$vt) -1) ;
    I(cap) <+ ddt(tf*I(diode) - 2 * cjo * sqrt(phi * (phi * V(cap)))) ;
    if (I(a,a) > imax) // Checks current through port
      $strobe( "Warning: diode is melting!" ) ;
  end
endmodule
```

## Accessing Attributes

Use the hierarchical referencing operator to access the attributes for a node or branch.

```
attribute_reference ::=
    node_identifier.pot_or_flow.attribute_identifier
pot_or_flow ::=
    potential
    | flow
```

*node\_identifier* is the node or branch whose attribute you want to access.

*attribute\_identifier* is the attribute you want to access.

For example, the following fragment illustrates how to access the abstol values for a node and a branch.

```
electrical a, b, n1, n2;
branch (n1, n2) cap ;
parameter real c= 1p;
analog begin
    I(a,b) <+ c*ddt(V(a,b), a.potential.abstol) ; // Access abstol for node
    I(cap) <+ c*ddt(V(cap), n1.potential.abstol) ; // Access abstol for branch
end
```

## Analysis-Dependent Functions

The analysis-dependent functions change their behavior according to the type of analysis being performed.

### Determining the Current Analysis Type

Use the `analysis` function to determine whether the current analysis type matches a specified type. By using this function, you can design modules that change their behavior during different kinds of analyses.

```
analysis ( analysis_list )
analysis_list ::=
    analysis_name { , analysis_name }
analysis_name ::=
    "analysis_type"
```

*analysis\_type* is one of the following analysis types.

### Analysis Types and Descriptions

---

Analysis Type	Analysis Description
ac	AC analysis
dc	OP or DC analysis
dcmatch	DC device matching analysis
montecarlo	Monte Carlo analysis
pac	Periodic AC (PAC) analysis
pnoise	Periodic noise (PNoise) analysis



## Cadence Verilog-A Language Reference

### Simulator Functions

#### Analysis Types and Descriptions, *continued*

Analysis Type	Analysis Description
<code>pss</code>	Periodic steady-state analysis
<code>pxf</code>	Periodic transfer function analysis
<code>qpss</code>	Quasi-periodic steady state analysis
<code>sp</code>	S-parameter analysis
<code>static</code>	Any equilibrium point calculation, including a DC analysis as well as those that precede another analysis, such as the DC analysis that precedes an AC or noise analysis, or the initial-condition analysis that precedes a transient analysis
<code>stb</code>	Stability analysis
<code>tdr</code>	Time-domain reflectometer analysis
<code>tran</code>	Transient analysis
<code>xf</code>	Transfer function analysis

The following table describes the values returned by the `analysis` function for some of the commonly used analyses. A return value of 1 represents `TRUE` and a value of 0 represents `FALSE`.

Simulator Analysis Type							
Argument	DC	TRAN		AC		NOISE	
		OP	TRAN	OP	AC	OP	AC
<code>static</code>	1	1	0	1	0	1	0
<code>ic</code>	0	1	0	0	0	0	0
<code>dc</code>	1	0	0	0	0	0	0
<code>tran</code>	0	1	1	0	0	0	0
<code>ac</code>	0	0	0	1	1	0	0
<code>noise</code>	0	0	0	0	0	1	1

You can use the `analysis` function to make module behavior dependent on the current analysis type.

```
if (analysis("dc", "ic"))
    out = ! V(in) > 0.0 ;
else
    @(cross (V(in),0)) out = ! out
V(out) <+ transition (out, 5n, 1n, 1n) ;
```

## Implementing Small-Signal AC Sources

Use the `ac_stim` function to implement a sinusoidal stimulus for small-signal analysis.

```
ac_stim ( [ "analysis_type" [ , mag [ , phase]] ] )
```

*analysis\_type*, if you specify it, must be one of the analysis types listed in the [Analysis Types and Descriptions](#) table on page 128. The default for *analysis\_type* is *ac*. The *mag* argument is the magnitude, with a default of 1. *phase* is the phase in radians, with a default of 0.

The `ac_stim` function models a source with magnitude *mag* and phase *phase* only during the *analysis\_type* analysis. During all other small-signal analyses, and during large-signal analyses, the `ac_stim` function returns 0.

## Implementing Small-Signal Noise Sources

Verilog-A provides three functions to support noise modeling during small-signal analyses:

- `white_noise` function
- `flicker_noise` function
- `noise_table` function

### White\_noise Function

Use the `white_noise` function to generate white noise, noise whose current value is completely uncorrelated with any previous or future values.

```
white_noise( PSD [ , "name" ] )
```

*PSD* is the power spectral density of the source where *PSD* is specified in units of  $A^2/Hz$  or  $V^2/Hz$ .

*name* is a label for the noise source. The simulator uses *name* to identify the contributions of noise sources to the total output noise. The simulator combines into a single source all noise sources with the same name from the same module instance.

The `white_noise` function is active only during small-signal noise analyses and returns 0 otherwise.

For example, you might include the following fragment in a module describing the behavior of a diode.

```
I(diode) <+ white_noise(2 * 'P_Q * Id, "shot" ) ;
```

For a resistor, you might use a fragment like the following.

```
V(res) <+ white_noise(4 * 'P_K * $temperature * rs, "thermal");
```

### **flicker\_noise Function**

Use the `flicker_noise` function to generate pink noise that varies in proportion to:

$$1/f^{\text{exp}}$$

The syntax for the `flicker_noise` function is

```
flicker_noise( power, exp [ , "name" ] )
```

*power* is the power of the source at 1 Hz.

*name* is a label for the noise source. The simulator uses *name* to identify the contributions of noise sources to the total output noise. The simulator combines into a single source all noise sources with the same name from the same module instance.

The `flicker_noise` function is active only during small-signal noise analyses and returns 0 otherwise.

For example, you might include the following fragment in a module describing the behavior of a diode:

```
I(diode) <+ flicker_noise( kf * pow(abs(I(diode))),af),ef) ;
```

### **Noise\_table Function**

Use the `noise_table` function to generate noise where the spectral density of the noise varies as a piecewise linear function of frequency.

```
noise_table(vector [ , "name" ] )
```

*vector* is an array containing pairs of real numbers. The first number in each pair is a frequency in hertz; the second number is the power at that frequency. The `noise_table` function uses linear interpolation to compute the spectral density for each frequency. At frequencies lower than the lowest frequency specified in the table, the associated power is

assumed to be the power associated with the lowest specified frequency. Similarly, at frequencies higher than the highest frequency specified in the table, the associated power is assumed to be the power associated with the highest specified frequency.

*name* is a label for the noise source. The simulator uses *name* to identify the contributions of noise sources to the total output noise. The simulator combines into a single source all noise sources with the same name from the same module instance.

The `noise_table` function is active only during small-signal noise analyses and returns 0 otherwise.

For example, you might include the following fragment in an analog block:

```
V(p,n) <+ noise_table({1,2,100,4,1000,5,1000000,6}, "noitab");
```

In this example, the power at every frequency lower than 1 is assumed to be 2; the power at every frequency above 1000000 is assumed to be 6.

## Generating Random Numbers

Use the `$random` function to generate a signed integer, 32-bit, pseudorandom number.

```
$random [ ( seed ) ] ;
```

*seed* is a reg, integer, or time variable used to initialize the function. The seed provides a starting point for the number sequence and allows you to restart at the same point. If, as Cadence recommends, you use *seed*, you must assign a value to the variable before calling the `$random` function.

The `$random` function generates a new number every time step.

Individual `$random` statements with different seeds generate different sequences, and individual `$random` statements with the same seed generate identical sequences.

The following code fragment uses the absolute value function and the modulus operator to generate integers between 0 and 99.

```
// There is a 5% chance of signal loss.
module randloss (pinout) ;
  electrical pinout ;
  integer randseed, randnum;
analog begin
  @ (initial_step) begin
    randseed = 123 ;    // Initialize the seed just once
  end
  randnum = abs($random(randseed) % 100) ;
  if (randnum < 5)
    V(pinout) <+ 0.0 ;
  else
```

```
        V(pinout) <+ 3.0 ;  
end // of analog block  
endmodule
```

## Generating Random Numbers in Specified Distributions

Verilog-A provides functions that generate random numbers in the following distribution patterns:

- Uniform
- Normal (Gaussian)
- Exponential
- Poisson
- Chi-square
- Student's T
- Erlang

In releases prior to IC5.0, the functions beginning with `$dist` return real numbers rather than integer numbers. If you need to continue getting real numbers in more recent releases, change each `$dist` function to the corresponding `$rdist` function.

### Uniform Distribution

Use the `$rdist_uniform` function to generate random real numbers (or the `$dist_uniform` function to generate integer numbers) that are evenly distributed throughout a specified range. The `$rdist_uniform` function is not supported in digital contexts.

```
$rdist_uniform ( seed , start , end ) ;  
$dist_uniform ( seed , start , end ) ;
```

*seed* is a scalar integer variable used to initialize the sequence of generated numbers. *seed* must be a variable because the function updates the value of *seed* at each iteration. To ensure generation of a uniform distribution, change the value of *seed* only when you initialize the sequence.

*start* is an integer or real expression that specifies the smallest number that the `$dist_uniform` function is allowed to return. *start* must be smaller than *end*.

*end* is an integer or real expression that specifies the largest number that the \$dist\_uniform function is allowed to return. *end* must be larger than *start*.

The following module returns a series of real numbers, each of which is between 20 and 60 inclusively.

```
module distcheck (pinout) ;
electrical pinout ;
parameter integer start_range = 20 ;           // A parameter
integer seed, end_range;
real rrandnum ;
analog begin
    @ (initial_step) begin
        seed = 23 ;                           // Initialize the seed just once
        end_range = 60 ;                       // A variable
    end
    rrandnum = $rdist_uniform(seed, start_range, end_range);
    $display ("Random number is %g", rrandnum) ;
// The next line shows how the seed changes at each
// iterative use of the distribution function.
    $display ("Current seed is %d", seed) ;
    V(pinout) <+ rrandnum ;
end // of analog block
endmodule
```

## Normal (Gaussian) Distribution

Use the \$rdist\_normal function to generate random real numbers (or the \$dist\_normal function to generate integer numbers) that are normally distributed. The \$rdist\_normal function is not supported in digital contexts.

```
$rdist_normal ( seed , mean , standard_deviation ) ;
$dist_normal ( seed , mean , standard_deviation ) ;
```

*seed* is a scalar integer variable used to initialize the sequence of generated numbers. *seed* must be a variable because the function updates the value of *seed* at each iteration. To ensure generation of a normal distribution, change the value of *seed* only when you initialize the sequence.

*mean* is an integer or real expression that specifies the value to be approached by the mean value of the generated numbers.

*standard\_deviation* is an integer or real expression that determines the width of spread of the generated values around *mean*. Using a larger *standard\_deviation* spreads the generated values over a wider range.

To generate a gaussian distribution, use a *mean* of 0 and a *standard\_deviation* of 1. For example, the following module returns a series of real numbers that together form a gaussian distribution.

```
module distcheck (pinout) ;
electrical pinout ;
integer seed ;
real rrandnum ;

analog begin
    @ (initial_step) begin
        seed = 23 ;
    end
    rrandnum = $rdist_normal( seed, 0, 1 ) ;
    $display ("Random number is %g", rrandnum ) ;
    V(pinout) <+ rrandnum ;
end // of analog block
endmodule
```

## Exponential Distribution

Use the `$rdist_exponential` function to generate random real numbers (or the `$dist_exponential` function to generate integer numbers) that are exponentially distributed. The `$rdist_exponential` function is not supported in digital contexts.

```
$rdist_exponential ( seed , mean ) ;  
$dist_exponential ( seed , mean ) ;
```

*seed* is a scalar integer variable used to initialize the sequence of generated numbers. *seed* must be a variable because the function updates the value of *seed* at each iteration. To ensure generation of an exponential distribution, change the value of *seed* only when you initialize the sequence.

*mean* is an integer or real value greater than zero. *mean* specifies the value to be approached by the mean value of the generated numbers.

For example, the following module returns a series of real numbers that together form an exponential distribution.

```
module distcheck (pinout) ;
electrical pinout ;
integer seed, mean ;
real rrandnum ;

analog begin
    @ (initial_step) begin
        seed = 23 ;
        mean = 5 ;                // Mean must be > 0
    end
    rrandnum = $rdist_exponential(seed, mean) ;
    $display ("Random number is %g", rrandnum ) ;
    V(pinout) <+ rrandnum ;
end // of analog block
endmodule
```

## Poisson Distribution

Use the `$rdist_poisson` function to generate random real numbers (or the `$dist_poisson` function to generate integer numbers) that form a Poisson distribution. The `$rdist_poisson` function is not supported in digital contexts.

```
$rdist_poisson ( seed , mean ) ;  
$dist_poisson ( seed , mean ) ;
```

*seed* is a scalar integer variable used to initialize the sequence of generated numbers. *seed* must be a variable because the function updates the value of *seed* at each iteration. To ensure generation of a Poisson distribution, change the value of *seed* only when you initialize the sequence.

*mean* is an integer or real value greater than zero. *mean* specifies the value to be approached by the mean value of the generated numbers.

For example, the following module returns a series of real numbers that together form a Poisson distribution.

```
module distcheck (pinout) ;  
  electrical pinout ;  
  integer seed, mean ;  
  real rrandnum ;  
  
  analog begin  
    @ (initial_step) begin  
      seed = 23 ;  
      mean = 5 ;                      // Mean must be > 0  
    end  
    rrandnum = $rdist_poisson(seed, mean) ;  
    $display ("Random number is %g", rrandnum) ;  
    V(pinout) <+ rrandnum ;  
  end // of analog block  
endmodule
```

## Chi-Square Distribution

Use the `$rdist_chi_square` function to generate random real numbers (or the `$dist_chi_square` function to generate integer numbers) that form a chi-square distribution. The `$rdist_chi_square` function is not supported in digital contexts.

```
$rdist_chi_square ( seed , degree_of_freedom ) ;  
$dist_chi_square ( seed , degree_of_freedom ) ;
```

*seed* is a scalar integer variable used to initialize the sequence of generated numbers. *seed* must be a variable because the function updates the value of *seed* at each iteration. To ensure generation of a chi-square distribution, change the value of *seed* only when you initialize the sequence.



*degree\_of\_freedom* is an integer value greater than zero. *degree\_of\_freedom* determines the width of spread of the generated values. Using a larger *degree\_of\_freedom* spreads the generated values over a wider range.

For example, the following module returns a series of real numbers that together form a chi-square distribution.

```
module distcheck (pinout) ;
  electrical pinout ;
  integer seed, dof ;
  real rrandnum ;

  analog begin
    @ (initial_step) begin
      seed = 23 ;
      dof = 5 ;           // Degree of freedom must be > 0
    end
    rrandnum = $rdist_chi_square(seed, dof) ;
    $display ("Random number is %g", rrandnum) ;
    V(pinout) <+ rrandnum ;
  end // of analog block
endmodule
```

## Student's T Distribution

Use the `$rdist_t` function to generate random real numbers (or the `$dist_t` function to generate integer numbers) that form a Student's T distribution. The `$rdist_t` function is not supported in digital contexts.

```
$rdist_t ( seed , degree_of_freedom ) ;  
$dist_t ( seed , degree_of_freedom ) ;
```

*seed* is a scalar integer variable used to initialize the sequence of generated numbers. *seed* must be a variable because the function updates the value of *seed* at each iteration. To ensure generation of a Student's T distribution, change the value of *seed* only when you initialize the sequence.

*degree\_of\_freedom* is an integer value greater than zero. *degree\_of\_freedom* determines the width of spread of the generated values. Using a larger *degree\_of\_freedom* spreads the generated values over a wider range.

For example, the following module returns a series of real numbers that together form a Student's T distribution.

```
module distcheck (pinout) ;
  electrical pinout ;
  integer seed, dof ;
  real rrandnum ;

  analog begin
    @ (initial_step) begin
      seed = 23 ;
      dof = 15 ; // Degree of freedom must be > 0
    end
  end
endmodule
```

```
    end
    rrandnum = $rdist_t(seed, dof) ;
    $display ("Random number is %g", rrandnum ) ;
    V(pinout) <+ rrandnum ;
end // of analog block
endmodule
```

## Erlang Distribution

Use the `$rdist_erlang` function to generate random real numbers (or the `$dist_erlang` function to generate integer numbers) that form an Erlang distribution. The `$rdist_erlang` function is not supported in digital contexts.

```
$rdist_erlang ( seed , k , mean ) ;  
$dist_erlang ( seed , k , mean ) ;
```

*seed* is a scalar integer variable used to initialize the sequence of generated numbers. *seed* must be a variable because the function updates the value of *seed* at each iteration. To ensure generation of an Erlang distribution, change the value of *seed* only when you initialize the sequence.

*k* is an integer value greater than zero. Using a larger value for *k* decreases the variance of the distribution.

*mean* is an integer or real value greater than zero. *mean* specifies the value to be approached by the mean value of the generated numbers.

For example, the following module returns a series of real numbers that together form an Erlang distribution.

```
module distcheck (pinout) ;
electrical pinout ;
integer seed, k, mean ;
real rrandnum ;
analog begin
    @ (initial_step) begin
        seed = 23 ;
        k = 20 ;                // k must be > 0
        mean = 15 ;            // Mean must be > 0
    end
    rrandnum = $rdist_erlang(seed, k, mean) ;
    $display ("Random number is %g", rrandnum ) ;
    V(pinout) <+ rrandnum ;
end // of analog block
endmodule
```

## Interpolating with Table Models

Use the `$table_model` function to model the behavior of a design by interpolating between and extrapolating outside of data points.

```
table_model_declaration ::=
    $table_model(variables , table_source [ , ctrl_string ] )
variables ::=
    independent_var { , independent_var }
table_source ::=
    data_file
    | table_model_array
data_file ::=
    "filename"
    | string_param
table_model_array ::=
    array_ID { , array_ID } , output_array_ID
ctrl_string ::=
    "sub_ctrl_string { , sub_ctrl_string }"
sub_ctrl_string ::=
    I
    | D
    | [ degree_char ] [ extrap_char [ extrap_char ] ]
degree_char ::=
    1 | 2 | 3
extrap_char ::=
    C | L | S | E
```

*independent\_var* is a numerical expression used as an independent model variable. It can be any legal expression that can be assigned to an analog signal. There must be an independent model variable specified for each dimension with a corresponding *sub\_ctrl\_string* other than I (ignore). There must not be an independent model variable specified for dimensions that have a *sub\_ctrl\_string* of I (ignore).

*data\_file* is the text file that stores the sample points. You can either give the file name directly or use a string parameter. For more information, see [“Table Model File Format”](#) on page 140.

*table\_model\_array* is a set of one-dimensional arrays that contains the data points to be passed to the `$table_model` function. The size of the arrays is the same as the number of sample points. The data is stored in the arrays so that for the  $k^{\text{th}}$  dimension of the  $i^{\text{th}}$  sample point,  $k^{\text{th}}_{dim\_array\_identifier}[i] = X_{ik}$  and so that for the  $i^{\text{th}}$  sample point  $output\_array\_identifier[i] = Y_i$ . For an example, see [“Example: Preparing Data in One-Dimensional Array Format”](#) on page 142.

*ctrl\_string* controls the numerical aspects of the interpolation process. It consists of subcontrol strings for each dimension.

`sub_ctrl_string` specifies the handling for each dimension.

The `I` (ignore) value specifies that the corresponding dimension (column) in the data file is to be ignored. You might use this setting to skip over index numbers, for example. When you associate the `I` (ignore) value with a dimension, you must not specify a corresponding *independent\_var* for that dimension.

The `D` (discrete) value specifies that no interpolation is to occur for this dimension. If the exact value passed to the function for the dimension is not found in the corresponding dimension in the data file, an error is issued and simulation stops.

`degree_char` is the degree of the splines used for interpolation. The degree must not be zero or exceed 3. The default value is 1.

`extrap_char` controls how the simulator evaluates a point that is outside the region of sample points included in the data file. The `C` (clamp) extrapolation method uses a horizontal line that passes through the nearest sample point, also called the end point, to extend the model evaluation. The `L` (linear) extrapolation method, which is the default method, models the extrapolation through a tangent line at the end point. The `S` (spline) extrapolation method uses the polynomial for the nearest segment (the segment at the end) to evaluate a point beyond the interpolation area. The `E` (error) extrapolation method issues a warning when the point to be evaluated is beyond the interpolation area.

You can specify the extrapolation method to be used for each end of the sample point region. When you do not specify an `extrap_char` value, the linear extrapolation method is used for both ends. When you specify only one `extrap_char` value, the specified extrapolation method is used for both ends. When you specify two `extrap_char` values, the first character specifies the extrapolation method for the end with the smaller coordinate value, and the second character specifies the method for the end with the larger coordinate value.

The `$table_model` function is subject to the same restrictions as analog operators with respect to where the function can be used. For more information, see [“Restrictions on Using Analog Operators”](#) on page 144.

## Table Model File Format

The data in the table model file must be in the form of a family of ordered isolines. An *isoline* is a curve of at least two values generated when one variable is swept and all other variables are held constant. An *ordered isoline* is an isoline in which the sweeping variable is either monotonically increasing or monotonically decreasing. A *monotonically increasing* variable is one in which every subsequent value is equal to or greater than the previous value. A *monotonically decreasing* variable is one in which every subsequent value is equal to or less than the previous value.

For example, a bipolar transistor can be described by a family of isolines, where each isoline is generated by holding the base current constant and sweeping the collector voltage from 0 to some maximum voltage. If the collector voltage sweeps monotonically, the generated isoline is an ordered isoline. In this example, the collector voltage takes many values for each of the isolines so the voltage is the *fastest changing* independent variable and the base current is the *slowest changing* independent variable. You need to know the fastest changing and slowest changing independent variables to arrange the data correctly in the table model file.

The sample points are stored in the file in the following format:

```
P1
P2
P3
...
PM
```

where  $P_i$  ( $i = 1...M$ ) are the sample points. Each sample point  $P_i$  is on a separate line and is represented as a sequence of numbers,  $X_{i1} X_{i2} \dots X_{iN} Y_i$  where  $N$  is the highest dimension of the model,  $X_{ik}$  is the coordinate of the sample point in the  $k$ th dimension, and  $Y_i$  is the model value at this point.  $X_{i1}$  (the leftmost variable) must be the slowest changing variable,  $X_{iN}$  (the rightmost variable other than the model value) must be the fastest changing variable, and the other variables must be arranged in between from slowest changing to fastest changing. Comments, which begin with #, can be inserted anyplace in the file and continue to the end of the line.

For example, to create a table model with three ordered isolines representing the function

$$z = f(x, y) = x + y^2$$

you build the model as follows, assuming that you want to have four sample values on each isoline. The  $y$  values used here are all the same and equally spaced on each isoline, but they do not have to be.

Isoline 1:  $x=1$

```
y = 1, 2, 3, 4
z = 2, 5, 10, 17
```

Isoline 2:  $x=2$

```
y = 1, 2, 3, 4
z = 3, 6, 11, 18
```

Isoline 3:  $x=3$

```
y = 1, 2, 3, 4
z = 4, 7, 12, 19
```

Finally, you decide to prefix each row with an index. The function will be specified so as to ignore this new column of data.

You enter the table model data into the file as

```
# Indx is the index column to be ignored.
# x is the slowest changing independent variable.
# y is the fastest changing independent variable.
# z is the table model value at each point.
#  Indx    x    y    z
#  1      1    1    2
#  2      1    2    5
#  3      1    3   10
#  4      1    4   17
#  5      2    1    3
#  6      2    2    6
#  7      2    3   11
#  8      2    4   18
#  9      3    1    4
# 10      3    2    7
# 11      3    3   12
# 12      3    4   19
```

## Example: Using the \$table\_model Function

For example, assume that you have a data file named `nmos.tbl`, which contains the data given above. You might use it in a module as follows.

```
`include "disciplines.vams"
`include "constants.vams"

module mynmos (g, d, s);
  electrical g, d, s;
  inout g, d, s;

  analog begin
    I(d, s) <+ $table_model (V(g, s), V(d, s), "nmos.tbl", "I,3CL,3CL");
  end
endmodule
```

In this example, the first column of data is ignored. The independent variables are  $V(g, s)$  and  $V(d, s)$ . The degree of the splines used for interpolation is 3 for each of the two active dimensions. For each of these dimensions, the extrapolation method for the lower end is clamping and the extrapolation for the upper end is linear.

## Example: Preparing Data in One-Dimensional Array Format

In this example, there are 18 sample points. Consequently, each of the one-dimensional arrays contains 18 bits. Each point has two independent variables, represented by  $x$  and  $y$ , and a value, represented by  $f_{xy}$ .

```
module measured_resistance (a, b);
  electrical a, b;
```

```
inout a, b;
real x[0:17], y[0:17], f_xy[0:17];
analog begin
  @(initial_step) begin
    x[0]= -10; y[0]=-10; f_xy[0]=0; // 0th sample point
    x[1]= -10; y[1]=-8; f_xy[1]=-0.4; // 1st sample point
    x[2]= -10; y[2]=-6; f_xy[2]=-0.8; // 2nd sample point
    x[3]= -9; y[3]=-10; f_xy[3]=0.2;
    x[4]= -9; y[4]=-8; f_xy[4]=-0.2;
    x[5]= -9; y[5]=-6; f_xy[5]=-0.6;
    x[6]= -9; y[6]=-4; f_xy[6]=-1;
    x[7]= -8; y[7]=-10; f_xy[7]=0.4;
    x[8]= -8; y[8]=-9; f_xy[8]=0.2;
    x[9]= -8; y[9]=-7; f_xy[9]=-0.2;
    x[10]= -8; y[10]=-5; f_xy[10]=-0.6;
    x[11]= -8; y[11]=-3; f_xy[11]=-1;
    x[12]= -7; y[12]=-10; f_xy[12]=0.6;
    x[13]= -7; y[13]=-9; f_xy[13]=0.4;
    x[14]= -7; y[14]=-8; f_xy[14]=0.2;
    x[15]= -7; y[15]=-7; f_xy[15]=0;
    x[16]= -7; y[16]=-6; f_xy[16]=-0.2;
    x[17]= -7; y[17]=-5; f_xy[17]=-0.4;
  end
  I(a, b) <+ $table_model (V(a), V(b), x, y, f_xy, "3L,1L");
end
endmodule
```

## Analog Operators

Analog operators are functions that operate on more than just the current value of their arguments. These functions maintain an internal state and produce a return value that is a function of an input expression, the arguments, and their internal state.

The analog operators are the

- Limited exponential function
- Time derivative operator
- Time integral operator
- Circular integrator operator
- Delay operator
- Transition filter
- Slew filter
- Laplace transform filters
- Z-transform filters

## Restrictions on Using Analog Operators

Analog operators are subject to these restrictions:

- You can use analog operators inside an `if` or `case` construct only if the controlling conditional expression consists entirely of `genvar` expressions, literal numerical constants, parameters, or the `analysis` function.
- You cannot use analog operators in `repeat`, `while`, or `for` statements.
- You cannot use analog operators inside a function.
- You cannot specify a null argument in the argument list of an analog operator.

## Limited Exponential Function

Use the limited exponential function to calculate the exponential of a real argument.

`limexp( expr )`

*expr* is a dynamic expression of type `real`.

The `limexp` function limits the iteration step size to improve convergence. `limexp` behaves like the `exp` function, except that using `limexp` to model semiconductor junctions generally results in dramatically improved convergence. For information on the `exp` function, see [“Standard Mathematical Functions”](#) on page 106.

The `limexp` function is subject to the restrictions listed in [“Restrictions on Using Analog Operators”](#) on page 144.

## Time Derivative Operator

Use the time derivative operator to calculate the time derivative of an argument.

`ddt( input [ , abstol | nature ] )`

*input* is a dynamic expression.

*abstol* is a constant specifying the absolute tolerance that applies to the output of the `ddt` operator. Set *abstol* at the largest signal level that you consider negligible. In this release of Verilog-A, *abstol* is ignored.

*nature* is a nature from which the absolute tolerance is to be derived. In this release of Verilog-A, *nature* is ignored.



The time derivative operator is subject to the restrictions listed in [“Restrictions on Using Analog Operators”](#) on page 144.

In DC analyses, the `ddt` operator returns 0. In small-signal analyses, the `ddt` operator phase-shifts *expr* according to the following formula.

$$output(\omega) = j \cdot \omega \cdot input(\omega)$$

To define a higher order derivative, you must use an internal node or signal. For example, a statement such as the following is illegal.

```
V(out) <+ ddt(ddt(V(in))) // ILLEGAL!
```

For an example illustrating how to define higher order derivatives correctly, see [“Using Integration and Differentiation with Analog Signals”](#) on page 40.

## Time Integral Operator

Use the time integral operator to calculate the time integral of an argument.

```
idt( input [ , ic [ , assert [ , abstol | nature ] ] ] )
```

*input* is a dynamic expression to be integrated.

*ic* is a dynamic expression specifying the initial condition.

*assert* is a dynamic integer-valued parameter. To reset the integration, set *assert* to a nonzero value.

*abstol* is a constant explicit absolute tolerance that applies to the input of the `idt` operator. Set *abstol* at the largest signal level that you consider negligible.

*nature* is a nature from which the absolute tolerance is to be derived.

The time integral operator is subject to the restrictions listed in [“Restrictions on Using Analog Operators”](#) on page 144.

## Cadence Verilog-A Language Reference

### Simulator Functions

The value returned by the `idt` operator during DC or AC analysis depends on which of the parameters you specify.

If you specify	Then <code>idt</code> returns
<code>input</code>	$\int_0^t x(\tau) d\tau$ <p>The time-integral of <math>x</math> from 0 to <math>t</math> with the initial condition being computed in the DC analysis.</p>
<code>input, ic</code>	$\int_0^t x(\tau) d\tau + ic$ <p>The time-integral of <math>x</math> from 0 to <math>t</math> with initial condition <math>ic</math>. In DC or IC analyses, returns <math>ic</math>.</p>
<code>input, ic, assert</code>	$\int_{t_0}^t x(\tau) d\tau + ic$ <p>The time-integral of <math>x</math> from <math>t_0</math> to <math>t</math> with initial condition <math>ic</math>. In DC or IC analyses, and when <code>assert</code> is nonzero, returns <math>ic</math>. <math>t_0</math> is the time when <code>assert</code> last became 0.</p>
<code>input, ic, assert, abstol</code>	$\int_{t_0}^t x(\tau) d\tau + ic$ <p>The time-integral of <math>x</math> from <math>t_0</math> to <math>t</math> with initial condition <math>ic</math>. In DC or IC analysis, and when <code>assert</code> is nonzero, returns <math>ic</math>. <math>t_0</math> is the time when <code>assert</code> last became 0.</p>
<code>input, ic, assert, nature</code>	$\int_{t_0}^t x(\tau) d\tau + ic$ <p>The time-integral of <math>x</math> from <math>t_0</math> to <math>t</math> with initial condition <math>ic</math>. In DC or IC analysis, and when <code>assert</code> is nonzero, returns <math>ic</math>. <math>t_0</math> is the time when <code>assert</code> last became 0.</p>

The initial condition forces the DC solution to the system. You must specify the initial condition, `ic`, unless you are using the `idt` operator in a system with feedback that forces `input` to zero. If you use a model in a feedback configuration, you can leave out the initial condition without any unexpected behavior during simulation. For example, an operational amplifier alone needs an initial condition, but the same amplifier with the right external feedback circuitry does not need that forced DC solution.

The following statement illustrates using `idt` with a specified initial condition.

```
V(out) <+ sin(2*`M_PI*(fc*$abstime + idt(gain*V(in),0))) ;
```

## Circular Integrator Operator

Use the circular integrator operator to convert an expression argument into its indefinitely integrated form.

```
idtmod(expr [ , ic [ , modulus [ , offset [ , abstol | nature ] ] ] )
```

*expr* is the dynamic integrand or expression to be integrated.

*ic* is a dynamic initial condition. By default, the value of *ic* is zero.

*modulus* is a dynamic value at which the output of `idtmod` is reset. *modulus* must be a positive value equation. If you do not specify *modulus*, `idtmod` behaves like the `idt` operator and performs no limiting on the output of the integrator.

*offset* is a dynamic value added to the integration. The default is zero.

The *modulus* and *offset* parameters define the bounds of the integral. The output of the `idtmod` function always remains in the range

```
offset < idtmod_output < offset+modulus
```

*abstol* is a constant explicit absolute tolerance that applies to the input of the `idtmod` operator. Set *abstol* at the largest signal level that you consider negligible.

*nature* is a nature from which the absolute tolerance is to be derived.

The circular integrator operator is subject to the restrictions listed in [“Restrictions on Using Analog Operators”](#) on page 144.

The value returned by the `idtmod` operator depends on which parameters you specify.

If you specify	Then <code>idtmod</code> returns
<i>expr</i>	$x = \int_0^t \text{expr}(\tau) d\tau$ <p>The time-integral of <i>expr</i> from 0 to <i>t</i> with the initial condition being computed in the DC analysis. Returns <i>x</i>.</p>

## Cadence Verilog-A Language Reference

### Simulator Functions

If you specify	Then idtmod returns
<i>expr, ic</i>	$x = \int_0^t \text{expr}(\tau) d\tau + ic$ <p>The time-integral of <i>expr</i> from 0 to <i>t</i> with initial condition <i>ic</i>. In DC or IC analysis, returns <i>ic</i>; otherwise, returns <i>x</i>.</p>
<i>expr, ic, modulus</i>	$x = \int_0^t \text{expr}(\tau) d\tau + ic$ <p>where <math>x = n * \text{modulus} + k</math>  <math>n = \dots -3, -2, -1, 0, 1, 2, 3 \dots</math>  Returns <i>k</i> where <math>0 &lt; k &lt; \text{modulus}</math></p>
<i>expr, ic, modulus, offset</i>	$x = \int_0^t \text{expr}(\tau) d\tau + ic$ <p>where <math>x = n * \text{modulus} + k</math>  Returns <i>k</i> where <math>\text{offset} &lt; k &lt; \text{offset} + \text{modulus}</math></p>
<i>expr, ic, modulus, offset, abstol</i>	$x = \int_0^t \text{expr}(\tau) d\tau + ic$ <p>where <math>x = n * \text{modulus} + k</math>  Returns <i>k</i> where <math>\text{offset} &lt; k &lt; \text{offset} + \text{modulus}</math></p>
<i>expr, ic, modulus, offset, nature</i>	$x = \int_0^t \text{expr}(\tau) d\tau + ic$ <p>where <math>x = n * \text{modulus} + k</math>  Returns <i>k</i> where <math>\text{offset} &lt; k &lt; \text{offset} + \text{modulus}</math></p>

The initial condition forces the DC solution to the system. You must specify the initial condition, *ic*, unless you are using *idtmod* in a system with feedback that forces *expr* to zero. If you use a model in a feedback configuration, you can leave out the initial condition without any unexpected behavior during simulation.

### Example

The circular integrator is useful in cases where the integral can get very large, such as in a voltage controlled oscillator (VCO). For example, you might use the following approach to generate arguments in the range  $[0, 2\pi]$  for the sinusoid.

```
phase = idtmod(fc + gain*V(IN), 0, 1, 0); //Phase is in range [0,1].
V(OUT) <+ sin(2*PI*phase);
```

## Derivative Operator

Use the `ddx` operator to access symbolically-computed partial derivatives of expressions in the analog block.

```
ddx (expr, potential_access_id (net_or_port_scalar_expr))
ddx (expr, flow_access_id (branch_id))
```

*expr* is a real or integer value expression. The derivative operator returns the partial derivative of this argument with respect to the unknown indicated by the second argument, with all other unknowns held constant and evaluated at the current operating point. If *expr* does not depend explicitly on the unknown, the derivative operator returns zero. The *expr* argument:

- Cannot be a dynamic expression, such as `ddx(ddt(...), ...)`
- Cannot be a nested expression, such as `ddx(ddx(...), ...)`
- Cannot include symbolically calculated expressions, such as `ddx(transition(...), ...)`
- Cannot include arrays, such as `ddx(a[0], ...)`
- Cannot contain unknown variables in the system of equations, such as `ddx(V(a), ...)`
- Cannot contain quantities that depend on other quantities, such as:  
`I(a,b)<+g*V(a,b); ddx(I(a,b), V(a))`

*potential\_access\_id* is the access operator for the potential of a scalar net or port.

*net\_or\_port\_scalar\_expr* is a scalar net or port.

*flow\_access\_id* is the access operator for the flow through a branch.

*branch\_id* is the name of a branch.

The derivative operator is subject to the restrictions listed in [“Restrictions on Using Analog Operators”](#) on page 144.

## Example

This example implements a voltage-controlled dependent current source. The names of the variables indicate the values of the partial derivatives: +1, -1, or 0. These values (scaled by the parameter *k*) can be used in a Newton-Raphson solution.

```
module vccs(pout,nout,pin,nin);
    electrical pout, nout, pin, nin;
```

```

inout pout, nout, pin, nin;
parameter real k = 1.0;
real vin, one, minusone, zero;
analog begin
    vin = V(pin,nin);
    one = ddx(vin, V(pin));
    minusone = ddx(vin, V(nin));
    zero = ddx(vin, V(pout));
    I(pout,nout) <+ k * vin;
end
endmodule

```

## Delay Operator

Use the `absdelay` operator to delay the entire signal of a continuously valued waveform.

**`absdelay( expr , time_delay [ , max_delay ] )`**

*expr* is a dynamic expression to be delayed.

*time\_delay*, a dynamic nonnegative value, is the length of the delay. If you specify *max\_delay*, you can change the value of *time\_delay* during a simulation, as long as the value remains in the range  $0 < time\_delay < max\_delay$ . Typically *time\_delay* is a constant but can also vary with time (when *max\_delay* is defined).

*max\_delay* is a constant nonnegative number greater than or equal to *time\_delay*. You cannot change *max\_delay* because the simulator ignores any attempted changes and continues to use the initial value.

For example, to delay an input voltage you might code

```
V(out) <+ absdelay(V(in), 5u) ;
```

The `absdelay` operator is subject to the restrictions listed in [“Restrictions on Using Analog Operators”](#) on page 144.

In DC and operating analyses, the `absdelay` operator returns the value of *expr* unchanged. In small-signal analyses, the `absdelay` operator phase-shifts *expr* according to the following formula.

$$output(\omega) = input(\omega) \cdot e^{-j\omega \cdot time\_delay}$$

In time-domain analyses, the `absdelay` operator introduces a transport delay equal to the instantaneous value of *time\_delay* based on the following formula.

$$Output(t) = Input(\max(t - time\_delay, 0))$$

## Transition Filter

Use the `transition` filter to smooth piecewise constant waveforms, such as digital logic waveforms. The `transition` filter returns a real number that over time describes a piecewise linear waveform. The `transition` filter also causes the simulator to place time points at both corners of a transition to assure that each transition is adequately resolved.

```
transition(input [, delay [, rise_time [, fall_time [, time_tol ]]])
```

*input* is a dynamic input expression that describes a piecewise constant waveform. It must have a real value. In DC analysis, the `transition` filter simply returns the value of *input*. Changes in *input* do not have an effect on the output value until *delay* seconds have passed.

*delay* is a dynamic nonnegative real value that is an initial delay. By default, *delay* has a value of zero.

*rise\_time* is a dynamic positive real value specifying the time over which you want positive transitions to occur. If you do not specify *rise\_time* or if you give *rise\_time* a value of 0, *rise\_time* defaults to the value defined by ``default_transition`.

*fall\_time* is a dynamic positive real number specifying the time over which you want negative transitions to occur. By default, *fall\_time* has the same value that *rise\_time* has. If you do not specify *rise\_time* or if you give *rise\_time* a value of 0, *fall\_time* defaults to the value defined by ``default_transition`.


*time\_tol* is a constant expression with a positive value. This option requires the simulator to place time points no more than the value of *time\_tol* away from the two corners of the transition.

If ``default_transition` is not specified, the default behavior of the `transition` filter approximates the ideal behavior of a zero-duration transition.

The `transition` filter is subject to the restrictions listed in [“Restrictions on Using Analog Operators”](#) on page 144.

With the `transition` filter, you can control transitions between discrete signal levels by setting the rise time and fall time of signal transitions. The `transition` filter stretches

instantaneous changes in signals over a finite amount of time, as shown below, and can also delay the transitions.

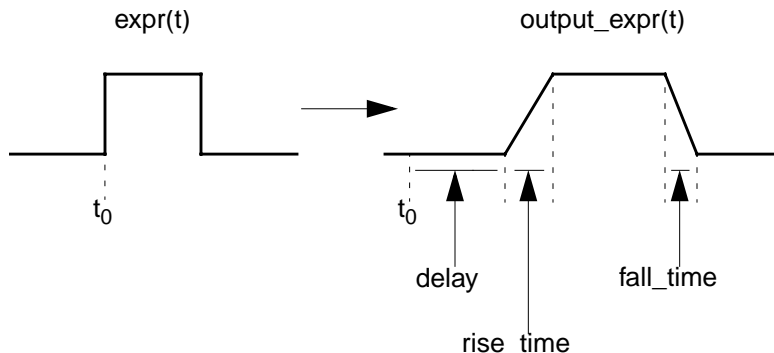

Use short transitions with caution because they can cause the simulator to slow down to meet accuracy constraints.

The next code fragment demonstrates how the `transition` filter might be used.

```
// comparator model
analog begin
    if ( V(in) > 0 ) begin
        Vout = 5 ;
    end
    else begin
        Vout = 0 ;
    end
    end
    V(out) <+ transition(Vout) ;
end
```



**The transition filter is designed to smooth out piecewise constant waveforms. If you apply the transition filter to smoothly varying waveforms, the simulator might run slowly, and the results will probably be unsatisfactory. For smoothly varying waveforms, consider using the slew filter instead. For information, see [“Slew Filter”](#) on page 154.**




## Cadence Verilog-A Language Reference

### Simulator Functions

If interrupted on a rising transition, the `transition` filter adjusts the slope so that at the revised end of the transition the value is that of the new destination.

If the new destination value is <i>below</i> the value at the point of interruption, the <code>transition</code> filter	If the new destination value is <i>above</i> the value at the point of interruption, the <code>transition</code> filter
<ol style="list-style-type: none"> <li>1. Uses the value of the original destination as the value of the new origin.</li> <li>2. Adjusts the slope of the transition to the rate at which the value would decay from the value of the new origin to the value of the new destination in <code>fall_time</code> seconds.</li> <li>3. Causes the value of the filter output to decay at the new slope, from the value at the point of interruption to the value at the new destination.</li> </ol>	<ol style="list-style-type: none"> <li>1. Retains the original origin.</li> <li>2. Adjusts the slope of the transition to the rate at which the value would increase from the value of the origin to the value of the new destination in <code>rise_time</code> seconds.</li> <li>3. Causes the value of the filter output to increase at the new slope, from the value at the point of interruption to the value at the new destination.</li> </ol>

In the following example, a rising transition is interrupted when it is about three fourths complete, and the value of the new destination is below the value at the point of interruption. The `transition` filter computes the slope that would complete a transition from the new origin (not the value at the point of interruption) in the specified `fall_time`. The `transition` filter then uses the computed slope to transition from the current value to the new destination.

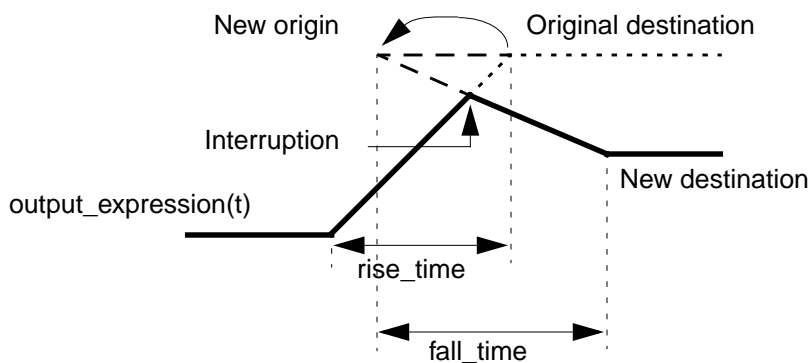

An interruption in a falling transition causes the transition filter to behave in an equivalent manner.

With larger delays, it is possible for a new transition to be specified before a previously specified transition starts. The `transition` filter handles this by deleting any transitions that would follow a newly scheduled transition. A `transition` filter can have an arbitrary number of transitions pending. You can use a `transition` filter in this way to implement the transport delay of discretely valued signals.

The following example implements a D-type flip flop. The `transition` filter smooths the output waveforms.

```
module d_ff(vin_d, vclk, vout_q, vout_qbar) ;
input vclk, vin_d ;
output vout_q, vout_qbar ;
electrical vout_q, vout_qbar, vclk, vin_d ;
parameter real vlogic_high = 5 ;
parameter real vlogic_low = 0 ;
parameter real vtrans_clk = 2.5 ;
parameter real vtrans = 2.5 ;
parameter real tdel = 3u from [0:inf) ;
parameter real trise = 1u from (0:inf) ;
parameter real tfall = 1u from (0:inf) ;
integer x ;
analog begin
    @ (cross( V(vclk) - vtrans_clk, +1 )) x = (V(vin_d) > vtrans) ;
    V(vout_q) <+ transition( vlogic_high*x + vlogic_low!*x,tdel, trise, tfall ) ;
    V(vout_qbar) <+ transition( vlogic_high!*x + vlogic_low*x, tdel,
                                trise, tfall ) ;
end
endmodule
```

The following example illustrates a use of the `transition` filter that should be avoided. The expression is dependent on a continuous signal and, as a consequence, the filter runs slowly.

```
I(p, n) <+ transition(V(p, n)/out1, tdel, trise, tfall); // Do not do this.
```

However, you can use the following approach to implement the same behavior in a statement that runs much faster.

```
I(p, n) <+ V(p, n) * transition(1/out1, tdel, trise, tfall); // Do this instead.
```

## Slew Filter

Use the `slew` filter to control the rate of change of a waveform. A typical use for `slew` is generating continuous signals from piecewise continuous signals. For discrete signals, consider using the `transition` filter instead. See [“Transition Filter”](#) on page 151 for more information.

```
slew(input [ , max_pos_rate [ , max_neg_rate ] ] )
```

*input* is a dynamic expression with a real value. In DC analysis, the `slew` filter simply returns the value of *input*.


*max\_pos\_rate* is a dynamic real number greater than zero, which is the maximum positive slew rate.

*max\_neg\_rate* is a dynamic real number less than zero, which is the maximum negative slew rate.

If you specify only one rate, its absolute value is used for both rates. If you give no rates, *slew* passes the signal through unchanged. If the rate of change of *input* is less than the specified maximum slew rates, *slew* returns the value of *input*.

The *slew* filter is subject to the restrictions listed in [“Restrictions on Using Analog Operators”](#) on page 144.

When applied, *slew* forces all transitions of *expr* faster than *max\_pos\_rate* to change at the *max\_pos\_rate* rate for positive transitions and limits negative transitions to the *max\_neg\_rate* rate.

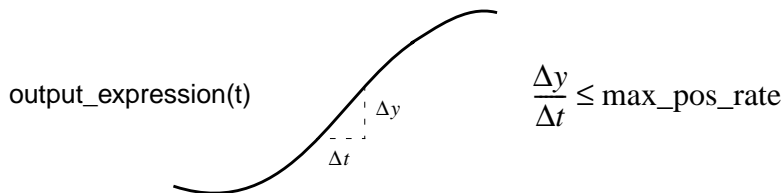

The *slew* filter is particularly valuable for controlling the rate of change of sinusoidal waveforms. The *transition* function distorts such signals, whereas *slew* preserves the general shape of the waveform. The following 4-bit digital-to-analog converter uses the *slew* function to control the rate of change of the analog signal at its output.

```
module dac4(d, out) ;
input [0:3] d ;
inout out ;
electrical [0:3] d ;
electrical out ;
parameter real slewrate = 0.1e6 from (0:inf) ;

    real Ti ;
    real Vref ;
    real scale_fact ;
    analog begin
        Ti = 0 ;
        Vref = 1.0 ;
        scale_fact = 2 ;
        generate ii (3,0,-1) begin
            Ti = Ti + ((V(d[ii]) > 2.5) ? (1.0/scale_fact) : 0);
            scale_fact = scale_fact/2 ;
        end
        V(out) <+ slew( Ti*Vref, slewrate ) ;
    end
endmodule
```

## Implementing Laplace Transform S-Domain Filters

The Laplace transform filters implement lumped linear continuous-time filters. Each filter accepts an optional absolute tolerance parameter  $\epsilon$ , which this release of Verilog-A ignores. The set of array values that are used to define the poles and zeros, or numerator and denominator, of a filter the first time it is used during an analysis are used at all subsequent time points of the analysis. As a result, changing array values during an analysis has no effect on the filter.

The Laplace transform filters are subject to the restrictions listed in [“Restrictions on Using Analog Operators”](#) on page 144. However, while most analog functions can be used, with certain restrictions, in `if` or `case` constructs, the Laplace transform filters cannot be used in `if` or `case` constructs in any circumstances.

### ***Arguments Represented as Vectors***

If you use an argument represented as a vector to define a numerator in a Laplace filter, and if one or more of the elements in the vector are 0, the order of the numerator is determined by the *position* of the rightmost non-zero vector element. For example, in the following module, the order of the numerator, `nn`, is 1

```
module test(pin, nin, pout, nout);
  electrical pin, nin, pout, nout;
  real nn[0:2];
  real dd[0:2];
  analog begin
    @(initial_step) begin
      nn[0] = 1; // The highest order non-zero coefficient of the numerator.
      nn[1] = 0;
      nn[2] = 0;
      dd[0] = 1;
      dd[1] = 1;
      dd[2] = 1;
    end
    V(pout, nout) <+ laplace_nd(V(pin,nin), nn, dd);
  end
endmodule
```

### ***Arguments Represented as Arrays***

If you use an argument represented as an array constant to define a numerator in a Laplace filter, and if one or more of the elements in the array constant are 0, the order of the numerator is determined by the *position* of the rightmost non-zero array element. For example, if your numerator array constant is `{1,0,0}`, the order of the numerator is 1. If your array constant is `{1,0,1}`, the order of the numerator is 3. In the following example, the numerator order is 1 (and the value is 1).

```
module test(pin, nin, pout, nout);
  electrical pin, nin, pout, nout;
  analog begin
    V(pout, nout) <+ laplace_nd(V(pin,nin), {1,0,0}, {1,1,1});
  end
endmodule
```

Array literals used for the Laplace transforms can also take the form that uses a back tic. For example,

```
V(out) <+ laplace_nd(`{5,6}, `{7.8,9.0});
```

## Zero-Pole Laplace Transforms

Use `laplace_zp` to implement the zero-pole form of the Laplace transform filter.

```
laplace_zp(expr,  $\zeta$ ,  $\rho$  [,  $\varepsilon$ ])
```

$\zeta$  (zeta) is a fixed-sized vector of M pairs of real numbers. Each pair represents a zero. The first number in the pair is the real part of the zero, and the second is the imaginary part.  $\rho$  (rho) is a fixed-sized vector of N real pairs, one for each pole. Specify the poles in the same manner as the zeros. If you use array literals to define the  $\zeta$  and  $\rho$  vectors, the values must be constant or dependent upon parameters only. You cannot use array literal values defined by variables.

The transfer function is

$$H(s) = \frac{\prod_{k=0}^{M-1} \left( 1 - \frac{s}{\zeta_k^r + j\zeta_k^i} \right)}{\prod_{k=0}^{N-1} \left( 1 - \frac{s}{\rho_k^r + j\rho_k^i} \right)}$$

where  $\zeta_k^r$  and  $\zeta_k^i$  are the real and imaginary parts of the  $k^{th}$  zero, and  $\rho_k^r$  and  $\rho_k^i$  are the real and imaginary parts of the  $k^{th}$  pole.

If a root (a pole or zero) is real, you must specify the imaginary part as 0. If a root is complex, its conjugate must be present. If a root is zero, the term associated with it is implemented as  $s$  rather than  $(1 - s/r)$ , where  $r$  is the root. If the list of roots is empty, unity is used for the corresponding denominator or numerator.

## Zero-Denominator Laplace Transforms

Use `laplace_zd` to implement the zero-denominator form of the Laplace transform filter.

`laplace_zd(expr, ζ, d[, ε])`

ζ (zeta) is a fixed-sized vector of M pairs of real numbers. Each pair represents a zero. The first number in the pair is the real part of the zero, and the second is the imaginary part. *d* is a fixed-sized vector of N real numbers that contains the coefficients of the denominator. If you use array literals to define the ζ and *d* vectors, the values must be constant or dependent upon parameters only. You cannot use array literal values defined by variables.

The transfer function is

$$H(s) = \frac{\prod_{k=0}^{M-1} \left( 1 - \frac{s}{\zeta_k^r + j\zeta_k^i} \right)}{\sum_{k=0}^{N-1} d_k s^k}$$

where  $\zeta_k^r$  and  $\zeta_k^i$  are the real and imaginary parts of the  $k^{th}$  zero, and  $d_k$  is the coefficient of the  $k^{th}$  power of  $s$  in the denominator. If a zero is real, you must specify the imaginary part as 0. If a zero is complex, its conjugate must be present. If a zero is zero, the term associated with it is implemented as  $s$  rather than  $(1 - s/\zeta)$ .

### Numerator-Pole Laplace Transforms

Use `laplace_np` to implement the numerator-pole form of the Laplace transform filter.

`laplace_np(expr, n, ρ[, ε])`

*n* is a fixed-sized vector of M real numbers that contains the coefficients of the numerator. ρ (rho) is a fixed-sized vector of N pairs of real numbers. Each pair represents a pole. The first number in the pair is the real part of the pole, and the second is the imaginary part. If you use array literals to define the *n* and ρ vectors, the array values must be constant or dependent upon parameters only. You cannot use array values defined by variables.

The transfer function is

$$H(s) = \frac{\sum_{k=0}^{M-1} n_k s^k}{\prod_{k=0}^{N-1} \left( 1 - \frac{s}{\rho_k^r + j\rho_k^i} \right)}$$

where  $n_k$  is the coefficient of the  $k^{th}$  power of  $s$  in the numerator, and  $\rho_k^r$  and  $\rho_k^i$  are the real and imaginary parts of the  $k^{th}$  pole. If a pole is real, you must specify the imaginary part as 0. If a pole is complex, its conjugate must be present. If a pole is zero, the term associated with it is implemented as  $s$  rather than  $(1 - s/\rho)$ .

## Numerator-Denominator Laplace Transforms

Use `laplace_nd` to implement the numerator-denominator form of the Laplace transform filter.

`laplace_nd(expr, n, d[, ε])`

$n$  is a fixed-sized vector of  $M$  real numbers that contains the coefficients of the numerator, and  $d$  is a fixed-sized vector of  $N$  real numbers that contains the coefficients of the denominator. If you use array literals to define the  $n$  and  $d$  vectors, the values must be constant or dependent upon parameters only. You cannot use array values defined by variables.

The transfer function is

$$H(s) = \frac{\sum_{k=0}^M n_k s^k}{\sum_{k=0}^N d_k s^k}$$

where  $n_k$  is the coefficient of the  $k^{th}$  power of  $s$  in the numerator, and  $d_k$  is the coefficient of the  $k^{th}$  power of  $s$  in the denominator.

## Examples

The following code fragments illustrate how to use the Laplace transform filters.

```
V(out) <+ laplace_zp(V(in), {0,0}, {1,2,1,-2});
```

implements

$$H(s) = \frac{s}{\left(1 - \frac{s}{1+2j}\right)\left(1 - \frac{s}{1-2j}\right)} = \frac{s}{1 - 0.4s + 0.2s^2}$$

The code fragment

```
V(out) <+ laplace_nd(V(in), {0,1}, {1,-0.4,0.2});
```

is equivalent.

The following statement contains an empty vector:

```
V(out) <+ laplace_zp(V(in), {}, {-1,0});
```

The absence of zeros, indicated by the empty brackets, means that the transfer function reduces to the following equation.

$$H(s) = \frac{1}{1+s}$$

The next module illustrates the use of array literals that depend on parameters. In this code, the array literal {dx, 6\*dx, 5\*dx} depends on the value of the parameter dx.

```
module svcvs_zd(pin, nin, pout, nout);
electrical pin, nin, pout, nout;
parameter real nx = 0.5;
parameter integer dx = 1;
analog begin
    V(pout,nout) <+ laplace_zd(V(pin,nin), {0-nx,0}, {dx,6*dx,5*dx});
end
endmodule
```

The next fragment illustrates an efficient way to initialize array values. Because only the initial set of array values used by a filter has any effect, this example shows how you can use the `initial_step` event to set values at the beginning of the specified analyses.

```
real nn[0:1] ;
real dd[0:2] ;
analog begin
    @(initial_step("static")) begin
        nn[0] = 1 ;           // These assignment
        nn[1] = 2 ;           // statements run only
        dd[0] = 1 ;           // at the beginning of
        dd[1] = 6 ;           // the analyses.
    end
    V(pout, nout) <+ laplace_nd(V(pin,nin), nn, dd) ;
end
```

When you use this technique, be sure to initialize the arrays at the beginning of each analysis that uses the filter. The `static` analysis is the dc operating point calculation required by most analyses, including `tran`, `ac`, and `noise`. Initializing the array during the `static` phase ensures that the array is non-zero as these analyses proceed.

The next modules illustrate how you can use an array variable to avoid error messages about using array literals with variable dependencies in the Laplace filters. The first version causes an error message.

```
// This version does not work.
`include "constants.vams"
`include "disciplines.vams"
```



## Cadence Verilog-A Language Reference

### Simulator Functions

---

```
module laplace(out, in);
inout in, out;
electrical in, out;
real dummy;

    analog begin
        dummy = -0.5;
        V(out) <+ laplace_zd(V(in), [dummy,0], [1,6,5]);    //Illegal!
    end
endmodule
```

The next version works as expected.

```
// This version works correctly.
`include "constants.vams"
`include "disciplines.vams"

module laplace(out, in);
inout in, out;
electrical in, out;
real dummy;

real nn[0:1];

analog begin
    dummy = -0.5;
    @(initial_step) begin    // Defines the array variable.
        nn[0] = dummy;
        nn[1] = 0;
    end
    V(out) <+ laplace_zd(V(in), nn, [1,6,5]);
end
endmodule
```

## Implementing Z-Transform Filters

The Z-transform filters implement linear discrete-time filters. Each filter requires you to specify a parameter  $T$ , the sampling period of the filter. A filter with unity transfer function acts like a simple sample-and-hold that samples every  $T$  seconds.

All Z-transform filters share three common arguments,  $T$ ,  $\tau$ , and  $t_0$ . The  $T$  argument specifies the period of the filter and must be positive.  $\tau$  specifies the transition time and must be nonnegative. If you specify a nonzero transition time, the simulator controls the time step to accurately resolve both the leading and trailing corner of the transition. If you do not specify a transition time,  $\tau$  defaults to one unit of time as defined by the ``default_transition` compiler directive. If you specify a transition time of 0, the output is abruptly discontinuous. Avoid assigning a Z-filter with 0 transition time directly to a branch because doing so greatly slows the simulation. Finally,  $t_0$  specifies the time of the first sample/transition and is also optional. If not given, the first transition occurs at  $t=0$ .

The values of  $T$  and  $t_0$  at the first time point in the analysis are stored, and those stored values are used at all subsequent time points. The array values used to define a filter are used at all

subsequent time points, so changing array values during an analysis has no effect on the filter.

The Z-transform filters are subject to the restrictions listed in [“Restrictions on Using Analog Operators”](#) on page 144.

In small-signal analyses, the Z-transform filters phase-shift *input* according to the following formula.

$$output(\omega) = H(e^{j\omega T}) \cdot input(\omega)$$

### Zero-Pole Z-Transforms

Use `zi_zp` to implement the zero-pole form of the Z-transform filter.

`zi_zp(expr, ζ, ρ, T [ , τ [ , t0 ] ])`

ζ (zeta) is a fixed or parameter-sized vector of M pairs of real numbers. Each pair represents a zero. The first number in the pair is the real part of the zero, and the second is the imaginary part. ρ (rho) is a fixed or parameter-sized vector of N real pairs, one for each pole. The poles are given in the same manner as the zeros. If you use array literals to define the ζ and ρ vectors, the values must be constant or dependent upon parameters only. You cannot use array values defined by variables.

The transfer function is

$$H(z) = \frac{\prod_{k=0}^{M-1} \left(1 - z^{-1}(\zeta_k^r + j\zeta_k^i)\right)}{\prod_{k=0}^{N-1} \left(1 - z^{-1}(\rho_k^r + j\rho_k^i)\right)}$$

where  $\zeta_k^r$  and  $\zeta_k^i$  are the real and imaginary parts of the  $k^{th}$  zero, and  $\rho_k^r$  and  $\rho_k^i$  are the real and imaginary parts of the  $k^{th}$  pole. If a root (a pole or zero) is real, you must specify the imaginary part as 0. If a root is complex, its conjugate must also be present. If a root is the origin, the term associated with it is implemented as  $z$  rather than  $(1 - (z^{-1} \cdot r))$ , where  $r$  is the root. If a list of poles or zeros is empty, unity is used for the corresponding denominator or numerator.

## Zero-Denominator Z-Transforms

Use `zi_zd` to implement the zero-denominator form of the Z-transform filter.

`zi_zd(expr, ζ, d, T[, τ[, t0] ])`

$\zeta$  (zeta) is a fixed or parameter-sized vector of M pairs of real numbers. Each pair represents a zero. The first number in the pair is the real part of the zero, and the second is the imaginary part.  $d$  is a fixed or parameter-sized vector of N real numbers that contains the coefficients of the denominator. If you use array literals to define the  $\zeta$  and  $d$  vectors, the values must be constant or dependent upon parameters only. You cannot use array values defined by variables.

The transfer function is

$$H(z) = \frac{\prod_{k=0}^{M-1} \left(1 - z^{-1}(\zeta_k^r + j\zeta_k^i)\right)}{\sum_{k=0}^{N-1} d_k z^{-k}}$$

where  $\zeta_k^r$  and  $\zeta_k^i$  are the real and imaginary parts of the  $k^{th}$  zero, and  $d_k$  is the coefficient of the  $k^{th}$  power of  $z$  in the denominator. If a zero is real, you must specify the imaginary part as 0. If a zero is complex, its conjugate must also be present. If a zero is the origin, the term associated with it is implemented as  $z$  rather than  $(1 - (z^{-1} \cdot \zeta))$ .

## Numerator-Pole Z-Transforms

Use `zi_np` to implement the numerator-pole form of the Z-transform filter.

`zi_np(expr, n, ρ, T[, τ[, t0] ])`

$n$  is a fixed or parameter-sized vector of M real numbers that contains the coefficients of the numerator.  $\rho$  (rho) is a fixed or parameter-sized vector of N pairs of real numbers. Each pair represents a pole. The first number in the pair is the real part of the pole, and the second is the imaginary part. If you use array literals to define the  $n$  and  $\rho$  vectors, the values must be constant or dependent upon parameters only. You cannot use array values defined by variables.

The transfer function is

$$H(z) = \frac{\sum_{k=0}^{M-1} n_k z^{-k}}{\prod_{k=0}^{N-1} (1 - z^{-1}(\rho_k^r + j\rho_k^i))}$$

where  $n_k$  is the coefficient of the  $k^{th}$  power of  $z$  in the numerator, and  $\rho_k^r$  and  $\rho_k^i$  are the real and imaginary parts of the  $k^{th}$  pole. If a pole is real, the imaginary part must be specified as 0. If a pole is complex, its conjugate must also be present. If a pole is the origin, the term associated with it is implemented as  $z$  rather than  $(1 - z^{-1}\rho)$ .

### Numerator-Denominator Z-Transforms

Use `zi_nd` to implement the numerator-denominator form of the Z-transform filter.

`zi_nd(expr, n, d, T [ ,  $\tau$  [ ,  $t_0$  ] ])`

$n$  is a fixed or parameter-sized vector of  $M$  real numbers that contains the coefficients of the numerator, and  $d$  is a fixed or parameter-sized vector of  $N$  real numbers that contains the coefficients of the denominator. If you use array literals to define the  $n$  and  $d$  vectors, the values must be constant or dependent upon parameters only. You cannot use array values defined by variables.

The transfer function is

$$H(z) = \frac{\sum_{k=0}^{M-1} n_k z^{-k}}{\sum_{k=0}^{N-1} d_k z^{-k}}$$

where  $n_k$  is the coefficient of the  $k^{th}$  power of  $z$  in the numerator, and  $d_k$  is the coefficient of the  $k^{th}$  power of  $s$  in the denominator.

### Examples

The following example illustrates an ideal sampled data integrator with the transfer function

$$H(z) = \frac{1}{1 - z^{-1}}$$

This transfer function can be implemented as

```
module ideal_int (in, out) ;
electrical in, out ;
parameter real T = 0.1m ;
parameter real tt = 0.02n ;
parameter real td = 0.04m ;
analog begin
    // The filter is defined with constant array literals.
    V(out) <+ zi_nd(V(in), {1}, {1,-1}, T, tt, td) ;
end
endmodule
```

The next example illustrates additional ways to use parameters and arrays to define filters.

```
module zi (in, out);
electrical in, out;

parameter real T = 0.1;
parameter real tt = 0.02m;
parameter real td = 0.04m;
parameter real n0 = 1;

parameter integer start_num = 0;
parameter integer num_d = 2;

real nn[0:0];           // Fixed-sized array
real dd[start_num:start_num+num_d-1]; // Parameter-sized array
real d;

analog begin
    // The arrays are initialized at the beginning of the listed analyses.
    @(initial_step("ac","dc","tran")) begin
        d = 1*n0;
        nn[start_num] = n0;
        dd[start_num] = d; dd[1] = -d;
    end
    V(out) <+ zi_nd( V(in), nn, dd, T, tt, td);
end
endmodule
```

## Displaying Results

Verilog-A provides these tasks for displaying information: \$strobe, \$display, \$write, and \$debug.

## **\$strobe**

Use the `$strobe` task to display information on the screen. `$strobe` and `$display` use the same arguments and are completely interchangeable. `$strobe` is supported in both analog and digital contexts.

```
strobe_task ::=  
    $strobe [ ( { list_of_arguments } ) ]  
list_of_arguments ::=  
    argument  
    | list_of_arguments , argument
```

The `$strobe` task prints a new-line character after the final argument. A `$strobe` task without any arguments prints only a new-line character.

Each *argument* is a quoted string or an expression that returns a value.

Each quoted string is a set of ordinary characters, special characters, or conversion specifications, all enclosed in one set of quotation marks. Each conversion specification in the string must have a corresponding argument following the string. You must ensure that the type of each argument is appropriate for the corresponding conversion specification.

You can specify an argument without a corresponding conversion specification. If you do, an integer argument is displayed using the `%d` format, and a real argument is displayed using the `%g` format.

## **Special Characters**

Use the following sequences to include the specified characters and information in a quoted string.

---

<b>Use this sequence</b>	<b>To include</b>
<code>\n</code>	The new-line character
<code>\t</code>	The tab character
<code>\\</code>	The backslash character, <code>\</code>
<code>\"</code>	The quotation mark character, <code>"</code>
<code>\ddd</code>	A character specified by 1 to 3 octal digits
<code>%%</code>	The percent character, <code>%</code>
<code>%m</code> or <code>%M</code>	The hierarchical name of the current module, function, or named block

---

## Cadence Verilog-A Language Reference

### Simulator Functions

#### Conversion Specifications

Conversion specifications have the form

`% [ flag ] [ field_width ] [ . precision ] format_character`

where *flag*, *field\_width*, and *precision* can be used only with a real argument.

*flag* is one of the three choices shown in the table:

flag	Meaning
-	Left justify the output
+	Always print a sign
Blank space, or any character other than a sign	Print a space

*field\_width* is an integer specifying the minimum width for the field.

*precision* is an integer specifying the number of digits to the right of the decimal point.

*format\_character* is one of the following characters.

format_ character	Type of Argument	Output	Example Output
b or B		Binary format	0000000000000000 000000000111000
c or C	Integer	ASCII character format	
d or D	Integer	Decimal format	191, 48, -567
e or E	Real	Real, exponential format	-1.0, 4e8, 34.349e-12
f or F	Real	Real, fixed-point format	191.04, -4.789
g or G	Real	Real, exponential, or decimal format, whichever format results in the shortest printed output	9.6001, 7.34E-8, -23.1E6
h or H	Integer	Hexadecimal format	3e, 262, a38, fff, 3E, A38
o or O	Integer	Octal format	127, 777

## Cadence Verilog-A Language Reference

### Simulator Functions

format_ character	Type of Argument	Output	Example Output
r or R	Real	Engineering notation format	123,457M, 12.345K
s or S	String constant	String format	

### Examples of \$strobe Formatting

Assume that module `format_module` is instantiated in a netlist file with the instantiation

```
formatTest format_module
```

The module is defined as

```
module format_module ;
integer ival ;
real rval ;
analog begin
    ival = 98 ;
    rval = 123.456789 ;
    $strobe("Format c gives %c" , ival) ;
    $strobe("Format C gives %C" , ival) ;
    $strobe("Format d gives %d" , ival) ;
    $strobe("Format D gives %D" , ival) ;
    $strobe("Format e (real) gives %e" , rval) ;
    $strobe("Format E (real) gives %E" , rval) ;
    $strobe("Format f (real) gives %f" , rval) ;
    $strobe("Format F (real) gives %F" , rval) ;
    $strobe("Format g (real) gives %g" , rval) ;
    $strobe("Format G (real) gives %G" , rval) ;
    $strobe("Format h gives %h" , ival) ;
    $strobe("Format H gives %H" , ival) ;
    $strobe("Format m gives %m" ) ;
    $strobe("Format M gives %M" ) ;
    $strobe("Format o gives %o" , ival) ;
    $strobe("Format O gives %O" , ival) ;
    $strobe("Format s gives %s" , "s string") ;
    $strobe("Format S gives %S" , "S string") ;
    $strobe("newline,\ntab,\tback-slash, \\") ;
    $strobe("doublequote,\"") ;
end
endmodule
```

When you run `format_module`, it displays

```
Format c gives b
Format C gives b
Format d gives 98
Format D gives 98
Format e gives 1.234568e+02
Format E gives 1.234568e+02
Format f gives 123.456789
Format F gives 123.456789
```



```
Format g gives 123.457
Format G gives 123.457
Format h gives 62
Format H gives 62
Format m gives formatTest
Format M gives formatTest
Format o gives 142
Format O gives 142
Format s gives s string
Format S gives S string
newline,
tab,      back-slash, \
doublequote,"
```

### **\$display**

Use the `$display` task to display information on the screen. `$display` is supported in both analog and digital contexts.

```
display_task ::=
    $display [ ( { list_of_arguments } ) ]
list_of_arguments ::=
    argument
    | list_of_arguments , argument
```

`$display` and `$strobe` use the same arguments and are completely interchangeable. For guidance, see “[\\$strobe](#)” on page 166.

### **\$write**

Use the `$write` task to display information on the screen. This task is identical to the `$strobe` task, except that `$strobe` automatically adds a newline character to the end of its output, whereas `$write` does not. `$write` is supported in both analog and digital contexts.

```
write_task ::=
    $write [ ( { list_of_arguments } ) ]
list_of_arguments ::=
    argument
    | list_of_arguments , argument
```

The arguments you can use in `list_of_arguments` are the same as those used for `$strobe`. For guidance, see “[\\$strobe](#)” on page 166.

### **\$debug**

Use the `$debug` task to display information on the screen while the analog solver is running. This task displays the values of the arguments for each iteration of the solver.

```
debug_task ::=  
    $debug [ ( { list_of_arguments } ) ]  
list_of_arguments ::=  
    argument  
    | list_of_arguments , argument
```

The arguments you can use in `list_of_arguments` are the same as those used for `$strobe`. For guidance, see “[\\$strobe](#)” on page 166.

## Specifying Power Consumption

Use the `$pwr` system task to specify the power consumption of a module. The `$pwr` task is supported in only analog contexts.

**Note:** The `$pwr` task is a nonstandard Cadence-specific language extension.

```
pwr_task ::=  
    $pwr( expression )
```

*expression* is an expression that specifies the power contribution. If you specify more than one `$pwr` task in a behavioral description, the result of the `$pwr` task is the sum of the individual contributions.

To ensure a useful result, your module must contain an assignment inside the behavior specification. Your module must also compute the value of `$pwr` tasks at every iteration. If these conditions are not met, the result of the `$pwr` task is zero.

The `$pwr` task does not return a value and cannot be used inside other expressions. Instead, access the result by using the `options` and `save` statements in the netlist. For example, using the following statement in the netlist saves all the individual power contributions and the sum of the contributions in the module named *name*:

```
name options pwr=all
```

For `save`, use a statement like the following:

```
save name:pwr
```

In each format, *name* is the name of a module.

For more information about the `options` statement, see [Chapter 7](#) of the *Spectre Circuit Simulator User Guide*. For more about the `save` statement, see [Chapter 8](#) of the *Spectre Circuit Simulator User Guide*.

### Example

```
// Resistor with power contribution  
'include "disciplines.vams"
```

```
module Res(pos, neg);
inout pos, neg;
electrical pos, neg;
parameter real r=5;
    analog begin
        V(pos,neg) <+ r * I(pos,neg);
        $pwr(V(pos,neg)*I(pos,neg));
    end
endmodule
```

## Working with Files

Verilog-A provides several functions for working with files. `$fopen` prepares a file for writing. `$fstrobe` and `$fdisplay` write to a file. `$fclose` closes an open file.

### Opening a File

Use the `$fopen` function to open a specified file.

```
fopen_function ::=
    multi_channel_descriptor = $fopen ( "file_name" [ "io_mode" ] ) ;
```

*multi\_channel\_descriptor* is a 32-bit unsigned integer that is uniquely associated with *file\_name*. The `$fopen` function returns a *multi\_channel\_descriptor* value of zero if the file cannot be opened.

Think of *multi\_channel\_descriptor* as a set of 32 flags, where each flag represents a single output channel. The least significant bit always refers to the standard output. The first time it is called, `$fopen` opens channel 1 and returns a descriptor value of 2 (binary 10). The second time it is called, `$fopen` opens channel 2 and returns a descriptor value of 4 (binary 100). Subsequent calls cause `$fopen` to open channels 3, 4, 5, and so on, and to return values of 8, 16, 32, and so on, up to a maximum of 32 open channels.

*io\_mode* is one of three possible values: *w*, *a*, or *r*. The *w* or write mode deletes the contents of any existing files before writing to them. The *a* or append mode appends the next output to the existing contents of the specified file. In both cases, if the specified file does not exist, `$fopen` creates that file. The *r* mode opens a file for reading. An error is reported if the file does not exist.

The `$fopen` function reuses channels associated with any files that are closed.

*file\_name* is a string that can include the special commands described in “[Special \\$fopen Formatting Commands](#)” on page 172. If *file\_name* contains a path indicating that the file is to be opened in a different directory, the directory must already exist when the `$fopen` function runs. *file\_name* (together with the surrounding quotation marks) can also be replaced by a string parameter.

## Cadence Verilog-A Language Reference

### Simulator Functions

---

For example, to open a file named `myfile`, you can use the code

```
integer myChanDesc ;  
myChanDesc = $fopen ( "myfile" ) ;
```

### Special \$fopen Formatting Commands

The following special output formatting commands are available for use with the `$fopen` function.

---

Command	Output	Example
%C	Design filename	input.scs
%D	Date (yy-mm-dd)	94-02-28
%H	Host name	hal
%S	Simulator type	spectre
%P	Unix process ID #	3641
%T	Time (24hh:mm:ss)	15:19:25
%I	Instance name	opamp3
%A	Analysis name	dc0p, timeDomain, acSup

---

The special output formatting commands can be followed by one or more modifiers, which extract information from UNIX filenames. (To avoid opening a file that is already open, the %C command must be followed by a modifier.) The modifiers are:

---

Modifier	Extracted information
:r	Root (base name) of the path for the file
:e	Extension of the path for the file
:h	Head of the path for any portion of the file before the last /
:t	Tail of the path for any portion of the file after the last /
::	The (:) character itself

---

Any other character after a colon (:) signals the end of modifications. That character is copied with the previous colon.

## Cadence Verilog-A Language Reference

### Simulator Functions

---

The modifiers are typically used with the `%C` command although they can be used with any of the commands. However, when the output of a formatting command does not contain a `/` and `.`, the modifiers `:t` and `:r` return the whole name and the `:e` and `:h` modifiers return `.`. As a result, be aware that using modifiers with formatting commands other than `%C` might not produce the results you expect. For example, using the command

```
$fopen("%I:h.freq_dat") ;
```

opens a file named `..freq_dat`.

You can use a concatenated sequence of modifiers. For example, if your design file name is `res.ckt`, and you use the statement

```
$fopen("%C:r.freq_dat") ;
```

then

- `%C` is the design filename (`res.ckt`)
- `:r` is the root of the design filename (`res`)
- `.freq_dat` is the new filename extension

As a result, the name of the opened file is `res.freq_dat`.

The following table shows the various filenames generated from a design filename (`%C`) of `/users/maxwell/circuits/opamp.ckt`

by using different formatting commands and modifiers.

---

Command and Modifiers	Resulting Opened File
<code>\$fopen("%C") ;</code>	None, because the design file cannot be overwritten.
<code>\$fopen("%C:r") ;</code>	<code>/users/maxwell/circuits/opamp</code>
<code>\$fopen("%C:e") ;</code>	<code>ckt</code>
<code>\$fopen("%C:h") ;</code>	<code>/users/maxwell/circuits</code>
<code>\$fopen("%C:t") ;</code>	<code>opamp.ckt</code>
<code>\$fopen("%C::") ;</code>	<code>/users/maxwell/circuits/opamp.ckt:</code>
<code>\$fopen("%C:h:h") ;</code>	<code>/users/maxwell</code>
<code>\$fopen("%C:t:r") ;</code>	<code>opamp</code>
<code>\$fopen("%C:r:t") ;</code>	<code>opamp</code>
<code>\$fopen("/tmp/%C:t:r.raw") ;</code>	<code>/tmp/opamp.raw</code>

## Cadence Verilog-A Language Reference

### Simulator Functions

---

#### Command and Modifiers

#### Resulting Opened File

---

<code>\$fopen( "%C:e%C:r:t" );</code>	<code>ckt.opamp</code>
<code>\$fopen( "%C:r.%I.dat" );</code>	<code>/users/maxwell/circuits/ opamp.opamp3.dat</code>

---

## Reading from a File

Use the `$fscanf` function to read information from a file.

```
fscanf_function ::=  
    $fscanf (multi_channel_descriptor , "format" { , storage_arg } )
```

The *multi\_channel\_descriptor* that you specify must have a value that is associated with one or more currently open files. The format describes the matching operation done between the `$fscanf` storage arguments and the input from the data file. The `$fscanf` function sequentially attempts to match each formatting command in this string to the input coming from the file. After the formatting command is matched to the characters from the input stream, the next formatting command is applied to the next input coming from the file. If a formatting command is not a skipping command, the data read from the file to match a formatting command is stored in the formatting command's corresponding *storage\_arg*. The first *storage\_arg* corresponds to the first nonskipping formatting command; the second *storage\_arg* corresponds to the second nonskipping formatting command. This matching process is repeated between all formatting commands and input data. The formatting commands that you can use are the same as those used for `$strobe`. See "[\\$strobe](#)" on page 166 for guidance.

For example, the following statement reads data from the file designated by `fptr1` and places the information in variables called `dbl` and `int`.

```
$fscanf(fptr1, "Double = %e and Integer = %d", dbl, int);
```

## Writing to a File

Verilog-A provides three input/output functions for writing to a file: `$fstrobe`, `$fdisplay`, and `$fwrite`. The `$fstrobe` and `$fdisplay` functions use the same arguments and are completely interchangeable. The `$fwrite` function is similar but does not insert automatic carriage returns in the output.

### **\$fstrobe**

Use the `$fstrobe` function to write information to a file.

## Cadence Verilog-A Language Reference

### Simulator Functions

---

```
fstrobe_function ::=
    $fstrobe (multi_channel_descriptor {,list_of_arguments })
list_of_arguments ::=
    argument
    | list_of_arguments , argument
```

The *multi\_channel\_descriptor* that you specify must have a value that is associated with one or more currently open files. The arguments that you can use in *list\_of\_arguments* are the same as those used for *\$strobe*. See “*\$strobe*” on page 166 for guidance.

For example, the following code fragment illustrates how you might write simultaneously to two open files.

```
integer mcd1 ;
integer mcd2 ;
integer mcd ;
@(initial_step) begin
    mcd1 = $fopen("file1.dat") ;
    mcd2 = $fopen("file2.dat") ;
end
.
.
.
mcd = mcd1 | mcd2 ; // Bitwise OR combines two channels
$fstrobe(mcd, "This is written to both files") ;
```

### **\$fdisplay**

Use the *\$fdisplay* function to write information to a file.

```
fdisplay_function ::=
    $fdisplay (multi_channel_descriptor {,list_of_arguments })
list_of_arguments ::=
    argument
    | list_of_arguments , argument
```

The *multi\_channel\_descriptor* that you specify must have a value that is associated with a currently open file. The arguments that you can use in *list\_of\_arguments* are the same as those used for *\$strobe*. See “*\$strobe*” on page 166 for guidance.

### **\$fwrite**

Use the *\$fwrite* function to write information to a file.

```
fwrite_function ::=
    $fwrite (multi_channel_descriptor {,list_of_arguments })
list_of_arguments ::=
    argument
    | list_of_arguments , argument
```

The *multi\_channel\_descriptor* that you specify must have a value that is associated with a currently open file. The arguments that you can use in *list\_of\_arguments* are the same as those used for *\$strobe*. See “*\$strobe*” on page 166 for guidance.

The *\$fwrite* function does not insert automatic carriage returns in the output.

## Closing a File

Use the *\$fclose* function to close a specified file.

```
file_close_function ::=  
    $fclose ( multi_channel_descriptor ) ;
```

The *multi\_channel\_descriptor* that you specify must have a value that is associated with the currently open file that you want to close.

## Exiting to the Operating System

Use the *\$finish* function to make the simulator exit and return control to the operating system.

```
finish_function ::=  
    $finish [( msg_level )] ;  
  
msg_level ::=  
    0 | 1 | 2
```

The *msg\_level* value determines which diagnostic messages print before control returns to the operating system. The default *msg\_level* value is 1.

---

<b>msg_level</b>	<b>Messages printed</b>
0	None
1	Simulation time and location
2	Simulation time, location, and statistics about the memory and CPU time used in the simulation

---

**Note:** In this release, the *\$finish* function always behaves as though the *msg\_level* value is 0, regardless of the value you actually use.

For example, to make the simulator exit, you might code

```
$finish ;
```



## Entering Interactive Tcl Mode

Use the `$stop` function to make the simulator enter interactive mode and display a Tcl prompt.

```
stop_function ::=
    $stop [( msg_level )] ;
msg_level ::=
    0 | 1 | 2
```

The `msg_level` value determines which diagnostic messages print before the simulator starts the interactive mode. The default `msg_level` value is 1.

msg_level	Messages printed
0	None
1	Simulation time and location
2	Simulation time, location, and statistics about the memory and CPU time used in the simulation

For example, to make the simulator go interactive, you might code

```
$stop ;
```

## User-Defined Functions

Verilog-A supports user-defined functions. By defining and using your own functions, you can simplify your code and enhance readability and reuse.

### Declaring an Analog User-Defined Function

To define an analog function, use this syntax:

```
analog_function_declaration ::=
    analog function [ type ] function_identifier ;
    function_item_declaration {function_item_declaration}
    statement
    endfunction

type ::=
    integer
    | real

function_item_declaration ::=
    input_declaration
    | block_item_declaration
```

## Cadence Verilog-A Language Reference

### Simulator Functions

---

```
block_item_declaration ::=  
    integer_declaration  
    | real_declaration
```

*type* is the type of the value returned by the function. The default value is `real`.

*statement* cannot include analog operators and cannot define module behavior. Specifically, *statement* cannot include

- `ddt` operator
- `idt` operator
- `idtmod` operator
- Access functions
- Contribution statements
- Event control statements
- Simulator library functions, except that you can include the functions in the next list

*statement* can include references to

- `$vt`
- `$vt(temp)`
- `$temperature`
- `$realtime`
- `$abstime`
- `analysis`
- `$strobe`
- `$display`
- `$write`
- `$fopen`
- `$fstrobe`
- `$fdisplay`
- `$fwrite`
- `$fclose`

## ■ All mathematical functions

You can declare local variables to be used in the function.

Each function you define must have at least one declared input. Each function must also assign a value to the implicitly defined internal variable with the same name as the function.

For example,

```
analog function real chopper ;
    input sw, in ; // The function has two declared inputs.
    real sw, in ;
//The next line assigns a value to the implicit variable, chopper.
    chopper = ((sw > 0) ? in : -in) ;
endfunction
```

The `chopper` function takes two variables, `sw` and `in`, and returns a real result. You can use the function in any subsequent function definition or in the module definition.

## Calling a User-Defined Analog Function

To call a user-defined analog function, use the following syntax.

```
analog_function_call ::=
    function_identifier ( expression { , expression } )
```

*function\_identifier* must be the name of a defined function. Each *expression* is evaluated by the simulator before the function runs. However, do not rely on having expressions evaluated in a certain order because the simulator is allowed to evaluate them in any order.

An analog function must not call itself, either directly or indirectly, because recursive functions are illegal. Analog function calls are allowed only inside of analog blocks.

The module `phase_detector` illustrates how the `chopper` function can be called.

```
module phase_detector(lo, rf, if0) ;
inout lo, rf, if0 ;
electrical lo, rf, if0 ;
parameter real gain = 1 ;

    function real chopper;
        input sw, in;
        real sw, in;
        chopper = ((sw > 0) ? in : -in);
    endfunction

analog
    V(if0) <+ gain * chopper(V(lo),V(rf)); //Call from within the analog block.
endmodule
```

## **Cadence Verilog-A Language Reference**

### **Simulator Functions**

---

---

## Instantiating Modules and Primitives

---

Chapter 2, “[Creating Modules](#),” discusses the basic structure of Cadence® Verilog®-A language modules. This chapter discusses how to instantiate Verilog-A modules within other modules. Module declarations cannot nest in one another; instead, you embed instances of modules in other modules. By embedding instances, you build a hierarchy extending from the instances of primitive modules up through the top-level modules.

For information about instantiating modules in Spectre® circuit simulator netlists, see [Appendix G, “Getting Ready to Simulate.”](#) For information about instantiating a Verilog-A module in a schematic or a schematic in a Verilog-A module, see “[Multilevel Hierarchical Designs](#)” on page 234.

The following sections discuss

- [Instantiating Verilog-A Modules](#) on page 182
- [Connecting the Ports of Module Instances](#) on page 184
- [Overriding Parameter Values in Instances](#) on page 185
- [Instantiating Analog Primitives](#) on page 188
- [Using Inherited Ports](#) on page 189
- [Using an m-factor \(Multiplicity Factor\)](#) on page 190

## Instantiating Verilog-A Modules

Use the following syntax to instantiate modules in other modules.

```
module_instantiation ::=
    module_or_paramset_id [ parameter_value_assignment ] instance_list
instance_list ::=
    module_instance { , module_instance } ;
module_instance ::=
    name_of_instance ( [ list_of_module_connections ] )
name_of_instance ::=
    module_instance_identifier
list_of_module_connections ::=
    ordered_port_connection { , ordered_port_connection }
ordered_port_connection ::=
    [ net_expression ]
net_expression ::=
    net_identifier
    | net_identifier [ constant_expression ]
    | net_identifier [ constant_range ]
constant_range ::=
    constant_expression : constant_expression
```


The `instance_list` expression is discussed in the following sections. The `parameter_value_assignment` expression is discussed in [“Overriding Parameter Values in Instances”](#) on page 185.

## Creating and Naming Instances

This section illustrates how to instantiate modules. Consider the following module, which describes a gain block that doubles the input voltage.

```
module vdoubler (in, out) ;
input in ;
output out ;
electrical in, out ;
analog
    V(out) <+ 2.0 * V(in) ;
endmodule
```

Two of these gain blocks are connected, with the output of the first becoming the input of the second. The schematic looks like this.



This higher-level component is described by module `vquad`, which creates two instances, named `vd1` and `vd2`, of module `vdoubler`. Module `vquad` also defines external ports corresponding to those shown in the schematic.

```
module vquad (qin, qout) ;
input qin ;
output qout ;
electrical qin, qout ;
wire aal ;
vdoubler vd1 (qin, aal) ;
vdoubler vd2 (aal, qout) ;
endmodule
```

## Mapping Instance Ports to Module Ports

When you instantiate a module, you must specify how the actual ports listed in the instance correspond to the formal ports listed in the defining module. Module `vquad`, in the previous example, uses an ordered list, where instance `vd1`'s first actual port name `qin` maps to `vdoubler`'s first formal port name `in`. Instance `vd1`'s second actual port name `aal` maps to `vdoubler`'s second formal port name, and so on.

### Mapping Ports with Ordered Lists

To use ordered lists to map actual ports listed in the instance to the formal ports listed in the defining module, ensure that the instance ports are in the same order as the defining module ports. For example, consider the following module `child` and the module `instantiator` that instantiates it.

```
module child (ina, inb, out) ;
input [0:3] ina ;
input inb ;
output out ;
electrical [0:3] ina ;
electrical inb ;
electrical out ;
endmodule


module instantiator (conin, conout) ;
input [0:6] conin ;
output conout ;
electrical [0:6] conin ;
electrical conout ;
child child1 (conin [1:4], conin [6], conout) ;
end module
```

You can tell from the order of port names in these modules that port `ina[0]` in module `child` maps to port `conin[1]` in instance `child1`. Similarly, port `inb` in `child` maps to port `conin[6]` in instance `child1`. Port `out` in `child` maps to port `conout` in instance `child1`.

## Connecting the Ports of Module Instances

Developing modules that describe components is an important step on the way to the overall goal of simulating a system. But an equally important step is combining those components together so that they represent the system as a whole. This section discusses how to connect module instances, using their ports, to describe the structure and behavior of the system you are modeling.

Consider again the modules `vdoubler` and `vquad`, which describe this schematic.




```
module vdoubler (in, out) ;  
  input in ;  
  output out ;  
  electrical in, out ;  
  analog  
    V(out) <+ 2.0 * V(in) ;  
endmodule  
  
module vquad (qin, qout) ;  
  input qin ;  
  output qout ;  
  electrical qin, qout ;  
  wire aal ;  
  vdoubler vd1 (qin, aal) ;  
  vdoubler vd2 (aal, qout) ;  
endmodule
```

This time, note how the module instantiation statements in `vquad` use port names to establish a connection between output port `aal` of instance `vd1` and input port `aal` of instance `vd2`.

Module instantiation statements like

```
vdoubler vd1 (qin, qout) ;  
vdoubler vd2 (qin, qout) ;
```

establish different connections. These statements describe a system where the gain blocks are connected in parallel, with this schematic.

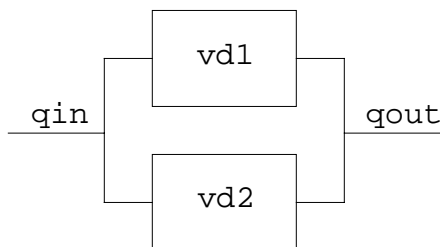



## Port Connection Rules

You can connect the ports described in the `vdoubler` instances because the ports are defined with compatible disciplines and are the same size. To generalize,

- You must ensure that all ports connected to a net are compatible with each other. Ports of any analog discipline are compatible with a reference node (ground). For a discussion of compatibility, see [“Compatibility of Disciplines”](#) on page 67.

You can connect the ports described in the `vdoubler` instances because the ports are defined with compatible disciplines and are the same size. To generalize,

- You must ensure that the sizes of connected ports and nets match. In other words, you can connect a scalar port to a scalar net, and a vector port to a vector net or concatenated net expression of the same width.

## Overriding Parameter Values in Instances

As noted earlier, the syntax for the module instantiation statement is

```
module_or_paramset_id [ parameter_value_assignment ] instance_list
```

The following sections discuss the `parameter_value_assignment` expression, which is further defined as

```
parameter_value_assignment ::=  
    | #( named_param_override_list )  
named_param_override_list ::=  
    named_param_override { , named_param_override }  
named_param_override ::=  
    . parameter_identifier ( expression )
```

By default, instances of modules inherit any parameters specified in their defining module. If you want to change any of the default parameter values, you do so on the module instantiation statement itself. You can also use paramsets, as described in [“Overriding Parameter Values by Using Paramsets”](#) on page 186.

## Overriding Parameter Values from the Instantiation Statement

Using the module instantiation statement, you can assign values to parameters by explicitly referring to parameter names. The new values must be constant expressions.

## Overriding Parameter Values By Name

You override parameter values in an instantiated module by pairing the parameter names to be changed with the values they are to receive. A period and the parameter name come first in each pair, followed by the new value in parentheses. The parameter name must be the name of a parameter in the defining module of the module being instantiated. When you override parameter values by name, you are not required to specify values for every parameter.

Consider this modified definition of module `vdoubler`. This version has three parameters, `parm1`, `parm2`, and `parm3`.

```
module vdoubler (in, out) ;
input in ;
output out ;
electrical in, out ;
parameter parm1 = 0.2,
           parm2 = 0.1,
           parm3 = 5.0 ;
analog
    V(out) <+ (parm1 + parm2 + parm3) * V(in) ;
endmodule

module vquad (qin, qout) ;
input qin ;
output qout ;
vdoubler # (.parm3(4.0)) vd1 (qin, aal) ;           // Overriding by name
vdoubler # (.parm1(0.3), .parm2(0.2)) vd2 (aal, qout) ; // Overriding by name
vdoubler # (.parm1(0.3), .parm2(0.2)) vd3 (aal, qout) ; // By name
endmodule
```

The module instantiation statement for instance `vd1` overrides parameter `parm3` by name to specify that the value for `parm3` should be changed to 4.0. The other two parameters retain the default values 0.2 and 0.1.

## Overriding Parameter Values by Using Paramsets

The syntax for creating paramsets is given in “[Paramsets](#)” on page 60. This section discusses how to use paramsets to override parameter values.

The syntax for module instantiation is

```
module_instantiation ::=
    module_or_paramset_id [ parameter_value_assignment ] instance_list
```

According to this syntax, the paramset can be instantiated instead of a module. Because the paramset references a module, all the information contained in the module is available. For example, consider the following module and paramset definitions.

```
module baseModule (in out);
inout in, out;
electrical in, out;
```

## Cadence Verilog-A Language Reference

### Instantiating Modules and Primitives

---

```
parameter real a = 0;
parameter real b = 0;
parameter real c = 0;
(* desc="output variable o1" *) real o1;
(* desc="output variable o2" *) real o2;
analog begin
    V(out) <+ (a+b+c)*V(in);
    baseOutput = a+b+c;
end
endmodule

paramset ps baseModule;
parameter real a = 1.0 from [0:1];
parameter real b = 1.0 from [0:1];
.a = a; .b = b;
endparamset

paramset ps baseModule;
parameter real b = 2.0 from [1:2];
parameter real c = 1.0 from [0:1];
.b = b; .c = c;
endparamset
```

Two paramsets named `ps` are defined, and, as required, both paramset declarations reference the same module, `baseModule`.

In the following code, the paramset is instantiated in place of the referenced module. For instance `inst1`, the simulator selects the second paramset named `ps`, because that paramset declares a range of `[1:2]` for the `b` value and instance `inst1` specifies a parameter `b` value of 1.5, which is included in that range.

```
// instantiation
ps #(.b(1.5) inst1 (in, out);
```

The value 1.5 for parameter `b` overrides the parameter value 0 specified in `baseModule`.

The simulator uses the following rules to choose a paramset from among those with the specified name:

- All parameters overridden on the instance must be parameters of the paramset.
- The parameters of the paramset, with overrides and defaults, must all be within the allowed ranges specified in the paramset parameter declaration.
- The local parameters of the paramset, computed from parameters, must be within the allowed ranges specified in the paramset.

If the preceding rules are not sufficient to pick a unique paramset, the following rules are applied in order until a unique paramset is selected:

1. The paramset that has the fewest number of un-overridden parameters is selected.
2. The paramset that has the greatest number of local parameters with specified ranges is selected.

It is an error if more than one applicable paramset remains for an instance after these rules are applied.

Instances of paramsets are allowed to override only parameters that are declared in the paramset. Using a paramset instance to attempt to override a parameter of the base module that is not declared in the paramset results in a warning and the offending parameter override is ignored.

## Instantiating Analog Primitives

The remaining sections of the chapter describe how to instantiate some analog primitives in your code. For more information, see the “Preparing the Design: Using Analog Primitives and Subcircuits” chapter of the *Virtuoso AMS Designer simulator User Guide*.

As you can instantiate Verilog-A modules in other Verilog-A modules, you can instantiate Spectre and SPICE masters in Verilog-A modules. You can also instantiate models and subcircuits in Verilog-A modules. For example, the following Verilog-A module instantiates two Spectre primitives: a resistor and an isource.

```
module ri_test (pwr, gnd) ;
electrical pwr, gnd ;
parameter real ibias = 10u, ampl = 1.0 ;
electrical in, out ;

    resistor #(.r(100K)) RL (out, pwr) ;           //Instantiate resistor
    isource #(.dc(ibias)) Iin (gnd, in) ;         //Instantiate isource

endmodule
```

When you connect a net of a discrete discipline to an analog primitive, the simulator automatically inserts a connect module between the two.

However, some instances require parameter values that are not directly supported by the Verilog-A language. The following sections illustrate how to set such values in the instantiation statement.

## Instantiating Analog Primitives that Use Array Valued Parameters

Some analog primitives take array valued parameters. For example, you might instantiate the `svcvs` primitive like this:

```
module fm_demodulator(vin, vout, vgnd) ;
input vin, vgnd ;
output vout ;
electrical vin, vout, vgnd ;
parameter real gain = 1 ;

    svcvs #(.gain(gain), .poles({-1M, 0, -1M, 0}))
    af_filter (vout, vgnd, vin, vgnd) ;
```

```
    analog begin
        ...
    end
endmodule
```

This `fm_demodulator` module sets the array parameter `poles` to a comma-separated list enclosed by a set of square brackets.

## Instantiating Modules that Use Unsupported Parameter Types

Spectre built-in primitives take parameter values that are not supported directly by the Verilog-A language. The following cases illustrate how to instantiate such modules.

To set a parameter that takes a string type value, set the value to a string constant. For example, the next fragment shows how you might set the `file` parameter of the `vsource` device.

```
vsource #(.type("pwl"), .file("mydata.dat")) V1(src,gnd);
```

To set an enumerated parameter in an instance of a Spectre built-in primitive, enclose the enumerated value in quotation marks. For example, the next fragment sets the parameter `type` to the value `pulse`.

```
vsource #(.type("pulse"),.val1(5),.period(50u)) Vclk(clk,gnd);
```

## Using Inherited Ports

The Cadence implementation of the Verilog-A language supports inherited terminals. Often, the inherited terminals arise from netlisting inherited ports in the Virtuoso Schematic Composer but you can also code inherited terminals by hand in a Verilog-A module.

The Cadence analog design environment translates the inherited terminals among the tools in the flow. For example, in the CIW, you select *File – New – Cellview* and create the following Verilog-A cellview.

```
// VerilogA for amslib, inv, veriloga
`include "constants.h"
`include "discipline.h"


module inv(out, gnd, vdd, in);
    output out;
    electrical out;

    (* inh_conn_prop_name = "gnd",
       inh_conn_def_value = "cds_globals.\\gnd!" *) inout gnd;

    electrical gnd;
    (* inh_conn_prop_name="vdd",
       inh_conn_def_value = "cds_globals.\\vdd! " *) inout vdd;
```

```
electrical vdd;  
input in;  
endmodule
```

When you save the module, you request the automatically generated symbol, which looks like this. The inherited terminal properties are automatically associated with the terminals in the symbol.

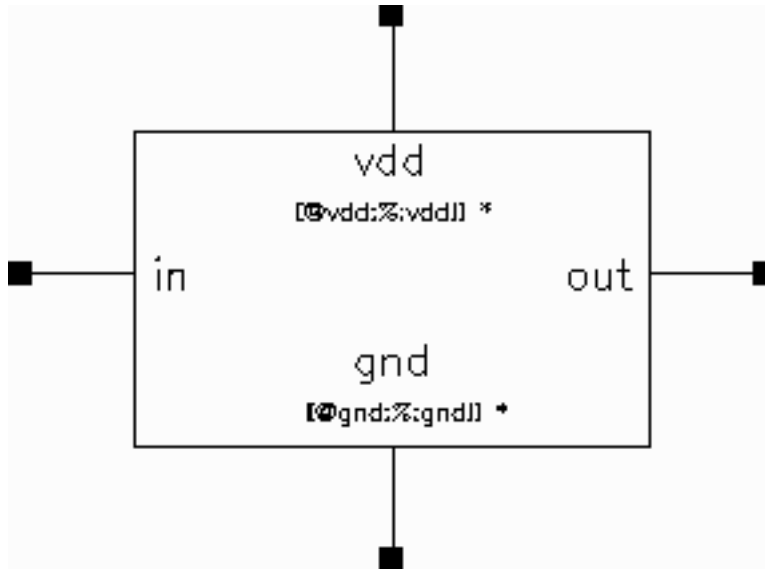

The inverse is also true. If you create a Verilog-A module from a symbol that contains inherited terminal information, the template for the new module contains the inherited terminal information.

Be aware that if you use Verilog-A without the environment, inherited terminals are not supported. Inherited nets and the netSet properties are not supported.

For more information, see the *Inherited Connections Flow Guide*.

## Using an m-factor (Multiplicity Factor)

An m-factor is a value that can be inherited down a hierarchy of instances. Circuit designers use m-factors to mimic parallel copies of identical devices without having to instantiate large sets of devices in parallel. The value of the inherited m-factor in a particular module instance is the product of the m-factor values in the ancestors of the instance and of the m-factor value in the instance itself. If there are no passed m-factors in the instance or in the ancestors of the instance, the value of the m-factor is one.

To enable m-factors in Verilog-A, the simulator supports a Cadence attribute called `inherited_mfactor`, which is used to access the value of the m-factor.

### Accessing an Inherited m-factor

To use an inherited m-factor, you use the `inherited_mfactor` attribute on a parameter declaration. Using this attribute on a parameter declaration sets the value of the parameter to the value of the m-factor inherited by the module.

For example, the following statement illustrates how to access an m-factor parameter called `m`.

```
(* inherited_mfactor *) parameter real m=1;
```

### Example: Using an m-factor

The following example illustrates how the m-factor value is the product of the m-factors in the current instance and in the ancestors of the current instance.

The following module is defined in a file called `mfactor_res.va`.

```
//
`include "discipline.h"
`include "constants.h"

module mf_res(vp, vn);
  inout vp, vn;
  electrical vp, vn;
  parameter real r=1;
  (* inherited_mfactor *) parameter real m=1;

  analog
    V(vp, vn) <+ r/m * I(vp, vn);
endmodule
```

## Cadence Verilog-A Language Reference

### Instantiating Modules and Primitives

---

Module `mf_res` is used in the following netlist.

```
//
simulator lang=spectre
i1 (0 1) isource dc=1
r1 (0 1) my_sub_1 r=1k m=2
i2 (0 2) isource dc=1
r2 (0 2) my_sub_4 r=1k m=2

subckt my_sub_1(a b)
parameters r=1
ra (a b) mf_res r=r
ends my_sub_1

subckt my_sub_2(a b)
parameters r=1
ra (a b) my_sub_1 r=r m=2
ends my_sub_2

subckt my_sub_4(a b)
parameters r=1
ra (a b) my_sub_2 r=r m=2
ends my_sub_4

ahdl_include "mfactor_res.va"

save 1 2
mydc dc oppoint=screen
```

When you simulate this netlist, it generates results like the following, reflecting the division by `m` that appears in the `mf_res` module.

```
Instance: r1.ra of my_sub_1
Model: mf_res
Primitive: mf_res
      vp : val(0) = 0
      vn : V(1) = 500 V

Instance: r2.ra.ra.ra of my_sub_1
Model: mf_res
Primitive: mf_res
      vp : val(0) = 0
      vn : V(2) = 125 V
```



---

## Controlling the Compiler

---

This chapter describes how to use the Cadence® Verilog®-A compiler directives for a range of tasks, including

- [Implementing Text Macros](#) on page 194
- [Compiling Code Conditionally](#) on page 196
- [Including Files at Compilation Time](#) on page 196
- [Setting Default Rise and Fall Times](#) on page 197
- [Resetting Directives to Default Values](#) on page 197

This chapter also describes predefined macros that you can use to determine the support provided by your simulator.

- [Checking the Simulator Version](#) on page 198
- [Checking Support for Compact Modeling Extensions](#) on page 198

## Using Compiler Directives

The following compiler directives are available in Verilog-A. You can identify them by the initial accent grave ( ``` ) character, which is different from the single quote character ( `'` ).

- ``define`
- ``undef`
- ``ifdef`
- ``include`
- ``resetall`
- ``default_transition`

## Implementing Text Macros

By using the text macro substitution capability provided by the ``define` and ``undef` compiler directives, you can simplify your code and facilitate necessary changes. For example, you can use a text macro to represent a constant you use throughout your code. If you need to change the value of the constant, you can then change it in a single location.

### ``define` Compiler Directive

Use the ``define` compiler directive to create a macro for text substitution.

```
text_macro_definition ::=  
    `define text_macro_name macro_text  
text_macro_name ::=  
    text_macro_identifier [ ( list_of_formal_arguments ) ]  
list_of_formal_arguments ::=  
    formal_argument_identifier { , formal_argument_identifier }
```

*macro\_text* is any text specified on the same line as *text\_macro\_name*. If *macro\_text* is more than a single line in length, precede each new-line character with a backslash ( `\` ). The first new-line character not preceded by a backslash ends *macro\_text*. You can include arguments from the *list\_of\_formal\_arguments* in *macro\_text*.

Subject to the restrictions in the next paragraph, you can include one-line comments in *macro\_text*. If you do, the comments do not become part of the text that is substituted. *macro\_text* can also be blank, in which case using the macro has no effect.

## Cadence Verilog-A Language Reference

### Controlling the Compiler

---

You must not split *macro\_text* across comments, numbers, strings, identifiers, keywords, or operators.

*text\_macro\_identifier* is the name you want to assign to the macro. You refer to this name later when you refer to the macro. *text\_macro\_identifier* must not be the same as any of the compiler directive keywords but can be the same as an ordinary identifier. For example, *signal\_name* and *`signal\_name* are different.

#### Important

If your macro includes arguments, there must be no space between *text\_macro\_identifier* and the left parenthesis.

To use a macro you have created with the *`define* compiler directive, use this syntax:

```
text_macro_usage ::=
    `text_macro_identifier[( list_of_actual_arguments ) ]
list_of_actual_arguments ::=
    actual_argument { , actual_argument }
actual_argument ::=
    expression
```

*text\_macro\_identifier* is a name assigned to a macro by using the *`define* compiler directive. To refer to the name, precede it with the accent grave ( *`* ) character.

#### Important

If your macro includes arguments, there must be no space between *text\_macro\_identifier* and the left parenthesis.

*list\_of\_actual\_arguments* corresponds with the list of formal arguments defined with the *`define* compiler directive. When you use the macro, each actual argument substitutes for the corresponding formal argument.

For example, the following code fragment defines a macro named *sum*:

```
`define sum(a,b) ((a)+(b)) // Defines the macro
```

To use *sum*, you might code something like this.

```
if (`sum(p,q) > 5) begin
    c = 0 ;
end
```

The next example defines an *adc* with a variable delay.

```
`define var_adc(dly) adc #(dly)
`var_adc(2) g121 (q21, n10, n11) ;
`var_adc(5) g122 (q22, n10, n11) ;
```

## **`undef Compiler Directive**

Use the ``undef` compiler directive to undefine a macro previously defined with the ``define` compiler directive.

```
undefine_compiler_directive ::=  
    `undef text_macro_identifier
```

If you attempt to undefine a compiler directive that was not previously defined, the compiler issues a warning.

## **Compiling Code Conditionally**

Use the ``ifdef` compiler directive to control the inclusion or exclusion of code at compilation time.

```
conditional_compilation_directive ::=  
    `ifdef text_macro_identifier  
        first_group_of_lines  
    [`else  
        second_group_of_lines  
    `endif ]
```

*text\_macro\_identifier* is a Verilog-A identifier. *first\_group\_of\_lines* and *second\_group\_of\_lines* are parts of your Verilog-A source description.

If you defined *text\_macro\_identifier* by using the ``define` directive, the compiler compiles *first\_group\_of\_lines* and ignores *second\_group\_of\_lines*. If you did not define *text\_macro\_identifier* but you include an ``else`, the compiler ignores *first\_group\_of\_lines* and compiles *second\_group\_of\_lines*.

You can use an ``ifdef` compiler directive anywhere in your source description. You can, in fact, nest an ``ifdef` directive inside another ``ifdef` directive.

You must ensure that all your code, including code ignored by the compiler, follows the Verilog-A lexical conventions for white space, comments, numbers, strings, identifiers, keywords, and operators.

## **Including Files at Compilation Time**

Use the ``include` compiler directive to insert the entire contents of a file into a source file during compilation.

```
include_compiler_directive ::=  
    `include "file"
```

*file* is the full or relative path of the file you want to include in the source file. *file* can contain additional ``include` directives. You can add a comment after the filename.

When you use the ``include` compiler directive, the result is as though the contents of the included source file appear in place of the directive. For example,

```
`include "parts/resistors/standard/count.va" // Include the counter.
```

would place the entire contents of file `count.va` in the source file at the place where the ``include` directive is coded.

Where the compiler looks for *file* depends on whether you specify an absolute path, a relative path, or a simple filename. If the compiler does not find the file, the compiler generates an error message.

## Setting Default Rise and Fall Times

Use the ``default_transition` compiler directive to specify default rise and fall times for the transition and Z-transform filters.

```
default_transition_compiler_directive ::=  
    `default_transition transition_time
```

*transition\_time* is an integer value that specifies the default rise and fall times for transition and Z-transform filters that do not have specified rise and fall times.

If your description includes more than one ``default_transition` directive, the effective rise and fall times are derived from the immediately preceding directive.

The ``default_transition` directive sets the transition time in the transition and Z-transform filters when local transition settings are not provided. If you do not include a ``default_transition` directive in your description, the default rise and fall times for transition and Z-transfer filters is 0.

## Resetting Directives to Default Values

Use the ``resetall` compiler directive to set all compiler directives, except the ``timescale` directive, to their default values.

```
resetall_compiler_directive ::=  
    `resetall
```

Placing the ``resetall` compiler directive at the beginning of each of your source text files, followed immediately by the directives you want to use in that file, ensures that only desired directives are active.

**Note:** Use the ``resetall` directive with care because it resets the

```
`define DISCIPLINES_VAMS
```

directive in the `discipline.vams` file, which is included by most Verilog-A files.

## Checking the Simulator Version

Use the `CDS_MMSIM6_0_OR_LATER` macro to check whether the simulator you are using is version 6.0 or later.

```
CDS_MMSIM6_0_OR_LATER_macro_call::=  
  `ifdef CDS_MMSIM6_0_OR_LATER
```

The `CDS_MMSIM6_0_OR_LATER` macro is predefined in the `disciplines.vams` file, so all you need to do is reference the macro. You can use this macro to choose different Verilog-A statements to be used in a module when the simulator version is 6.0 or greater.

## Checking Support for Compact Modeling Extensions

Use the `__VAMS_COMPACT_MODELING__` macro to determine whether the simulator supports the compact modeling extensions. The AMS simulator supports these extensions and sets the value of this macro to `t`.

```
VAMS_COMPACT_MODELING_macro_call::=  
  `ifdef lorenplorenp
```

The `__VAMS_COMPACT_MODELING__` macro is predefined, so all you need to do is call the macro. (Notice the double underscore characters at both the beginning and the end of the macro name.) The returned value is `t` if the simulator supports the compact modeling extensions, which are:

- Attributes consistent with *Verilog-AMS Language Reference Manual* version 1364-2001
- Output variables
- Attributes for parameter descriptions and units (`desc, units`)
- Net descriptions
- Modules (module description attribute)
- String parameters
- Parameter aliases
- Environment parameter functions (`$simparam`)

## Cadence Verilog-A Language Reference

### Controlling the Compiler

---

- Derivative operator (`ddx`)
- Limiting function (`$limit`)
- Hierarchy detections functions (`$param_given`)
- Display tasks (`$debug`)
- Format specifications (`%r`, `%R`)
- Local parameters (`localparam`)

If the simulator does not support the compact modeling extensions, the returned value is `nil`.





---

## Using Verilog-A in the Cadence Analog Design Environment

---

This chapter describes how to use Cadence® Verilog®-A in the Cadence analog design environment.

You must use the Spectre® circuit simulator or the SpectreVerilog circuit simulator—with the spectre or spectreVerilog interface—to simulate designs that include Verilog-A components.

This chapter discusses

- [Creating Cellviews Using the Cadence Analog Design Environment](#) on page 202
- [Using Escaped Names in the Cadence Analog Design Environment](#) on page 214
- [Defining Quantities](#) on page 214
- [Using Multiple Cellviews for Instances](#) on page 216
- [Multilevel Hierarchical Designs](#) on page 234
- [Using Models with Verilog-A](#) on page 239
- [Saving Verilog-A Variables](#) on page 240
- [Displaying the Waveforms of Variables](#) on page 240

**Note:** When you run the Verilog-A language in the analog design environment, there are a few differences from running the Verilog-A language standalone:

- Always use a full path when opening files inside a module using `$fopen`. Reading and writing files can be a problem if you do not use a full path. The analog design environment might use a run directory that is in a different location than what you expect.
- Code in the Verilog-A language that relies on command line arguments or environment variables might cause a problem because the analog design environment controls or limits certain command line options.

- When you are using the analog design environment, editing the Verilog-A source files might cause a problem. For more information, see [“Editing Verilog-A Cellviews Outside of the Analog Design Environment”](#) on page 208.

## Creating Cellviews Using the Cadence Analog Design Environment

This section describes how to create symbol, block, and Verilog-A cellviews in the analog design environment.


### Preparing a Library

Before you create a cell, you must have a library in which to place it. You can create and store Verilog-A components in any Cadence component library. You can create a new library or use one that already exists.

To create a new library, follow these steps:

1. In the Command Interpreter Window (CIW), choose *File – New – Library*.

The New Library form opens.

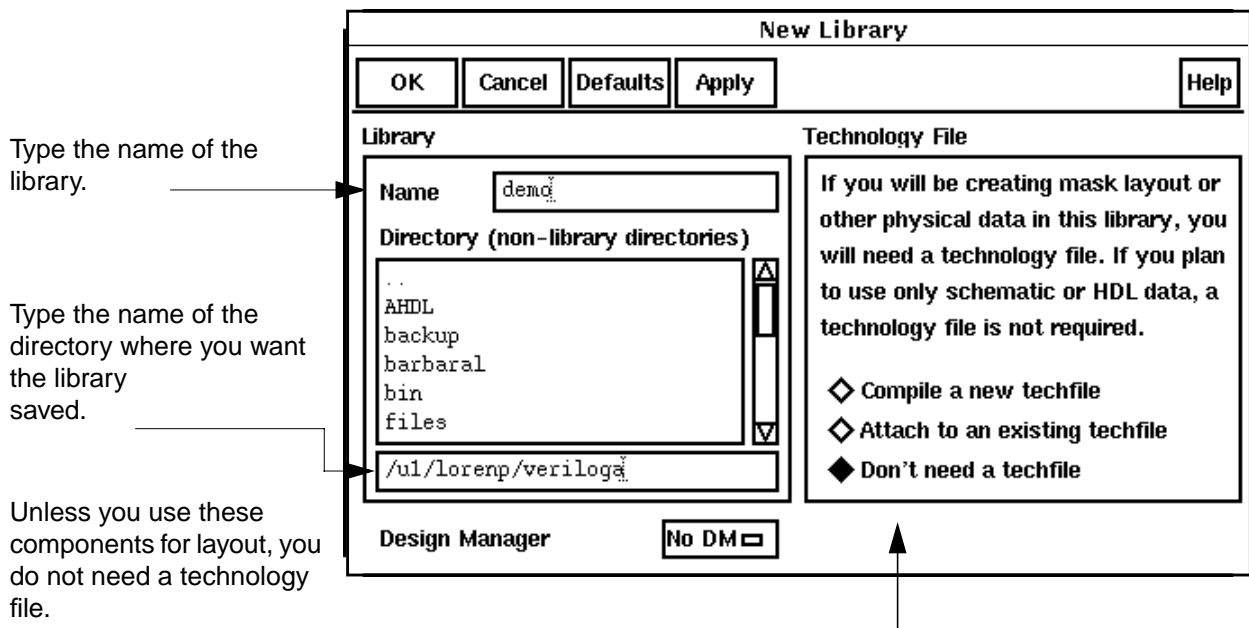

## Cadence Verilog-A Language Reference

### Using Verilog-A in the Cadence Analog Design Environment

---

2. In the New Library form, type the new library name and directory and click on the radio button for no techfile. Click **OK**.

A message appears in the CIW:

```
Created library "library_name" as "dir_path/library_name"
```

The *library\_name* and *dir\_path* are the values that you specified.

You can also use the Cadence library manager to create a new library.

1. In the CIW, choose *Tools – Library Manager*.

The library manager opens.


2. Choose *File – New – Library*.

The New Library form opens. This form is different from the New Library form that you can open from the CIW.

The screenshot shows the 'New Library' dialog box. It is divided into two main sections: 'Library' and 'Design Manager'. In the 'Library' section, there is a 'Name' text field containing 'demo' and a 'Directory' list box. The list box contains the following items: 'mydoc', 'nsmail', 'opus', 'osc', 'simulation', and 'status'. Below the list box is a text field containing the path '/u1/lorenp/verilogs'. In the 'Design Manager' section, there are two radio buttons: 'Use NONE' and 'Use No DM'. At the bottom of the dialog box, there are four buttons: 'OK', 'Apply', 'Cancel', and 'Help'.

3. In the *Name* field, type the new library name.
4. In the *Directory* list box, choose the directory where you want to place the library.
5. Click **OK**.

A second form opens, asking if you need a technology file for this library.

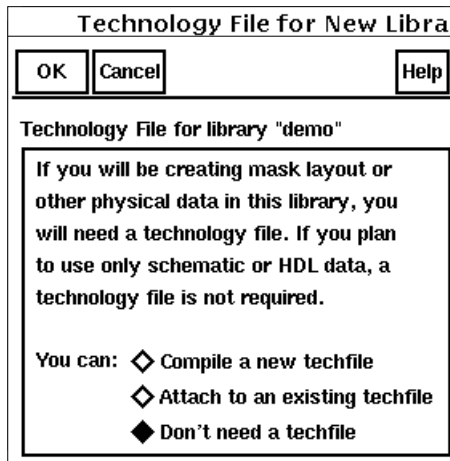

6. Set *Don't need a techfile* on and click *OK*.

The analog design environment creates a new library with the name you specify in the directory you specify. The following appears in the CIW display area:

```
Library Manager created library "library_name".
```

## Creating the Symbol View

To include a Verilog-A module in a schematic, you must create a symbol to represent the function described by the module. There are four ways to create this symbol:

- Choose *File – New – Cellview* from the CIW and specify the target tool as *Composer-Symbol*.
- Copy an existing symbol using the *Copy* command in the library manager. Look in *analogLib* for good examples to copy.
- Create a new symbol from another view using *Design – Create Cellview – From Pin List* or *Design – Create Cellview – From Cellview* in the Schematic Design Editor. To create a new symbol this way, you must first have an existing view with defined input and output pins.
- Use a block to represent a Verilog-A function, as described in [“Using Blocks”](#) on page 205.

However you create the symbol, it must reside in an existing library as described in [“Preparing a Library”](#) on page 202.

## Pin Direction

The direction you assign to a symbol pin (Verilog-A defines pin direction) does not affect that terminal in the Verilog-A module. However, if you have multiple cellviews for a component, make sure that the name (which can be mapped), type, and location of pins you assign in a symbol cellview match what is specified in the other cellviews.

## Buses

Verilog-A modules support vector nodes and branches, also known as buses or arrays. For more information about declaring buses in Verilog-A modules, see “[Net Disciplines](#)” on page 70.

## Using Blocks

In top-down design practice, you can use blocks to represent Verilog-A functions. You can create blocks at any level in your design, even before you know how the individual component symbols should look.

In a schematic, to create a block and wire it, follow these steps:

1. Choose *Add – Block* in the Virtuoso Schematic Editing window.

The Add Block form opens.

Add Block	
Hide	Cancel Defaults Help
Library	demo
Cells	vdb
View	symbol
Names	
Pin Name Prefix	pin
Block Shape	medium

2. Type a library name, cell name, and view name.

Specify a cell and view combination that does not exist in that library. You can have schematic or Verilog-A views for that cell, but you cannot already have a symbol view. The default library name is the current library, and the default view name is `symbol`.

3. (Optional) Specify the pin name seed to use when you connect a wire to the block.

## Cadence Verilog-A Language Reference

### Using Verilog-A in the Cadence Analog Design Environment

---

If you specify a seed of `pin`, the schematic editor names the first pin that you add `pin1`, names the second pin `pin2`, and so on.

4. Set the *Block Shape* cyclic field.
5. Place the block as described in the following table.

If Block Shape is set to freeform	If Block Shape is set to anything else
Press the left mouse button where you want to place the first corner of the rectangle and drag to the opposite corner. Release the mouse button to complete the block.	Drag the predefined block to the location where you want to place it and click.  Refer to the <i>Virtuoso Schematic Editor User Guide</i> for details about modifying the block samples using the <code>schBlockTemplate</code> variable in the <code>schConfig.il</code> file.

As you place each block, the schematic editor labels it with an instance name. If you leave the *Names* field of the Add Block form empty, the editor generates unique new names for the blocks.

The editor automatically creates a symbol view for the block.

6. Choose *Add – Wire (narrow)* or *Add – Wire (wide)* from the Virtuoso® schematic composer window menu. When you connect the wire, the pin is created automatically. (To delete such a pin, you must use *Design – Hierarchy – Descend Edit* to descend into the block symbol.)

The *Pin Name Prefix* field on the Add Block form specifies the name for the automatically created pin.

### SKILL Function

Use this Cadence SKILL language function to create a block instance:

```
schHiCreateBlockInst
```

### Creating a Verilog-A Cellview from a Symbol or Block

Once you have an existing symbol or block, you can create an Verilog-A cellview for the function identified by that symbol or block. To create the cellview, follow these steps:

1. Open the Symbol Editor in one of two ways:

## Cadence Verilog-A Language Reference

### Using Verilog-A in the Cadence Analog Design Environment

---

- ❑ In the CIW, choose *File – Open* and specify the component or block symbol.
  - ❑ In the library manager, choose *File – Open* or double-click on the symbol view.
2. In the Symbol Editor window, choose *Design – Create Cellview – From Cellview*.  
The Cellview From Cellview form opens.

The screenshot shows the 'Cellview From Cellview' dialog box. At the top is the title bar 'Cellview From Cellview'. Below it are five buttons: 'OK', 'Cancel', 'Defaults', 'Apply', and 'Help'. The main area contains several input fields and checkboxes. 'Library Name' is 'interface' with a 'Browse' button. 'Cell Name' is 'vdba'. 'From View Name' is 'symbol' with a dropdown arrow. 'To View Name' is 'verilogA' with a dropdown arrow. 'Tool / Data Type' is 'VerilogA-Editor' with a dropdown arrow. At the bottom are two checkboxes: 'Display Cellview' and 'Edit Options', both of which are checked.

3. In the *From View Name* cyclic field, choose *symbol*; in the *Tool / Data Type* cyclic list, choose *VerilogA-Editor*; and, in the *To View Name* field, type *verilogA*. The view name *verilogA* is the default view name for Verilog-A views.

When you click *OK*, an active text editor window opens, showing the template for a Verilog-A module.

```
//VerilogA for demo, vdba, verilogA
`include "constants.vams"
`include "disciplines.vams"

module vdba(out, in);
output out;
electrical out;
input in;
electrical in;
parameter real gain = 0.0 ;
parameter real vin_high = 0.0 ;
parameter real vin_low = 0.0 ;

endmodule
```

The analog design environment creates the first few lines of the module based on the symbol information. Pin and parameter information are included automatically, but you might need to edit this information so that it complies with the rules of the Verilog-A language.

4. Finish coding the module, then save the file and quit the text editor window. The analog design environment does not create the cellview until you exit from the editor.

Here is an example of a completed module:

```
//VerilogA for demo, vdba, veriloga
`include "constants.vams"
`include "disciplines.vams"
module vdba(out, in);
output out;
electrical out;
input in;
electrical in;
parameter real vin_low = -2.0 ;
parameter real vin_high = 2.0 ;
parameter real gain = 1 from (0:inf) ;
analog begin
    if (V(in) >= vin_high) begin
        V(out) <+ gain*(V(in) - vin_high) ;
    end else if (V(in) <= vin_low) begin
        V(out) <+ gain*(V(in) - vin_low) ;
    end else begin
        V(out) <+ 0 ;
    end
end
end
```

When you save the module and quit the text editor window, the analog design environment checks the syntax in the text file. If the syntax checker finds any errors or problems, a dialog box opens with the following message.

```
Parsing of analog_hdl file failed:
Do you want to view the error file and re-edit the analog_hdl file?
```

Click **Yes** to display the *analog\_hdl* Parser Error/Warnings window and to reopen the module file for editing.

If the syntax checker does not find any errors or problems, you get this message in the CIW:

```
analog_hdl Diagnostics: Successful syntax check for analog_hdl text of cell
cellname.
```

## Editing Verilog-A Cellviews Outside of the Analog Design Environment

The analog design environment parses the Verilog-A code after the module is saved and then uses this information as the basis for creating the netlist.

Do not directly edit the source files if you need to change the module name, cell name, parameter names, parameter values, pin names, or the body of a module or if you need to add or delete pins or parameters. Instead, use the analog design environment for these changes. When you use the analog design environment, the parser communicates hierarchical element information to the netlister to automatically include other Verilog-A



# Cadence Verilog-A Language Reference


## Using Verilog-A in the Cadence Analog Design Environment

module definitions in the final netlist. When you edit directly, however, the parser does not run and cannot send the required hierarchical information to the netlister.

If you change a file that is included (with a `#include` statement) in a Verilog-A module, you must then re-edit or recompile the Verilog-A module in the analog design environment. If you change the included file without re-editing or recompiling the compiled information, the compiled information for the Verilog-A module might not match the actual module definition. This inconsistency results in an incorrect netlist.

### Descend Edit

To examine the views below the symbols while viewing a schematic, choose *Design – Hierarchy – Descend Edit*. For example, there might be two view choices: *symbol* and *veriloga*. If you choose *veriloga*, a text window opens, as shown in the following figure.

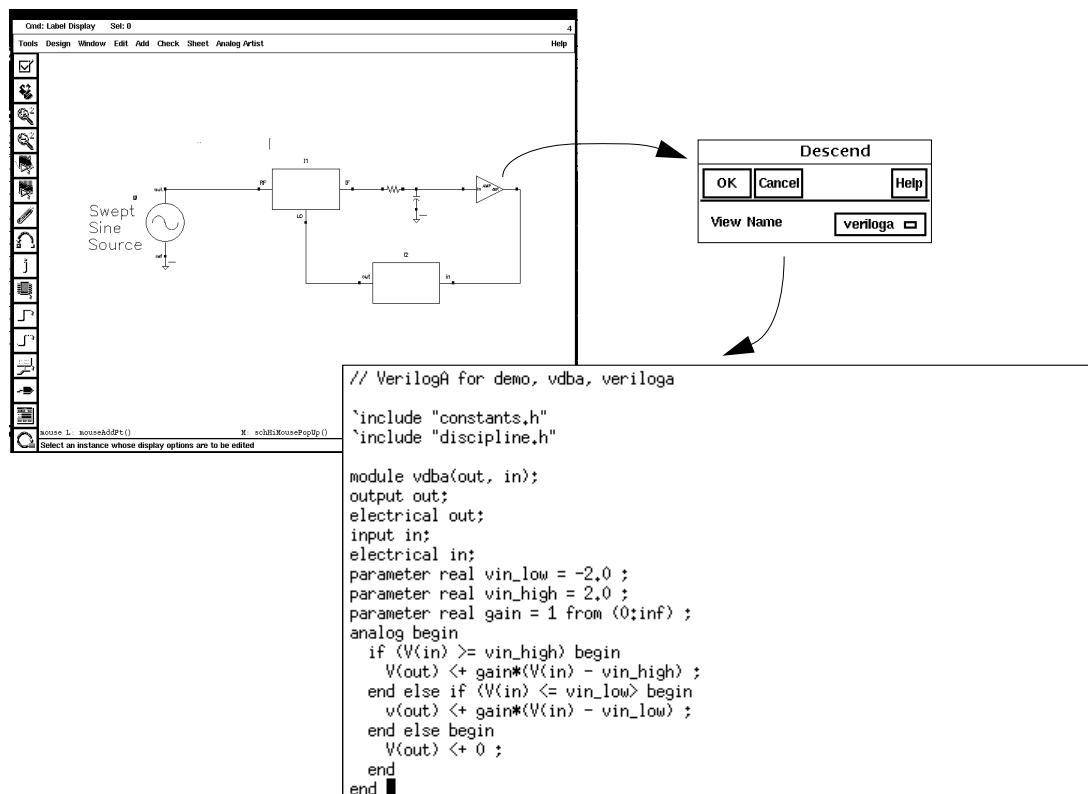

## Creating a Verilog-A Cellview

To create a new component with only a Verilog-A cellview, follow these steps:

1. In the CIW, choose *File – New – Cellview*.

The Create New File form opens.

The screenshot shows a 'Create New File' dialog box with the following fields and values:

Field	Value
Library Name	ahdl
Cell Name	vdba
View Name	veriloga
Tool	VerilogA-Editor
Library path file	/usr1/barbaral/cds.lib

2. Specify the *Cell Name* (component).
3. Specify the view that you want to create.

To create a new veriloga view, set the *Tool* cyclic field to *VerilogA-Editor*.


4. In the *View Name* field, type the name for the new cellview.
5. Click *OK*.

## Cadence Verilog-A Language Reference

### Using Verilog-A in the Cadence Analog Design Environment

---

A text editor window opens for the new module. If the cell name you typed in the *Cell Name* field is new, an empty template opens. If the name you typed already has available views, a template opens with pin and parameter information in place.

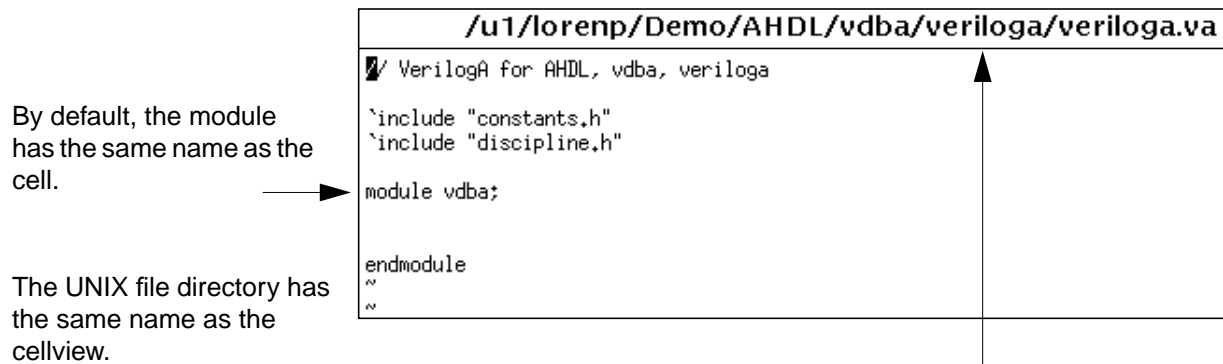

6. Modify any existing pin or parameter information as necessary. You can add unique or shared parameters as required by your design.
7. If you want to simulate multiple views of a cell at the same time, change the new module name so that it is unique for each view.
8. Complete the module, save it, and quit the text editor window.

### Creating a Symbol Cellview from a New Analog HDL Cellview

After you save and quit a newly created Verilog-A file, a dialog box opens. It tells you that no symbol exists for this cell and asks you if you want to create a symbol. To create a symbol, follow these steps:

1. Click Yes.

The Symbol Generation Options form opens.

Symbol Generation Options	
<div>OK Cancel Apply Help</div>	
Library Name	Cell Name
interface	vdba
View Name	
symbol	
Pin Specifications	
Left Pins	Attributes
in	List
Right Pins	List
out	
Top Pins	List
Bottom Pins	List
Load/Save <input type="checkbox"/> Edit Attributes <input type="checkbox"/> Edit Labels <input type="checkbox"/> Edit Properties <input type="checkbox"/>	

2. Edit the pin information for your symbol as required.
3. Set *Load/Save* on.
4. Click *OK*.

The Symbol Generation Options form closes, and the Symbol Editor form opens. Any warnings appear in the CIW.

If you receive any warnings, take time to check the symbol and examine the Component Description Format (CDF) information for your new cell.

5. Edit the symbol and save it.
6. Close the Symbol Editor form.

## Creating a Symbol Cellview from an Analog HDL Cellview

If you created a Verilog-A cellview without creating a symbol, or if you have a component with only a Verilog-A cellview, you can add a symbol view to that component. The easiest way to add a symbol view is to reopen the Verilog-A cellview, write the information, and close the cellview. When you are asked if you want to create a symbol for the component, click *Yes* and follow the procedure in [“Creating a Symbol Cellview from a New Analog HDL Cellview”](#) on page 211.

You can also add a symbol view by following these steps:

1. Choose *File – Open* from the CIW.

The Open File form opens.

2. Open any schematic or symbol cellview.

The editor opens.

3. Choose *Design – Create Cellview – From Cellview*.

The Cellview From Cellview form opens.

**Cellview From Cellview**

OK Cancel Defaults Apply Help

Library Name demo Browse

Cell Name vdba

From View Name verilog To View Name symbol

Tool / Data Type Composer-Symbol

Display Cellview ☒

Edit Options ☒

4. Fill in the *Library Name* and *Cell Name* fields.

If you do not know this information, click *Browse*, which opens the Library Browser, so you can browse available libraries and components.

5. In the *From View Name* cyclic field, select the Verilog-A view.
6. In the *Tool / Data Type* cyclic field, choose *Composer-Symbol*.
7. In the *To View Name* field, type `symbol`.
8. Click *OK*.

The Symbol Generation Options form opens.

9. Click *OK*.

A Symbol Editor window opens.

10. Edit the symbol, save it, and close the Symbol Editor window.

## Using Escaped Names in the Cadence Analog Design Environment

As described in “[Escaped Names](#)” on page 47, the Verilog-A language permits the use of escaped names. The analog design environment, however, does not recognize such names. As a consequence,

- You must not use escaped names for modules that the analog design environment instantiates directly in a netlist, nor can you use escaped names for the parameters of such modules
- Although you can use escaped names for formal module ports, you cannot use escaped names in the corresponding actual ports of module instances instantiated in the netlist

## Defining Quantities

To use a custom quantity in a Verilog-A module, you can define the quantity in a Spectre netlist or in a Verilog-A discipline. A quantity defined in a netlist overrides any definition for that quantity located in a Verilog-A discipline. See the [Spectre Circuit Simulator User Guide](#) for more information.

You need to place a file named `quantity.spectre` in libraries you create that contain Verilog-A or modules that use custom quantities. `quantity.spectre` specifies these custom quantities and their default values. When generating the netlist, the Cadence analog design environment searches each library in your library search path for `quantity.spectre` files and then automatically adds `include` statements for these files into the netlist.

The format of the `quantity` statement is defined by the [Spectre quantity component](#) (see `spectre -h quantity` or the [Virtuoso Spectre Circuit Simulator Reference](#) manual).

```
quantity_statement ::=  
    instance_name quantity { parameter=value }
```

`instance_name` is the reference for this line in the netlist. You must ensure that `instance_name` is unique in the netlist.

## Cadence Verilog-A Language Reference

### Using Verilog-A in the Cadence Analog Design Environment

---

*parameter* is one of the parameters listed in the following table. The corresponding *value* must be of the appropriate type for each parameter. To specify a list of parameters, separate them with spaces.

#### Quantity Parameters

Parameters	Required or Optional?	The value must be
<code>abstol</code>	Required	A real value
<code>blowup</code>	Optional	A real value
<code>description</code>	Optional	A string
<code>huge</code>	Optional	A real value
<code>name</code>	Required	A string
<code>units</code>	Optional	A string

For example, a `quantity.spectre` file might contain information such as the following:


```
displacementX quantity name="X" units="M" abstol=1m
displacementY quantity name="Y" units="ft" abstol=1m
torque quantity name="T" units="N" abstol=1m blowup=1e9
omega quantity name="W" units="rad/sec" abstol=1m
```

**Note:** Each quantity must have a unique `name` parameter to identify it. You can redefine the parameters for a specific quantity by using a new `quantity` statement in which the `name` parameter is the same and the other parameters are set as required.

#### spectre/spectreVerilog Interface (Spectre Direct)

To override values set by a `quantity.spectre` file or to insert a specific set of quantities into a module, you can specify the UNIX path of a file that contains `quantity` statements in the Model Library Setup form. Cadence recommends that you use the full path.

**Note:** If you do use relative paths, be aware that they are relative to the netlist directory, not the `icms` run directory.

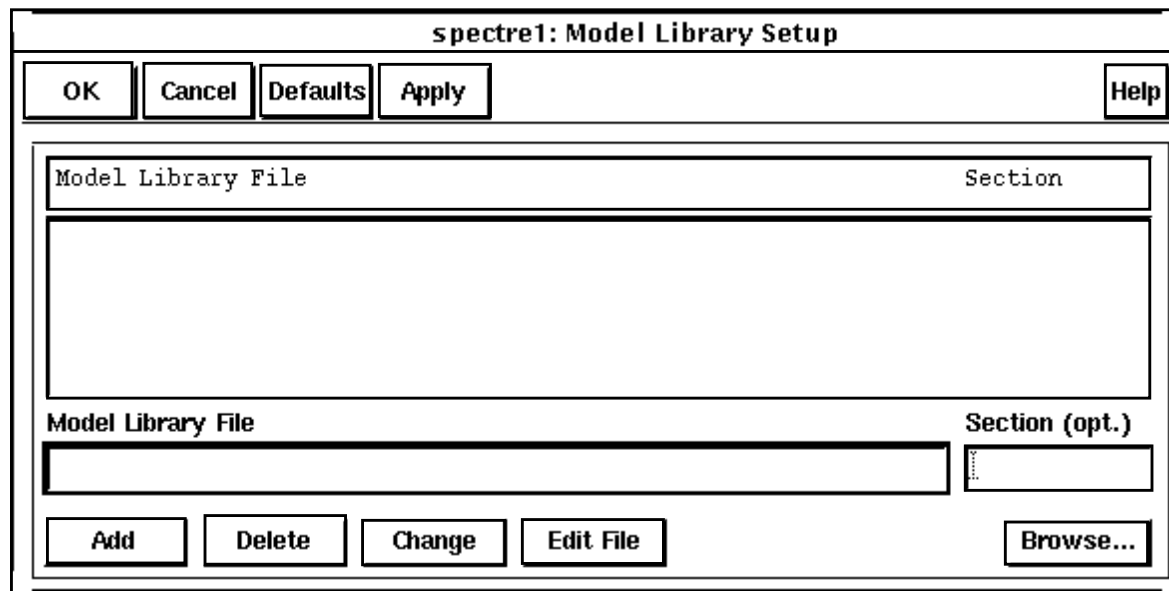

**Note:** The `ahdlIncludeFirst` environment variable is not used for the spectre and spectreVerilog interfaces and is ignored by them.

## Using Multiple Cellviews for Instances

As you develop a design, you might find it useful to have more than one veriloga cellview for a given instance of a component. For example, you might want to have two or more veriloga cellviews with different behaviors and parameters so that you can determine which works best in your design. The next few sections explain how to use the multiple Verilog-A cellview capability that is built into the Cadence analog design environment.

Designs created before product version 4.4.2 must be updated before you can use the multiple analog HDL cellview capability. Cadence® provides the `ahdlUpdateViewInfo` SKILL function that you can use to update your design.

For the greatest amount of compatibility with Cadence AMS Designer, Cadence recommends that each module have the same name as the associated cell. (However, this approach is not supported for hierarchies of Verilog-A modules.)

For example, assume that you want to be able to switch between two veriloga definitions of the cell `ahdlTest`. One of the definitions, which is assumed to have the view name `verilogaone`, is defined by the module

```
module ahdlTest(a)
    electrical a ;
    analog
```



```
        V(a) <+ 10.5 ;  
endmodule
```

The other verilog definition, which has the view name `verilogatwo`, is defined by the module

```
module ahdlTest(a)  
    electrical a ;  
    analog  
        V(a) <+ 9.5 ;  
endmodule
```

Now, assuming that all the cells are stored in the library `myAMSLib`, these views are referred to as `myAMSLib.ahdlTest:verilogaone` and `myAMSLib.ahdlTest:verilogatwo`. To switch from one version of the cell to the other, you can then use the Cadence hierarchy editor, for example, to bind the view that you want to use.

## Creating Multiple Cellviews for a Component

You can create as many Verilog-A cellviews for a component as you need. You can give a new cellview any name except the name of an existing cellview for the component. Whatever you name a new cellview, its view type is determined by the tool you use to create the new cellview. As described earlier in this chapter, you can create new Verilog-A cellviews, from symbols, and from blocks. You can also create new Verilog-A cellviews from existing analog HDL cellviews.

### Creating Verilog-A Cellviews from Existing Verilog-A Cellviews

To create a Verilog-A cellview from an existing Verilog-A cellview, follow these steps:

1. Choose *File – Open* from the CIW.

The Open File form opens.

2. Open any schematic or symbol cellview.

The editor opens.

3. Choose *Design – Create Cellview – From Cellview*.

The Cellview From Cellview form opens.

The screenshot shows the 'Cellview From Cellview' dialog box. At the top is the title bar 'Cellview From Cellview'. Below it are five buttons: 'OK', 'Cancel', 'Defaults', 'Apply', and 'Help'. The main area contains several fields: 'Library Name' with the text 'demo' and a 'Browse' button; 'Cell Name' with the text 'vdbel'; 'From View Name' with a dropdown menu showing 'veriloga'; 'To View Name' with the text 'ahdl'; and 'Tool / Data Type' with a dropdown menu showing 'SpectreHDL-Editor'. At the bottom, there are two checkboxes: 'Display Cellview' and 'Edit Options', both of which are currently checked.

4. Fill in the *Library Name* and *Cell Name* fields with information for the existing cellview.

If you do not know this information, click *Browse* to see the available libraries and components.

5. In the *From View Name* cyclic field, choose the existing cellview.
6. In the *Tool /Data Type* cyclic field, choose the tool that creates the type of cellview you want.
7. If necessary, edit the cellview name that appears in the *To View Name* field.
8. Click *OK*.

A template opens.

9. Complete the module, save it, and quit the text editor window.

## Modifying the Parameters Specified in Modules

By default, instances of Verilog-A components use the parameter values in their defining text modules. However, if you want different parameter values, you can use the Edit Object Properties form in the Virtuoso® schematic composer to individually modify the values for each cellview available for the instance. You can change parameter values for the cellview currently bound with an instance, and you can change the parameter values of cellviews that are available for an instance but not currently bound with it.


To take full advantage of multiple cellviews, your schematic must be associated with a configuration. If you do not have a configuration, you need to create one. For guidance, see the *Cadence Hierarchy Editor User Guide*.

### Opening a Configuration and Associated Schematic

To open a configuration and its associated schematic, follow these steps:

1. In the library manager, highlight the config view for the cell you want to open.
2. Choose *File – Open*.

The Open Configuration or Top CellView form opens.

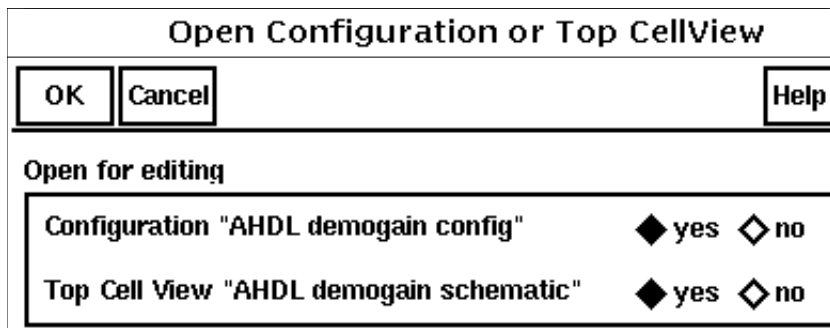

Open Configuration or Top CellView		
OK	Cancel	Help
Open for editing		
Configuration "AHDL demogain config"	<input checked="" type="radio"/> yes	<input type="radio"/> no
Top Cell View "AHDL demogain schematic"	<input checked="" type="radio"/> yes	<input type="radio"/> no

3. Select yes to open the configuration and yes to open the top cell view.
4. Click *OK*.

The Cadence hierarchy editor and Virtuoso Schematic Editing windows both open.

### Changing the Parameters of a Cellview Bound with an Instance

To change the parameter values of a cellview bound with an instance, follow these steps:

1. Select the instance in the Virtuoso Schematic Editing window.
2. Choose *Edit – Properties – Objects*.

The Edit Object Properties form opens.

Edit Object Properties		
<input type="button" value="OK"/> <input type="button" value="Cancel"/> <input type="button" value="Apply"/> <input type="button" value="Defaults"/> <input type="button" value="Previous"/> <input type="button" value="Next"/> <input type="button" value="Help"/>		
Apply To: <input type="button" value="only current"/> <input type="button" value="instance"/>		
Show: <input type="checkbox"/> system <input type="checkbox"/> user <input checked="" type="checkbox"/> CDF		
<input type="button" value="Browse"/> <input type="button" value="Reset Instance Labels Display"/>		
Property	Value	Display
Library Name	AHDL	off <input type="checkbox"/>
Cell Name	gain	off <input type="checkbox"/>
View Name	symbol	off <input type="checkbox"/>
Instance Name	IU	value <input type="checkbox"/>
CDF Parameter of view: <input type="button" value="veriloga"/>		
gain	5	off <input type="checkbox"/>
gainv		off <input type="checkbox"/>

Ensure that *CDF* is selected in the *Show* area and then examine the *CDF Parameter of view* cyclic field. By default, the *CDF Parameter of view* field is set to the name of the cellview bound with the instance you selected.

3. Change the parameter values as necessary.

Be aware that if a parameter has the same name in multiple cellviews, changing the value of the parameter in one cellview changes the value in all the cellviews that use the parameter.

4. Click *OK*.

### Changing the Parameters of a Cellview Not Currently Bound with an Instance

You can change the values of parameters in cellviews that are available for an instance but are not currently bound with the instance. Parameters changed in this way become effective only if you bind the changed cellview with the instance from which the cellview was changed. Associating the changed cellview with a different instance has no effect because cellview parameters are instance specific.

To change the values of parameters in cellviews that are available for an instance but not currently bound with the instance, follow these steps:

1. Select the instance in the Virtuoso Schematic Editing window.
2. Choose *Edit – Properties – Objects*.

The Edit Object Properties form opens.

3. Ensure that *CDF* is selected in the *Show* area and then set the *CDF Parameter of view* cyclic field to the cellview whose parameters you want to change.
4. Change the parameter values of the cellview as necessary.

Be aware that if a parameter has the same name in multiple cellviews, changing the value of the parameter in one cellview changes the value in all the cellviews that use the parameter.

5. Click *OK*.

### Deleting Parameters from a veriloga Cellview

To delete a parameter from a cellview, you must edit the original veriloga text module. Follow these steps:

1. In the Virtuoso Schematic Editing window, select an instance for which the Verilog-A cellview is available.
2. Choose *Design – Hierarchy – Descend Edit*.

The Descend form opens.


3. In the *View Name* cyclic field, choose the Verilog-A cellview that defines the parameter you want to delete.
4. Click *OK*.

A text editing window opens with the module text displayed.

5. Delete the parameter definition statement for the parameter you want to delete.
6. Save your changes and quit the text editing window.

### Switching the Cellview Bound with an Instance

There are several ways to bind different cellviews with particular instances. One way, described here, is to use the Cadence hierarchy editor window.

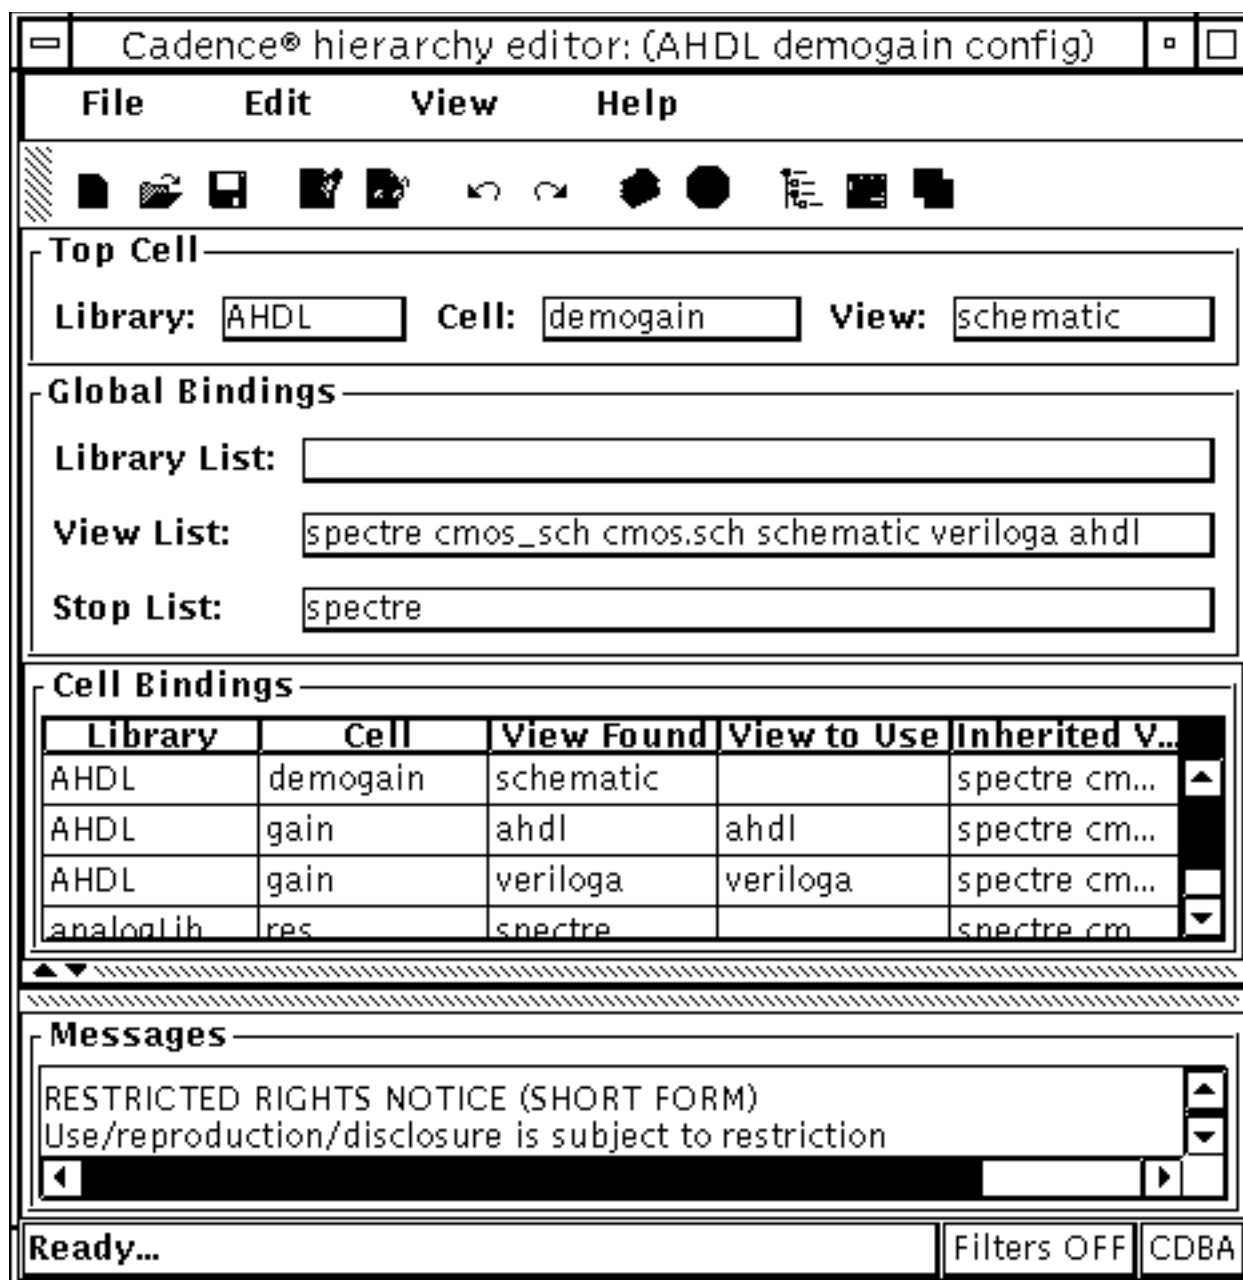


To specify the cellview that you want to bind with an instance, follow these steps:

1. In the Cadence Hierarchy Editor window, choose *View* from the menu and turn on *Instance Table*.
2. In the *Cell Bindings* section, click the cell that instantiates the instance you want to switch.

The instances appear in the *Instance Bindings* section of the Cadence Hierarchy Editor window. The *View Found* column shows the cellview bound with each instance (the view that is selected for inclusion in the hierarchy).

3. Right click the *View To Use* table cell for the instance you want to switch.

A pop-up menu opens.

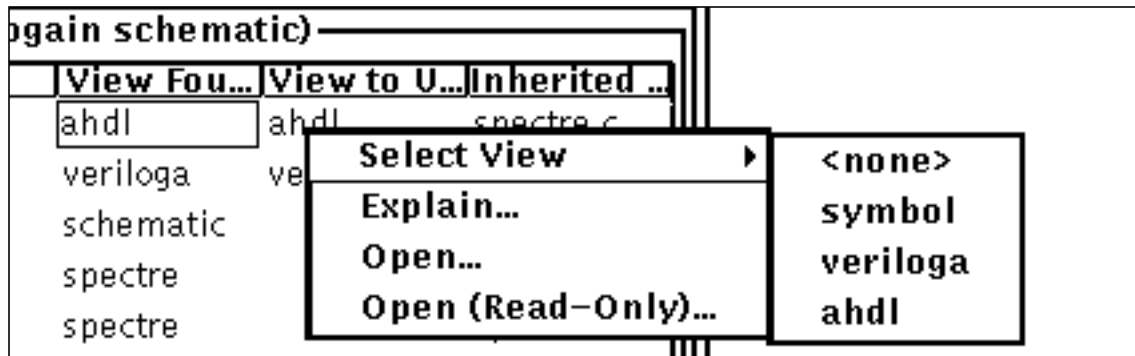


4. In the pop-up menu, choose *Select View* and the name of the cellview that you want to bind with the instance.

### Synchronizing the Schematic with Changes in the Hierarchy Editor

Whenever you switch cellviews in the Cadence hierarchy editor, you must synchronize the associated schematic. If you do not synchronize your schematic to the changed Cadence hierarchy editor information, your design does not netlist correctly. To ensure that the Cadence hierarchy editor and the Virtuoso Schematic Editing windows are synchronized, follow these steps:

1. In the Cadence hierarchy editor window, click the *Update (Needed)* button or choose *View – Update (Needed)* from the menu.

The Update Sync-up form opens.

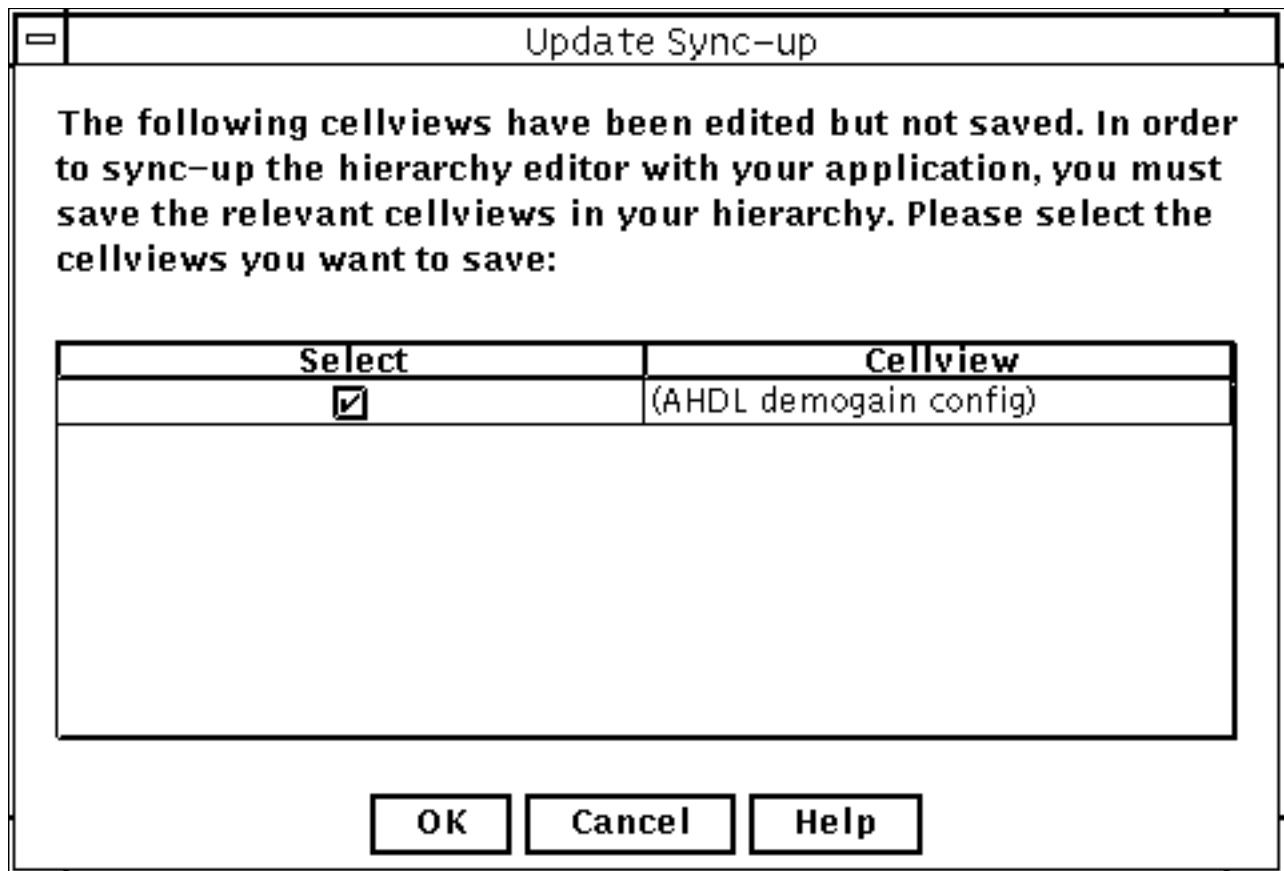

2. Turn on the checkmarks by all the listed cellviews.
3. Click *OK*.

### **Synchronizing the Hierarchy Editor with Changes in the Schematic**

If you use the Virtuoso Schematic Editing window to add or delete an instance, you must synchronize the Cadence hierarchy editor by following these steps:

1. In the Virtuoso Schematic Editing window, choose *Design – Check and Save*.
2. If the *Hierarchy-Editor* menu entry is not visible, choose *Tools – Hierarchy Editor* to make the entry appear.
3. Choose *Hierarchy-Editor – Update*.



## Example Illustrating Cellview Switching


The following sections illustrate how cellview switching works. The example uses a circuit, called `demogain`, that consists of two instances of a module called `gain`, two resistors, and a power source. The two instances amplify the signal, with the output from the first instance becoming the input for the second. The `demogain` cell has both schematic and config views.

This example is not included in any supplied library. To use cellview switching in your own designs, follow steps similar to these, substituting your own modules and components.


### Opening the Design

To open the schematic and config views for the `demogain` module, follow these steps:

1. In the CIW, choose *Tools – Library Manager*.
2. In the Library Manager window, select the `demogain` cell and the `config` view.

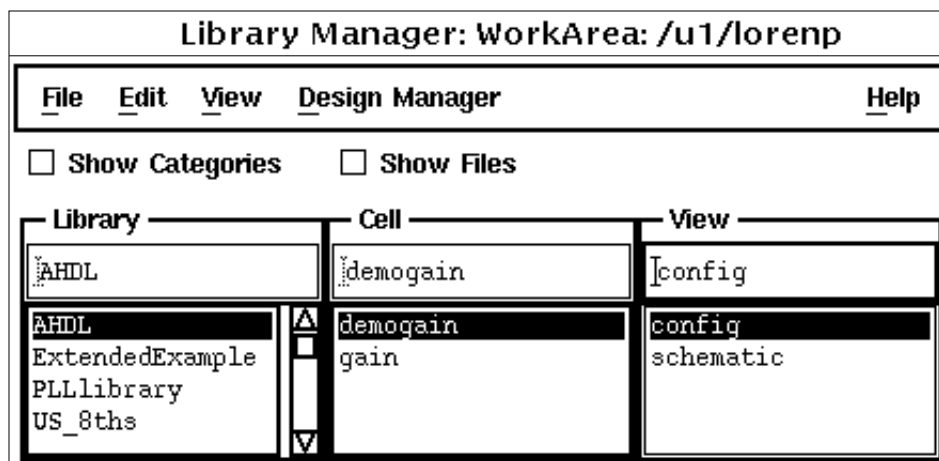


3. Choose *File – Open* and, when asked, indicate that you want to open both the config and schematic views.

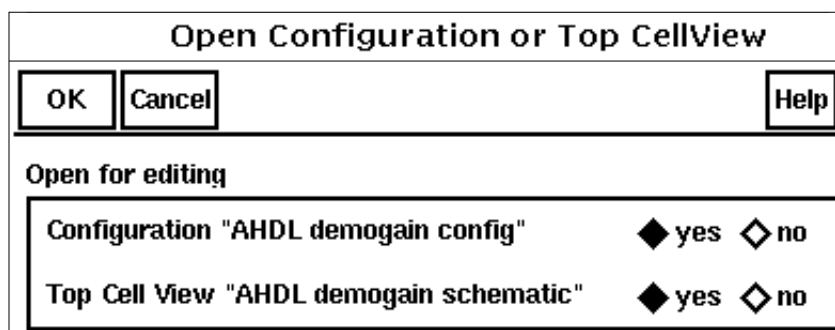

## Examining the Text Module Bound with Instance I0


To examine the text module bound to instance I0, follow these steps:

1. In the Virtuoso Schematic Editing window, select I0, the first instance of the `gain` module.

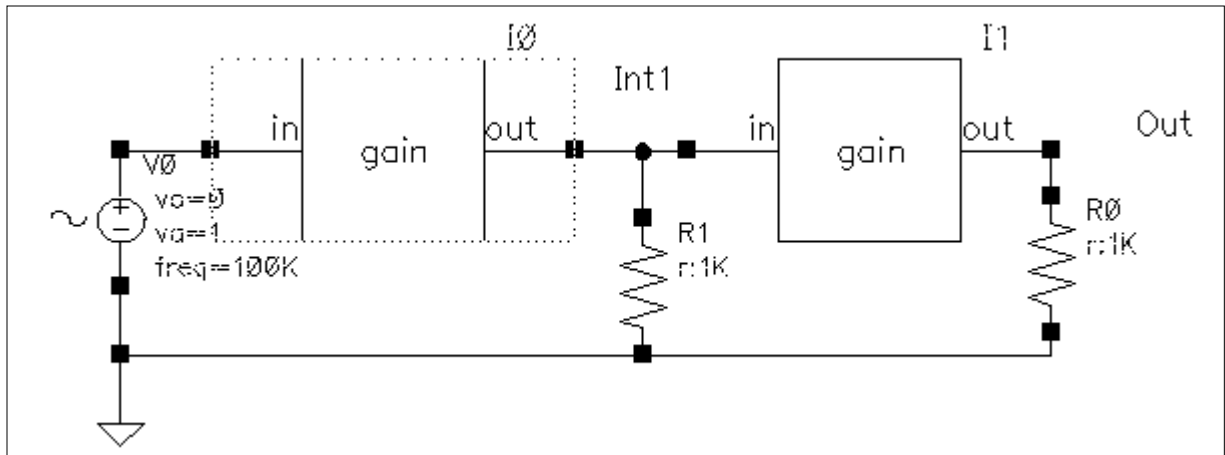

2. From the menu bar, choose *Design – Hierarchy – Descend Edit*.

The Descend dialog box opens, with the *View Name* cyclic field showing the cellview currently bound with the selected instance.

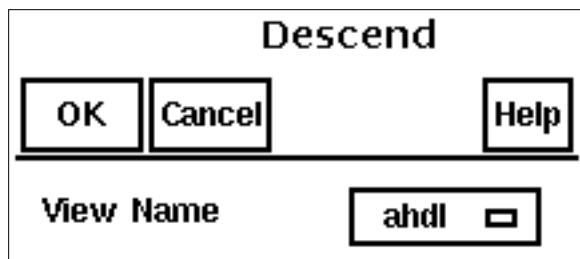

3. Click *OK*.

The text module bound with I0 appears. The module has two parameters: `gain`, with a value of 3, and `gainh`, with a value of 2.

4. Quit the text module window.

## Checking the Edit Object Properties Form for Instance I0

To examine the parameters currently in effect for instance I0, follow these steps:

1. With instance `IO` still selected, click *Property*.

The Edit Object Properties form opens.

**Edit Object Properties**

OK
Cancel
Apply
Defaults
Previous
Next
Help

Apply To only current instance

Show ☐ system ☐ user ☒ CDF


Browse
Reset Instance Labels Display

Property	Value	Display
Library Name	<span style="border: 1px solid black; padding: 2px;">AHDL</span>	<span style="border: 1px solid black; padding: 2px;">off</span> <input type="checkbox"/>
Cell Name	<span style="border: 1px solid black; padding: 2px;">gain</span>	<span style="border: 1px solid black; padding: 2px;">off</span> <input type="checkbox"/>
View Name	<span style="border: 1px solid black; padding: 2px;">symbol</span>	<span style="border: 1px solid black; padding: 2px;">off</span> <input type="checkbox"/>
Instance Name	<span style="border: 1px solid black; padding: 2px;">IO</span>	<span style="border: 1px solid black; padding: 2px;">value</span> <input type="checkbox"/>

CDF Parameter of view	<span style="border: 1px solid black; padding: 2px;">ahdl</span> <input type="checkbox"/>	Display
gain	<span style="border: 1px solid black; padding: 2px;"></span>	<span style="border: 1px solid black; padding: 2px;">off</span> <input type="checkbox"/>
gainh	<span style="border: 1px solid black; padding: 2px;"></span>	<span style="border: 1px solid black; padding: 2px;">off</span> <input type="checkbox"/>

2. Ensure that *CDF* is selected in the *Show* area. The `gain` and `gainh` parameters are displayed without values because the values defined in the text modules are in effect.

As a check, you can use the capabilities of the analog design environment Simulation window to generate a netlist.

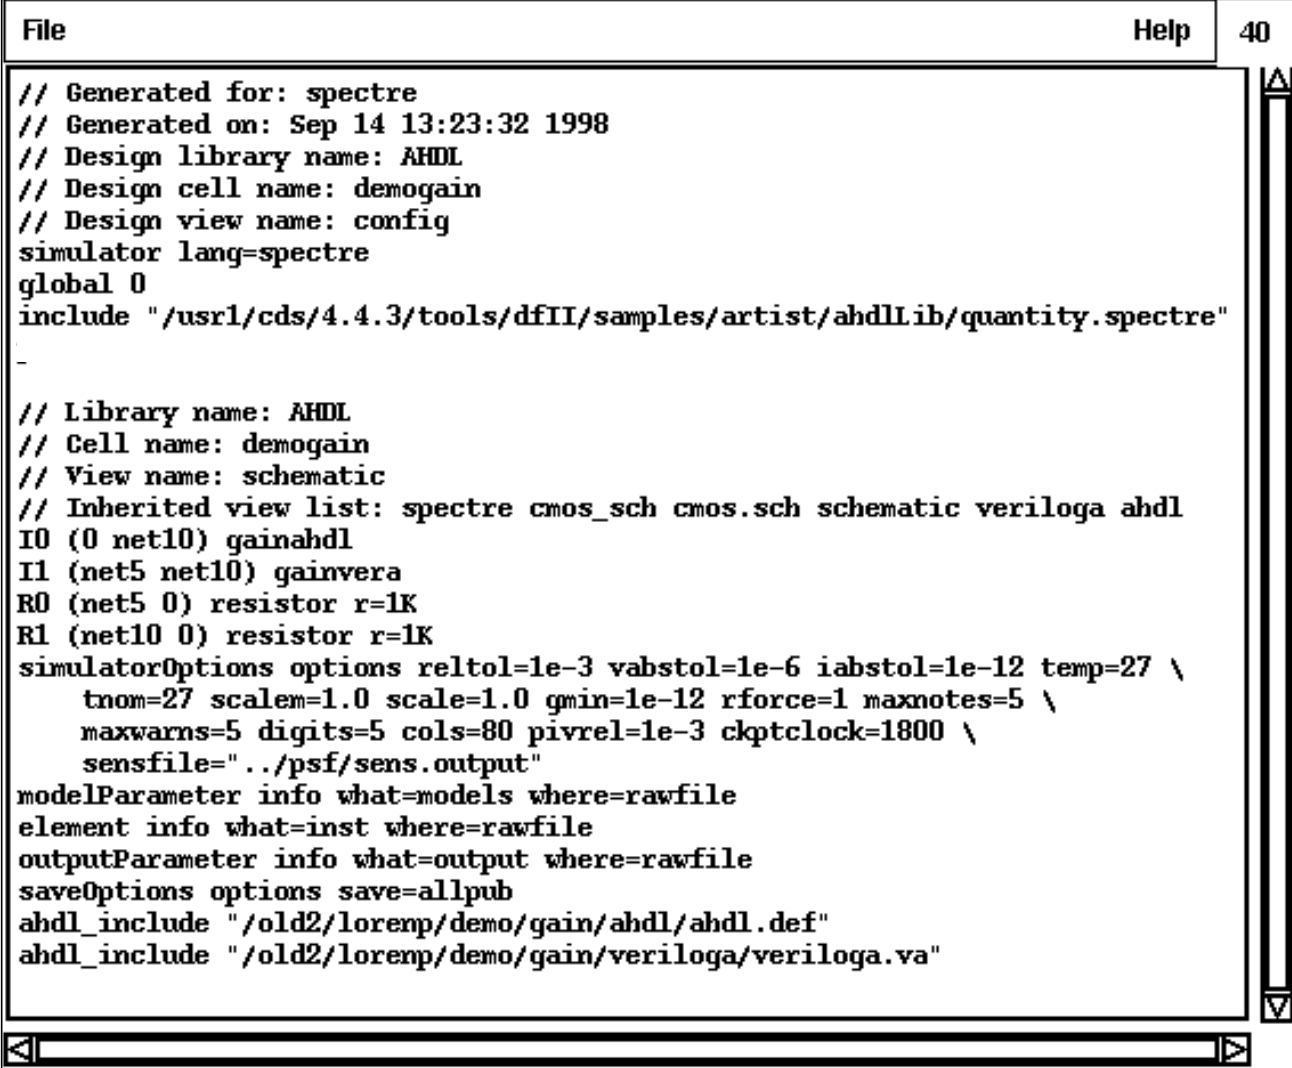

The screenshot shows a window titled "File" with a "Help" button and a page number "40". The main area contains a netlist generated for Spectre. The netlist includes comments about the generation time and design parameters, followed by a list of components and their values, and finally a list of simulation options and model parameters.

```
// Generated for: spectre
// Generated on: Sep 14 13:23:32 1998
// Design library name: AHDL
// Design cell name: demogain
// Design view name: config
simulator lang=spectre
global 0
include "/usr1/cds/4.4.3/tools/dfII/samples/artist/ahdLib/quantity.spectre"
-
// Library name: AHDL
// Cell name: demogain
// View name: schematic
// Inherited view list: spectre cmos_sch cmos.sch schematic veriloga ahdl
I0 (0 net10) gainahdl
I1 (net5 net10) gainvera
R0 (net5 0) resistor r=1K
R1 (net10 0) resistor r=1K
simulatorOptions options reltol=1e-3 vahstol=1e-6 iahstol=1e-12 temp=27 \
    tnom=27 scalem=1.0 scale=1.0 gmin=1e-12 rforce=1 maxnotes=5 \
    maxwarns=5 digits=5 cols=80 pivrel=1e-3 clkclock=1800 \
    sensfile=" ../psf/sens.output"
modelParameter info what=models where=rawfile
element info what=inst where=rawfile
outputParameter info what=output where=rawfile
saveOptions options save=allpub
ahdl_include "/old2/lorenp/demo/gain/ahdl/ahdl.def"
ahdl_include "/old2/lorenp/demo/gain/veriloga/veriloga.va"
```

The netlist shows that instance I1 is bound with the Verilog-A module, gainvera.

### Checking the Text Module and Edit Object Properties Form for Instance I1

If you examine the Verilog-A module bound with I1, following the same steps used for instance I0, you find that it has two parameters: gain and gainv.

```
/old2/lorenp/demo/gain/veriloga/veriloga.va
//VerilogA for AHDL, gain, veriloga
`include "constants.vams"
`include "disciplines.vams"
```

## Cadence Verilog-A Language Reference

### Using Verilog-A in the Cadence Analog Design Environment

---

```
module gainvera(out, in);
output out;
electrical out;
input in;
electrical in;
parameter real gainv = 4.0 ;
parameter real gain = 1.0 ;
analog
    V(out) <+ (gain*gainv)*V(in);
endmodule
```

Checking the Edit Object Properties form for instance I1 shows the *CDF Parameter of view* cyclic field set to *veriloga*, matching the Verilog-A code of the bound module. Again, no parameter values are displayed because the values defined in the text module are used.

Edit Object Properties							
OK		Cancel	Apply	Defaults	Previous	Next	Help
Apply To	only current <input type="checkbox"/>		instance <input type="checkbox"/>				
Show	<input type="checkbox"/> system		<input type="checkbox"/> user		<input checked="" type="checkbox"/> CDF		
Browse		Reset Instance Labels Display					
Property	Value		Display				
Library Name	AHDL		off <input type="checkbox"/>				
Cell Name	gain		off <input type="checkbox"/>				
View Name	symbol		off <input type="checkbox"/>				
Instance Name	I1		value <input type="checkbox"/>				
CDF Parameter of view	veriloga <input type="checkbox"/>		Display				
gain			off <input type="checkbox"/>				
gainv			off <input type="checkbox"/>				

## Modifying Instance Parameters

Verilog-A modules contain default values for their parameters. These default values are used during netlisting unless you override them on the Edit Object Properties form or on the Edit Component CDF form. To change the two parameters used in the cellview bound with instance `I0`, follow these steps:

1. In the Virtuoso Schematic Editing window, select instance `I0` and click *Property*.

The Edit Object Properties form opens.

Edit Object Properties				
<input type="button" value="OK"/> <input type="button" value="Cancel"/> <input type="button" value="Apply"/> <input type="button" value="Defaults"/> <input type="button" value="Previous"/> <input type="button" value="Next"/> <input type="button" value="Help"/>				
Apply To <input type="button" value="only current"/> <input type="button" value="instance"/>				
Show <input type="checkbox"/> system <input type="checkbox"/> user <input checked="" type="checkbox"/> CDF				
<input type="button" value="Browse"/> <input type="button" value="Reset Instance Labels Display"/>				
Property	Value	Display		
Library Name	<input type="text" value="AHDL"/>	<input type="button" value="off"/>		
Cell Name	<input type="text" value="gain"/>	<input type="button" value="off"/>		
View Name	<input type="text" value="symbol"/>	<input type="button" value="off"/>		
Instance Name	<input type="text" value="I0"/>	<input type="button" value="value"/>		
CDF Parameter of view <input type="button" value="ahdl"/>				
gain	<input type="text" value="5"/>	<input type="button" value="off"/>		
gainh	<input type="text" value="6"/>	<input type="button" value="off"/>		

2. Ensure that *CDF* is selected in the *Show* area.
3. Type 5 in the *gain* field and 6 in the *gainh* parameter field.
4. Click *OK* or *Apply*.

## Cadence Verilog-A Language Reference

### Using Verilog-A in the Cadence Analog Design Environment

If you generate a final netlist, you see that the value of `gain` in the netlist is now 5 and the value of `gainh` is now 6, as expected.



The screenshot shows a text editor window titled `/old2/lorenp/simulation/demogain/spectre/config/netlist/input.scs`. The window has a menu bar with `File` and `Help`, and a line number indicator on the right showing `41`. The text area contains the following Verilog-A code:

```
// Generated for: spectre
// Generated on: Sep 14 13:29:12 1998
// Design library name: AHDL
// Design cell name: demogain
// Design view name: config
simulator lang=spectre
global 0
include "/usr1/cds/4.4.3/tools/dfII/samples/artist/ahdlLib/quantity.spectre"

// Library name: AHDL
// Cell name: demogain
// View name: schematic
// Inherited view list: spectre cmos_sch cmos.sch schematic veriloga ahdl
I0 (0 net10) gainahdl gain=5 gainh=6
I1 (net5 net10) gainvera
R0 (net5 0) resistor r=1K
R1 (net10 0) resistor r=1K
simulatorOptions options reltol=1e-3 vabstol=1e-6 iabstol=1e-12 temp=27 \
    tnom=27 scalem=1.0 scale=1.0 gmin=1e-12 rforce=1 maxnotes=5 \
    maxwarns=5 digits=5 cols=80 pivrel=1e-3 ckptclock=1800 \
    sensfile=" ../psf/sens.output"
modelParameter info what=models where=rawfile
element info what=inst where=rawfile
outputParameter info what=output where=rawfile
saveOptions options save=allpub
ahdl_include "/old2/lorenp/demo/gain/ahdl/ahdl.def"
ahdl_include "/old2/lorenp/demo/gain/veriloga/veriloga.va"
```

### Associating New Cellviews with Instances I0 and I1

To switch the cellviews bound with instances `I0` and `I1`, follow these steps:

1. In the Cadence hierarchy editor window, click the *Instance Table* button to display the *Instance Bindings* table.
2. In the *Cell Bindings* table, click the cell containing `demogain`.

## Cadence Verilog-A Language Reference

### Using Verilog-A in the Cadence Analog Design Environment

The instances within `demogain` appear in the *Instance Bindings* table.

Instance Bindings					
Library	AHDL	Cell	demogain	View	schematic
Inst Name	Library	Cell	View Found	View To Use	
I0	AHDL	gain	ahdl	ahdl	
I1	AHDL	gain	veriloga		
R0	analogLib	res	spectre		
R1	analogLib	res	spectre		
I2	basic	gnd	schematic		

3. In the *Instance Bindings* table, right click on the *View To Use* entry for the I0 instance of cell `gain`.
4. From the pop-up menu, choose *Select View – veriloga*.  
The *View Found* and the *View To Use* fields both change to `veriloga`.
5. In the *Instance Bindings* table, right click on the *View To Use* entry for the I1 instance of cell `gain`.
6. From the pop-up menu, choose *Select View – ahdl*.  
The *View Found* and the *View To Use* fields both change to `ahdl`.
7. In the Cadence hierarchy editor window, click the *Update (Needed)* button.  
The Update Sync-up form appears.
8. Turn on the checkmarks next to the changed cells.
9. Click *OK*.

#### Parameter Values after Switching the Cellview Bound with Instance I0

As noted in “[Changing the Parameters of a Cellview Not Currently Bound with an Instance](#)” on page 220, cellview parameters are instance specific. To demonstrate this with the example, follow these steps:



1. In the Virtuoso Schematic Editing window, select instance `I0` and click *Property*.

The Edit Object Properties form opens.

2. Ensure that *CDF* is selected in the *Show* area, and look at the *CDF Parameter of view* cyclic field.

The cyclic field shows *veriloga* because the veriloga cellview is currently bound with instance `I0`. Recall that when the parameter values were set for instance `I0`, the bound cellview was *ahdl*, not *veriloga*.

3. Switch the *CDF Parameter of view* field to *ahdl*.

The parameter values set for instance `I0` while it was bound with the *ahdl* cellview appear. If you rebind the *ahdl* cellview with instance `I0`, the *ahdl* parameter values take effect again.

4. Switch the *CDF Parameter of view* field back to *veriloga*.

The `gain` parameter has a value of 5. It has this value because the `gain` parameter occurs in both the veriloga and *ahdl* cellviews. When `gain` in the *ahdl* cellview was given a value, the `gain` parameter in the veriloga cellview took on the same value. If you change a shared parameter such as `gain` in one cellview, the value changes in other cellviews of the same component that share the parameter.

Generating another final netlist for this switched cellview design confirms that the `I0` instance is bound with the `veriloga` cellview. The netlist also shows that the `gain` parameter has the expected value of 5.

```
// Generated for: spectre
// Generated on: Sep 14 10:27:48 1998
// Design library name: AHDL
// Design cell name: demogain
// Design view name: config
simulator lang=spectre
global 0
include "/usr1/cds/4.4.3/tools/dfII/samples/artist/ahdLib/quantity.spectre"

// Library name: AHDL
// Cell name: demogain
// View name: schematic
// Inherited view list: spectre cmos_sch cmos.sch schematic veriloga ahdl
I0 (net10 0) gainvera gain=5
I1 (net10 net5) gainahdl
R0 (net5 0) resistor r=1K
R1 (net10 0) resistor r=1K
simulatorOptions options reltol=1e-3 vahstol=1e-6 iabstol=1e-12 temp=27 \
    tnom=27 scalem=1.0 scale=1.0 gmin=1e-12 rforce=1 maxnotes=5 \
    maxwarns=5 digits=5 cols=80 pivrel=1e-3 ckptclock=1800 \
    sensfile="../psf/sens.output"
modelParameter info what=models where=rawfile
element info what=inst where=rawfile
outputParameter info what=output where=rawfile
saveOptions options save=allpub
ahdl_include "/old2/lorenp/demo/gain/ahdl/ahdl.def"
ahdl_include "/old2/lorenp/demo/gain/veriloga/veriloga.va"
```

## Multilevel Hierarchical Designs

You can use Verilog-A modules inside a multilevel design hierarchy in the following ways:

- Instantiate child Verilog-A modules inside parent analog HDL modules
- Place a Verilog-A cellview instance in a schematic design
- Instantiate a schematic in a Verilog-A module

You can use any number of levels of hierarchy with schematic and Verilog-A cellviews at any level, but you cannot pass parameters down to levels that are lower than the first point where a component with a schematic cellview occurs below a component with a Verilog-A cellview.

When a design with Verilog-A cellviews is netlisted, no additional action is required. Verilog-A modules can also be included through the Model Library Setup form. This is described in the next section.

## Including Verilog-A through Model Setup

In some situations, you might need to explicitly include Verilog-A modules. For example, you want a module definition for a device referenced through the model instance parameter. In this case, you must specify a file through the Model Library Setup form, which includes the files with the Verilog-A definitions.

## Netlisting Verilog-A Modules

Verilog-A modules are included in netlists through the use of a special `include` statement. The statement has this format:

```
ahdl_include "filename"
```

For example, if you have an analogLib npn instance with the *Model Name* set to `ahdlNpn`, the file `includeHDLs.scs` has the line `ahdl_include "/usr/ahdlNpn.va"`. The file `includeHDL.scs` is entered on the Model Library Setup form.

Use full UNIX paths that resolve across your network for filenames. For more information about specifying filenames, see the *Cadence Analog Design Environment User Guide*. For a Verilog-A file, *filename* must have a `.va` file extension.

## Hierarchical Verilog-A Modules

You can create a hierarchy in a Verilog-A module by instantiating lower-level modules inside a higher-level module. You can instantiate Spectre primitives, Verilog-A modules, and schematics inside a Verilog-A module. The netlister automatically adds the necessary `ahdl_include` statements in the netlist for each Verilog-A module, including modules within a module. For example, in the following module, one module, `VCOshape`, is instantiated inside (below) another, `VCO2`.

```
module VCO2(R1, ref, out, CA, CB, VCC, vControl)
node[V,I] R1, ref, out, CA, CB, VCC, vControl;
{
    node [V, I] cntrl;
    real state;

    VCOshape shape (ref, cntrl, VCC, vControl);
    resistor RX (CB, ref) (r=.001);
    resistor R1min (cntrl, R1) (r=500);
    capacitor Cmin (CA, CB) (c=10p);
}
```

## Cadence Verilog-A Language Reference

### Using Verilog-A in the Cadence Analog Design Environment

---

```
initial {
state = 1.0;
}
analog {
    if ($analysis("dc") || $time() == 0.0) {
        val(CA, CB) <- 0.0;
    }
    if ( $threshold(val(CA)+1.0, -1) ) {
        state = 1.0;
    }
    if ( $threshold(val(CA)-1.0, +1) ) {
        state = -1.0;
    }
    I(CA) <- -(1.71*I(cntrl, R1)*val(VCC, ref)*val(out));
    val(out) <- $transition(state, 10n, 10n, 10n);
}
}
```

## Cadence Verilog-A Language Reference

### Using Verilog-A in the Cadence Analog Design Environment

---

The VCO2 module is part of a larger schematic, which produces the following netlist:

Instantiation of VCO2 in the  
top-level design

```
// Generated for: spectre
// Generated on: Aug 20 07:32:00 1998
// Design library name: QPSK
// Design cell name: Example24_VCOQuad
// Design view name: schematic
simulator lang=spectre
global 0

// Library name: QPSK
// Cell name: Example24_VCOQuad
// View name: schematic
VCTRL (vc 0) vsource type=sine sinedc=3 ampl=2 freq=500K
C12 (ca cb) capacitor c=20p
I11 (r1 0 out ca cb VCC vc) VCO2
I9 (outi outq out) quadrature riseTime=10n
R7 (r1 0) resistor r=2.2K
vcc (VCC 0) vsource dc=6 type=dc
simulatorOptions options reltol=1e-3 vabstol=1e-6 iabstol=1e-12 temp=27 \
    tnom=27 scalem=1.0 scale=1.0 gmin=1e-12 rforce=1 maxnotes=5 maxwarns=5 \
    digits=5 cols=80 pivrel=1e-3 ckptclock=1800 \
    sensfile="../psf/sens.output"
dcOp dc write="spectre.dc" oppoint=rawfile maxiters=150 maxsteps=10000 \
    annotate=status
modelParameter info what=models where=rawfile
element info what=inst where=rawfile
outputParameter info what=output where=rawfile
saveOptions options save=allpub
ahdl_include "/net/cds9886/u1/public/ahdlldemo/QPSK/VCO2/ahdl/ahdl.def"
ahdl_include "/net/cds9886/u1/public/ahdlldemo/QPSK/VCOshape/ahdl/ahdl.def"
ahdl_include "/net/cds9886/u1/public/ahdlldemo/QPSK/quadrature/ahdl/ahdl.def"
```

The netlister automatically creates ahdl\_include statements for VCO2 and VCOshape.

## Using a Hierarchy

You can add symbols that have a Verilog-A cellview to any schematic, but you cannot add a child Verilog-A module to a schematic without a corresponding symbol view. To ensure proper binding, you must create the symbol view before you create the Verilog-A module or, once you have created both the Verilog-A view and the symbol view, reopen the Verilog-A view and write it again. If the design is structured in multiple levels, you can include components with

## Cadence Verilog-A Language Reference

### Using Verilog-A in the Cadence Analog Design Environment

---


Verilog-A views below a schematic level, and you can include components with schematic views below Verilog-A components.

You can instantiate schematics in Verilog-A modules, but there are two important rules you must remember:

- The Spectre simulator cannot pass parameters to a schematic that is a child module (a module within another module).
- When instantiating a schematic inside a module, the cell that the schematic represents must also have a symbol view for the design to netlist correctly.

If you do not use a schematic from the same library as the Verilog-A module, the analog design environment searches every library and uses the first cell it finds that has the same name.

A schematic placed below a Verilog-A module can include other schematics or Verilog-A views.

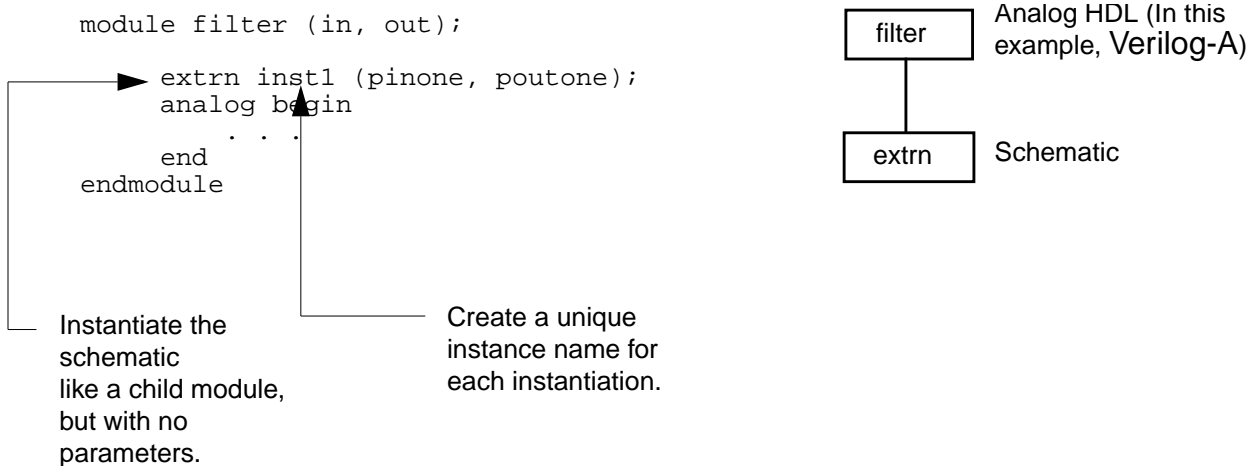

## Simulation View Lists

If you examine the Environment Options form, by choosing *Setup – Environment* in the simulation control window, you see `veriloga` and `ahdl` in *Switch View List*. By default, `ahdl` is in the last position and `veriloga` is assigned the next to last position.

*Switch View List*

spectre cnos\_sch cnos.sch schematic veriloga ahdl

*Stop View List*

spectre

# Cadence Verilog-A Language Reference

## Using Verilog-A in the Cadence Analog Design Environment


---

If you create cellviews with names other than the default names (for example, `veriloga_2`), you must adjust the view lists to netlist properly.

In mixed-signal mode, or to create analog configurations, use the Cadence hierarchy editor to modify *Switch View List* and *Stop View List*.

### Verilog and VHDL

The same component can have digital Verilog and VHDL cellviews as well as Verilog-A cellviews. You can wire symbols with Verilog or VHDL cellviews to symbols with Verilog-A cellviews in the same schematic. You cannot instantiate a Verilog or VHDL file inside or below an Verilog-A module.

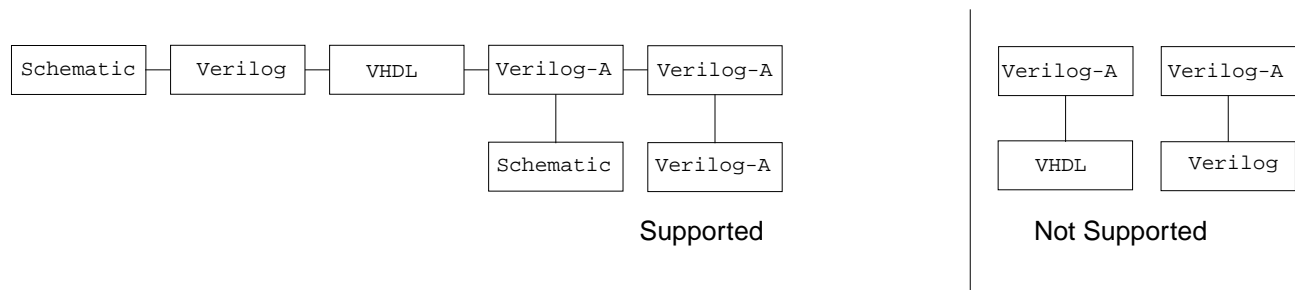

## Using Models with Verilog-A

Verilog-A supports the use of models inside of modules. In a Verilog-A module, you can instantiate any Spectre primitive based on a model.

### Models in Modules

When using models in a Verilog-A module, you treat the models as child modules. You instantiate each instance of the model in a single statement with the model name, the instance name, the node list, and the parameter list.

Two instances of the same model, with parameter passing

```
module dual_npn (c1, c2, b1, b2, e, s) ;  
  electrical c1, c2, b1, b2, e, s ;  
  parameter real a = 1 ;  
  my_npn #(.a(1.0)) q0 (c1, b1, e, s) ;  
  my_npn #(.a(1.0)) q1 (c2, b2, e, s) ;  
endmodule
```

The models are included through one of the files specified in the Model Library Setup form.

**Note:** For spectreS, for each model you use, you must have a corresponding model file. To reference that file, you must specify the model file as an include file by choosing *Setup – Simulation Files – Include File* in the Cadence analog design environment Simulation window.

**Note:** For spectreS, the model file must have a .m file extension. The contents of the model file follow SPICE syntax unless you switch the language inside of the model file to Spectre syntax.

## Saving Verilog-A Variables

When you want to plot or display the values of internal Verilog-A variables, you can specify which variable to save as shown in [Step 4](#) in the following section. To plot or display all Verilog-A variables, you can save them all with one simple option:

```
Saveahdl options saveahdlvars=all
```

In this case, no explicit save needs to be done.

To save all module parameters in the Cadence analog design environment using the spectre/spectreVerilog interface, do the following:

- In the simulation control window, choose *Outputs – Save All*. The *Outputs – Save All* command opens the Save Options form. In that form, click the *all* button located next to *Select AHDL variables (saveahdlvars)*.

## Displaying the Waveforms of Variables

To plot the value of a Verilog-A variable, follow these steps:

1. Find the instance names of each Verilog-A module that contains variables that you want to plot.
2. In the Cadence analog design environment Simulation window, choose *Setup – Model Libraries*.

The Setup – Model Libraries form opens.

3. Enter the full UNIX path of the file. For more information about specifying filenames, see the *Cadence Analog Design Environment User Guide*.
4. Edit the file. Type

```
save instance_name:variable_name
```



## Cadence Verilog-A Language Reference

### Using Verilog-A in the Cadence Analog Design Environment

---

*instance\_name* is the full hierarchical name described in step 1 or 2.  
*variable\_name* can be `all`, if you want to prepare to display all variables, or a specific variable name.

Use the following syntax for the hierarchical name of the instance:

```
hier_name ::=  
    [ instance_name{.instance_name}.]HDL_Instance_name
```

Provide *instance\_name* only if the Verilog-A instance is embedded within a hierarchical design.

You find *instance\_name* and *HDL\_Instance\_name* in the schematic editor's Edit Object Properties form. *instance\_name* is the value in the *Instance Name* field. See the following examples of hierarchical instances.

Verilog-A instance below two blocks	—————▶	<code>i7.i2.i3</code>
Verilog-A instance below one block	—————▶	<code>i2.i3</code>

In the previous examples, `i7` and `i2` represent instances of schematic cellviews, and `i3` represents an instance of a Verilog-A cellview.

**Note:** The syntax for internal nodes is

```
save instance_name.internal_node_name
```

See the [Spectre Circuit Simulator User Guide](#) for more information about the `save` statement.

5. Run the simulation.
6. In the simulation control window, choose *Tools – Results Browser*.

The system prompts you for a project directory.

7. Type

```
simulation/design_name/spectre/view_name
```



where *design\_name* is the name of your design and *view\_name* is the name of your cellview.

8. Open the *psf* portion of the output database and search for the variable name you identified for the analysis you ran.

## Cadence Verilog-A Language Reference

### Using Verilog-A in the Cadence Analog Design Environment

- When you find the variable name in the Browser, use the menu option *Plot* (on the middle mouse button) to plot the output from the variable.

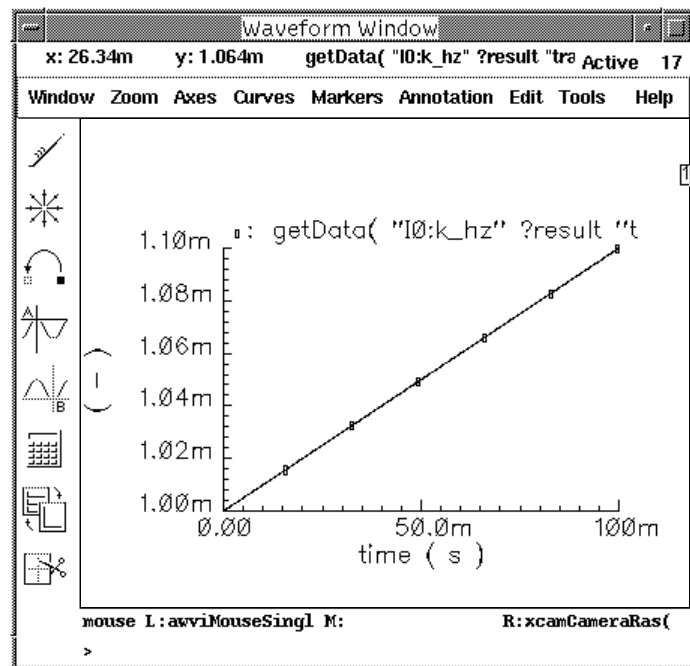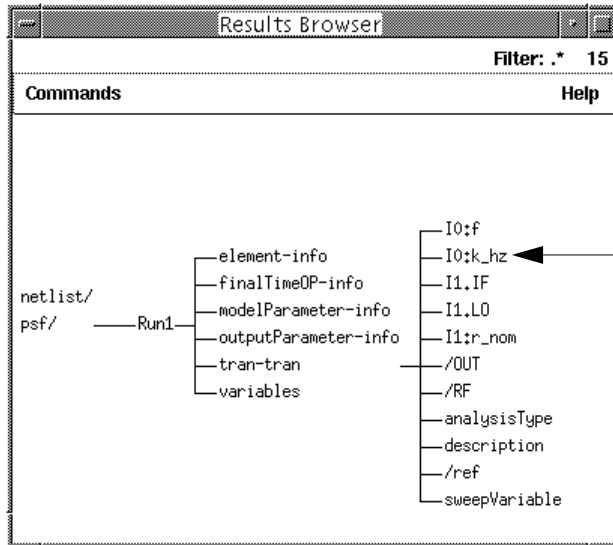

---

## Advanced Modeling Examples

---

This chapter examines in detail several examples that use the Cadence® Verilog®-A language to model complex systems. Two electrical modeling examples are presented first. For an example using Verilog-A to model a mechanical system, see [“Mechanical Modeling”](#) on page 255.

### Electrical Modeling

This section presents examples that illustrate the power and flexibility of Verilog-A when used to model electrical systems. The examples illustrate the analysis and behavioral modeling capabilities of Verilog-A.


- The first example shows how to use Verilog-A to model a rectifier. This example demonstrates how to use Verilog-A in the design of power circuits.
- The second example shows how to create a detailed model of a thin-film transistor using Verilog-A.

### Three-Phase, Half-Wave Rectifier

The following circuit converts the three-phase, AC line voltages into a rectified signal that produces a DC current to drive a motor. The speed of the motor is linearly related to the

amplitude of this current. You can control the amplitude of the current by delaying the thyristor switching.

### Rectifier Circuit

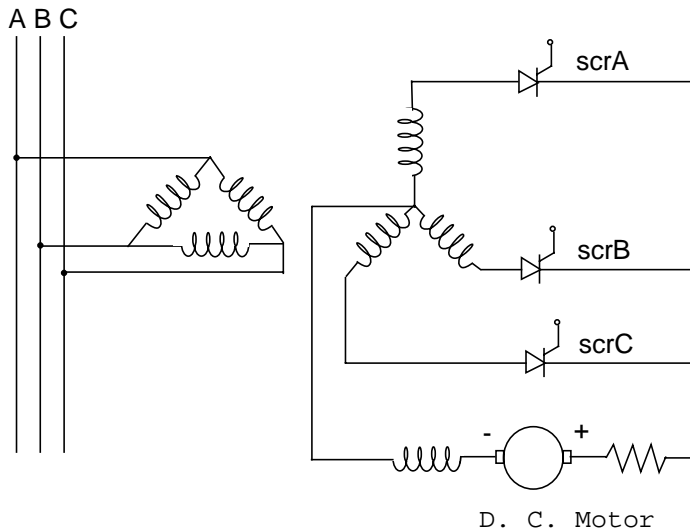

### Operation

To understand the operation of this circuit, consider how the circuit functions if the thyristors are replaced by diodes. All three diodes have the same cathode node. The diodes are nonlinear and their conductance increases with the voltage across them. The diode with the largest anode voltage conducts while the other two stay off.

If the anode voltage of one of the nonconducting diodes rises above that of the conducting diode, the current diverts to the diode with the higher anode voltage. In this way, the voltage at the common cathode always equals the maximum of the diode anode voltages minus the diode voltage drop.

Assuming that the inductance of the load is large, the current flowing in the load remains constant while it switches between the different diodes.

The thyristor differs from the diode in having a third terminal. Unlike the diode, the thyristor does not conduct when its anode voltage exceeds its cathode voltage. To cause the device to conduct, a pulse is required at the gate input of the thyristor. The thyristor continues to conduct current even after this pulse has been removed, as long as the current flowing through it is greater than a hold value.

## Cadence Verilog-A Language Reference

### Advanced Modeling Examples

---

The gate terminal on the thyristor allows the current switching to be delayed with respect to the diode switching points. By delaying the gate pulses, you can vary both the average DC voltage at the output and the average load current.

### Modeling

The following Verilog-A module models the thyristor. The thyristor is modeled as a switch that closes when its gate is activated and opens when the current flowing through it falls below the hold value. When the thyristor is conducting, it has a nonlinear resistance. Without the nonlinearity, the circuit does not function correctly. The nonlinear resistance ensures that the thyristor with the largest anode voltage conducts all the current when its gate is activated.

```
module thyristor(anode, cathode, gate);
input gate;
inout anode, cathode;
electrical anode, cathode, gate;
parameter real vtrigger = 2.0 from [0:inf);
parameter real ihold = 10m from [0.0:inf);
parameter real Rscr = 10;
parameter real Von = 1.3;

    integer thyristorState;
    analog begin

        // get simulator to place a breakpoint when V(gate)
        // rises past vtrigger

        @ ( cross( V(gate) - vtrigger, +1 ) )
            ;

        // get simulator to place a breakpoint when
        // I(anode,cathode) falls below ihold

        @ ( cross( I(anode,cathode) - ihold, -1 ) )
            ;

        // now see if thyristor is beginning to conduct, or
        // is turning off

        if ( V(gate) > vtrigger ) begin
            thyristorState = 1;
        end else if ( I(anode,cathode) < ihold ) begin
            thyristorState = 0;
        end

        // drive output. if conducting, use a non-linear
        // resistance. if not-conducting, then open completely
        // (no current flow)

        if ( thyristorState == 1 ) begin
            V(anode,cathode) <+ I(anode,cathode) *
                Rscr * exp(-V(anode,cathode) );
        end else if ( thyristorState == 0 ) begin
            I(anode,cathode) <+ 0.0;
        end
    end
endmodule
```

## Cadence Verilog-A Language Reference

### Advanced Modeling Examples

---

```
    end  
endmodule
```

The transformers are modeled with the following module, which includes leakage inductance effects:

```
module tformer(inp, inm, outp, outm);  
input inp, inm ;  
output outp ;  
inout outm;  
electrical inp, inm, outp, outm;  
parameter real ratio = 1 from (0:inf);  
parameter real leakL = 1e-3 from [0:inf];  
  
    electrical node1;  
  
    analog begin  
        V(node1, outm) <+ leakL*ddt(I(node1, outm));  
        V(outp, node1) <+ ratio*V(inp, inm);  
    end  
endmodule
```

The module `half_wave` describes the rectifier circuit, which consists of three transformers and three thyristors.

```
`define LK_IND 30m          // leakage inductance  
  
module half_wave( common, out, gnd, inpA, inpB, inpC, gateA, gateB, gateC );  
electrical common, out, gnd, inpA, inpB, inpC, gateA, gateB, gateC;  
parameter real vtrigger = 0.0;  
parameter real ihold = 1e-9;  
parameter integer w1 = 1 from [1:inf];      // num of primary windings  
parameter integer w2 = 1 from [1:inf];      // num of secondary windings  
  
    electrical nodeA, nodeB, nodeC;  
  
    thyristor #(.vtrigger(vtrigger),.ihold(ihold))  
        scrA(nodeA, out, gateA);  
    thyristor #(.vtrigger(vtrigger),.ihold(ihold))  
        scrB(nodeB, out, gateB);  
    thyristor #(.vtrigger(vtrigger),.ihold(ihold))  
        scrC(nodeC, out, gateC);  
  
    tformer #(.ratio(w2/w1),.leakL(`LK_IND)) tA(inpA, gnd,  
        nodeA, common);  
    tformer #(.ratio(w2/w1),.leakL(`LK_IND)) tB(inpB, gnd,  
        nodeB, common);  
    tformer #(.ratio(w2/w1),.leakL(`LK_IND)) tC(inpC, gnd,  
        nodeC, common);  
  
endmodule
```


The first graph in the following figure shows the output voltage waveform (the thick, choppy line) superimposed on the three input voltage waveforms. The second graph displays the thyristor current waveforms and the third graph shows the gate pulses. The current switching

## Cadence Verilog-A Language Reference

### Advanced Modeling Examples

---

occurs past the point where ordinary diodes would switch. This delayed switching reduces the average DC voltage across the load.

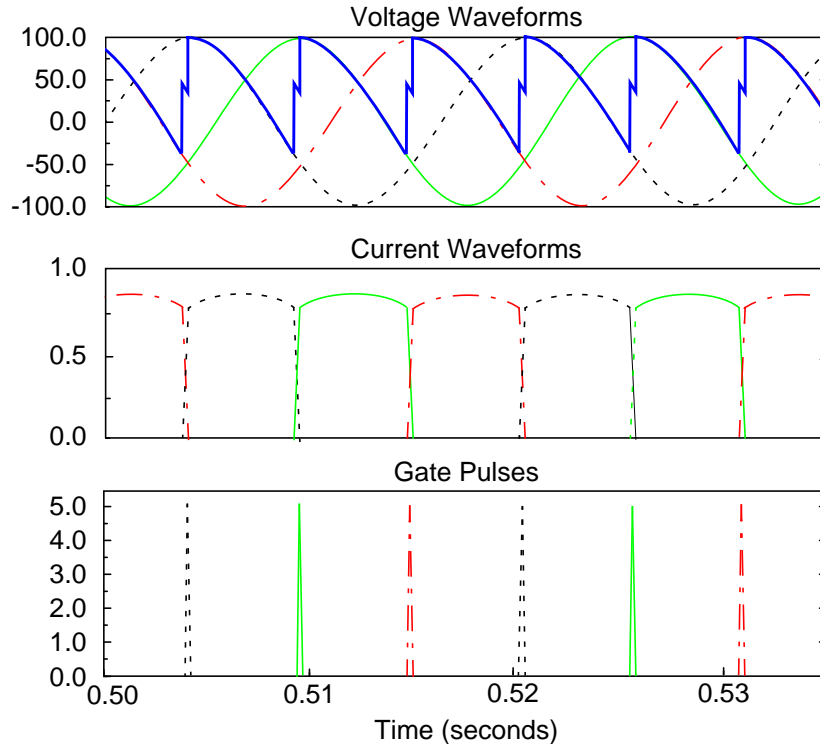

The output voltage stays at an average value for a short time during the switching. This corresponds to the overlap angle in the current waveforms caused by the transformer leakage inductance, which prevents the current in any thyristor from changing instantaneously. During the overlap angle, two thyristors are active, and their cathode voltage is the average of their anode voltages. Eventually, one of the thyristors switches off so that all the current flows through one device.


The current remains almost constant, alternating through the three thyristors. During switching overlap, the current is shared between two thyristors. However, their sum remains almost constant.

## Cadence Verilog-A Language Reference

### Advanced Modeling Examples

The following figure shows the current to the load and the motor speed at startup. The module describing the motor is below the figure. Note how the module defines two internal nodes for speed and armature\_current, which can be plotted as node voltages.

**System Behavior at Startup Time**

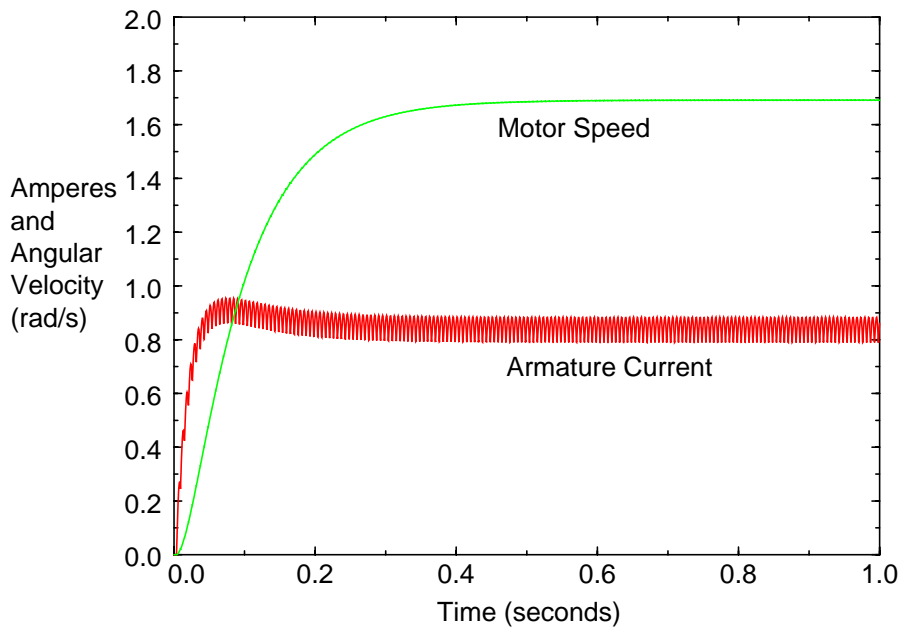

```
module motor(vp, vn, shaft);
inout vp, vn, shaft;
electrical vp, vn;
rotational_omega shaft;
parameter real Km = 4.5 ;    // motor constant [Vs/rad]
parameter real Kf = 6.2 ;    // flux constant [Nm/A]
parameter real j = 0.004 ;   // inertia factor [Nms2/rad]
parameter real D = 0.1 ;     // drag (friction) [NMs/rad]
parameter real Rm = 5.0 ;    // motor resistance [Ohms]
parameter real Lm = 1 ;      // motor inductance [H]

electrical speed;
electrical armature_current;

    analog begin
        V(vp,vn)<+Km*Omega(shaft)+Rm*I(vp,vn)+ ddt(Lm*I(vp, vn));
        Tau(shaft) <+ Kf*I(vp,vn)-D*Omega(shaft)- ddt(j*Omega(shaft));
        V(speed) <+ Omega(shaft);
        V(armature_current) <+ I(vp,vn);
    end
endmodule
```

The Verilog-A modules described are assumed to be in a file called `rectifier_and_motor.va`, which includes the `disciplines.vams` file and the modules listed above in the same order as presented. The following Spectre netlist instantiates all the



## Cadence Verilog-A Language Reference

### Advanced Modeling Examples

---

modules in this design. The motor shaft is left as an open circuit and simulated with no load. All the motor torque goes to overcome the inertia and windage losses. The `errpreset=conservative` statement in the `tran` line directs the simulator to use a conservative set of parameters as convergence criteria.

```
// motor netlist //
global gnd
simulator lang=spectre
ahdl_include "rectifier_and_motor.va"

#define FREQ 60
#define PER 1.0/60
#define DT PER/20 + PER/6
#define VMAX 100
#define STOPTIME 1

vA (inpA gnd) vsource type=sine freq=FREQ ampl=VMAX sinephase=0
vB (inpB gnd) vsource type=sine freq=FREQ ampl=VMAX sinephase=120
vC (inpC gnd) vsource type=sine freq=FREQ ampl=VMAX sinephase=240

vgA (gateA gnd) vsource type=pulse period=PER \
    width=1u val0=0 val1=5 delay=DT
vgB (gateB gnd) vsource type=pulse period=PER \
    width=1u val0=0 val1=5 delay=DT +2*PER/3
vgC (gateC gnd) vsource type=pulse period=PER \
    width=1u val0=0 val1=5 delay=DT +PER/3

rect (gnd out gnd inpA inpB inpC gateA gateB gateC) half_wave

amotor out gnd shaft motor Rm=50 Lm=1 j=0.05 D=0.5 Kf=1.0
saveNodes options save=all
tran tran stop=STOPTIME start=-PER/24 errpreset=conservative
```

## Thin-Film Transistor Model


Verilog-A can support very detailed models of solid-state devices, such as a thin-film MOSFET, or TFT. The following figure shows the physical structure of a four-terminal, thin-film MOSFET transistor. The P-body region of the transistor is assumed to be fully depleted,

## Cadence Verilog-A Language Reference

### Advanced Modeling Examples

---

so both the front and back gate potentials influence channel conductivity. This implementation does not model short-channel effects.

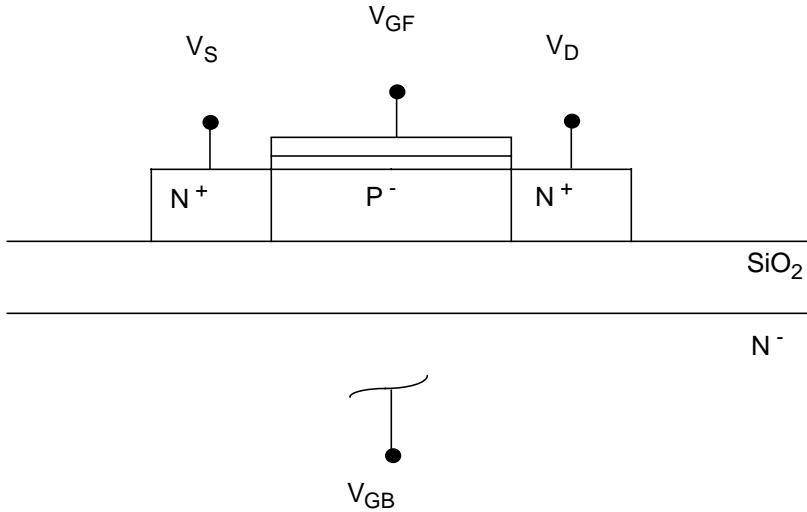

The module definition is

```
`include "disciplines.vams"
`include "constants.vams"

`define CHECK_BACK_SURFACE 1
`define n_type 1
`define p_type 0

// "tft.va"
//
// mos_tft
//
// A fully depleted back surface tft MOSFET model. No
// short-channel effects.
//
// vdrain:      drain terminal      [V,A]
// vgate_front: front gate terminal [V,A]
// vsource:     source terminal     [V,A]
// vgate_back:  back gate terminal  [V,A]
//
//

module mos_tft(vdrain, vgate_front, vsource, vgate_back);
inout vdrain, vgate_front, vsource, vgate_back;
electrical vdrain, vgate_front, vsource, vgate_back;
parameter real length=1 from (0:inf);
parameter real width=1 from (0:inf);
parameter real toxf = 20n;
parameter real toxb = 0.5u;
parameter real nsub = 1e14;
parameter real ngate = 1e19;
parameter real nbody = 5e15;
```

## Cadence Verilog-A Language Reference

### Advanced Modeling Examples

---

```
parameter real tb = 0.1u;
parameter real u0 = 700;
parameter real lambda = 0.05;
parameter integer dev_type=`n_type;

real
    id,
    vgfs,
    vds,
    vgbs,
    vdsat;

real
    phi, // body potential.
    vfbf, // flat-band voltage - front channel.
    vfbb, // flat-band voltage - back channel.
    vtfa, // threshold voltage - back channel accumulated.
    vgba, // vgb for accumulation at back surface.
    vgbi, // vgb for inversion at back surface.
    vtff, // threshold voltage.
    wkf, // work-function, front-channel.
    wkb, // work-function, back-channel.
    alpha, // capacitance ratio.
    cob, // capacitance back-gate to body.
    cof, // capacitance front-gate to body.
    cb, // body intrinsic capacitance.
    cbb, // series body / back-gate capacitance.
    cfb, // series front-gate / body capacitance.
    cfbb, // series front-gate / body / back-gate capacitance.
    qb, // fixed depleted body charge.
    kp, // K-prime.
    qgf, // front-gate charge.
    qgb, // back-gate charge.
    qn, // channel charge.
    qd, // drain component of channel charge.
    qs; // source component of channel charge.

integer back_surf;
real Vt, eps0, charge, boltz, ni, eps0x, epsil;
real tmp1;
integer dev_type_sign;

analog begin

// perform initializations here

@ ( initial_step or initial_step("static") ) begin

    if( dev_type == `n_type ) dev_type_sign = 1;
    else dev_type_sign = -1;

    ni = 9.6e9; // 1/cm^3

    eps0x = 3.9*`P_EPS0;
    epsil = 11.7*`P_EPS0;

    phi = 2*$vt*ln(nbody/ni);
    wkf = $vt*ln(ngate/ni) - phi/2;
    wkb = $vt*ln(nsub/ni) - phi/2;
```

## Cadence Verilog-A Language Reference

### Advanced Modeling Examples

---

```
vfbf = wkf;           // front-channel fixed charge assumed zero.
vfbb = wkb;           // back-channel fixed charge assumed zero.
qb = charge*nbody*1e6*tb;
cob = epsox/toxb;
cof = epsox/toxf;
cb = epsil/tb;
cbb = cob*cb/(cob + cb);
cfb = cof*cb/(cof + cb);
cfbb = cfb*cob/(cfb + cob);
alpha = cbb/cof;

vtfa = vfbf + (1 + cb/cof)*phi - qb/(2*cof);
vgba = dev_type_sign*vfbb - phi*cb/cob - qb/(2*cob);
vgbi = dev_type_sign*vfbb + phi - qb/(2*cob);

kp = width*u0*1e-4*cof/length;

back_surf = 0;

end    // of initial_step code

// the following code is executed at every iteration

vgfs = dev_type_sign*V(vgate_front, vsource);
vds = dev_type_sign*V(vdrain, vsource);
vgbs = dev_type_sign*V(vgate_back, vsource);

// calc. threshold and saturation voltages.
//
vtff = vtfa - (vgbs - vgba)*cbb/cof;
vdsat = (vgfs - vtff)/(1 + alpha);

//
// drain current calculations.
//
if (vgfs < vtff) begin

    //
    // front-channel in accumulation / cutoff region(s).
    //
    id = 0;
    qn = 0;
    qd = 0;
    qs = 0;
    qgf = width*length*cfbb*(vgfs - wkf - qb/(2*cbb)
        - (vgbs - vfbb + qb/(2*cob)));
    qgb = - (qgf + width*length*qb);

end else if (vds < vdsat) begin

    //
    // front-channel in linear region.
    //
    id = kp*((vgfs - vtff)*vds - 0.5*
        (1 + cbb/cof)*vds*vds);
    id = id*(1 + lambda*vds);
    tmp1 = (1 + alpha)*vds;
    qn = -width*length*cof*(vgfs - vtff - tmp1/2 +
        tmp1*tmp1/(12*(vgfs - vtff - tmp1/2)));
    qd = 0.4*qn;
    qs = 0.6*qn;
```

## Cadence Verilog-A Language Reference

### Advanced Modeling Examples

---

```
    qgf = width*length*cof*(vgfs - wkf - phi - vds/2 +
        tmp1*vds/ (12*(vgfs - vtff - tmp1/2)));
    qgb = - (qgf + qn + width*length*qg);

end else begin

    //
    // front-channel in saturation.
    //
    id = 0.5*kp*(pow((vgfs - vtff), 2))/(1 + cbb/cof);
    id = id*(1 + lambda*vds);
    qn = -width*length*cof*(2.0/3.0)*(vgfs - vtff);
    qd = 0.4*qn;
    qs = 0.6*qn;
    qgf = width*length*cof*(vgfs - wkf - phi -
        ((vgfs - vtff)/(3*(1 + alpha))));
    qgb = - (qgf + qn + width*length*qg);

end

//
// intrinsic device.
//
I(vdrain, vsource) <+ dev_type_sign*id;
I(vdrain, vgate_back) <+ dev_type_sign*ddt(qd);
I(vsource, vgate_back) <+ dev_type_sign*ddt(qs);
I(vgate_front, vgate_back) <+ dev_type_sign*ddt(qgf);

//
// check back-surface constraints. save the state
// in the back_surf variable. at the final step of
// the $analysis, use back_surf to
// print out any possible violations.
//
if (vgbs > vgbi && !back_surf) begin
    back_surf = 1;
end else if (vgbs < vgba && !back_surf) begin
    back_surf = 2;
end

@ ( final_step ) begin
    if (back_surf == 1) begin
        $display("Back-surface went into inversion.\n");
    end else if (back_surf == 2) begin
        $display("Back-surface went into accumulation.\n");
    end
end

end
endmodule
```

## Cadence Verilog-A Language Reference

### Advanced Modeling Examples

---

The netlist file instantiates an n-channel TFT device with a width of 2 microns ( $2\mu$ ) and a length of 1 micron ( $1\mu$ ). The drain-source voltage ( $v_{ds}$ ) sweeps from 0 to 5 volts.

```
// thin-film transistor example netlist file
//

global gnd
simulator lang=spectre

#define n_type 1

ahdl_include "tft.va"

// Devices
M1_n drain gate source back_gate mos_tft length=1u width=2.5u dev_type=n_type

// Sources
vds drain source vsource dc=5
vbs back_gate source vsource dc=-3
vgs gate source vsource dc=3


saveOp options save=all currents=all

// Analyses
dcsweep dc start=0 stop=5 step=.1 dev=vds
```

Repeating this sweep for different front gate voltages ( $v_{gs}$ ) with the source gate potential and back gate potential held constant results in the set of I-V characteristics shown in the [I-V Characteristics of the Thin-Film Transistor \(TFT\) Module](#) figure on page 255.

### I-V Characteristics of the Thin-Film Transistor (TFT)

Drain Current (amps)

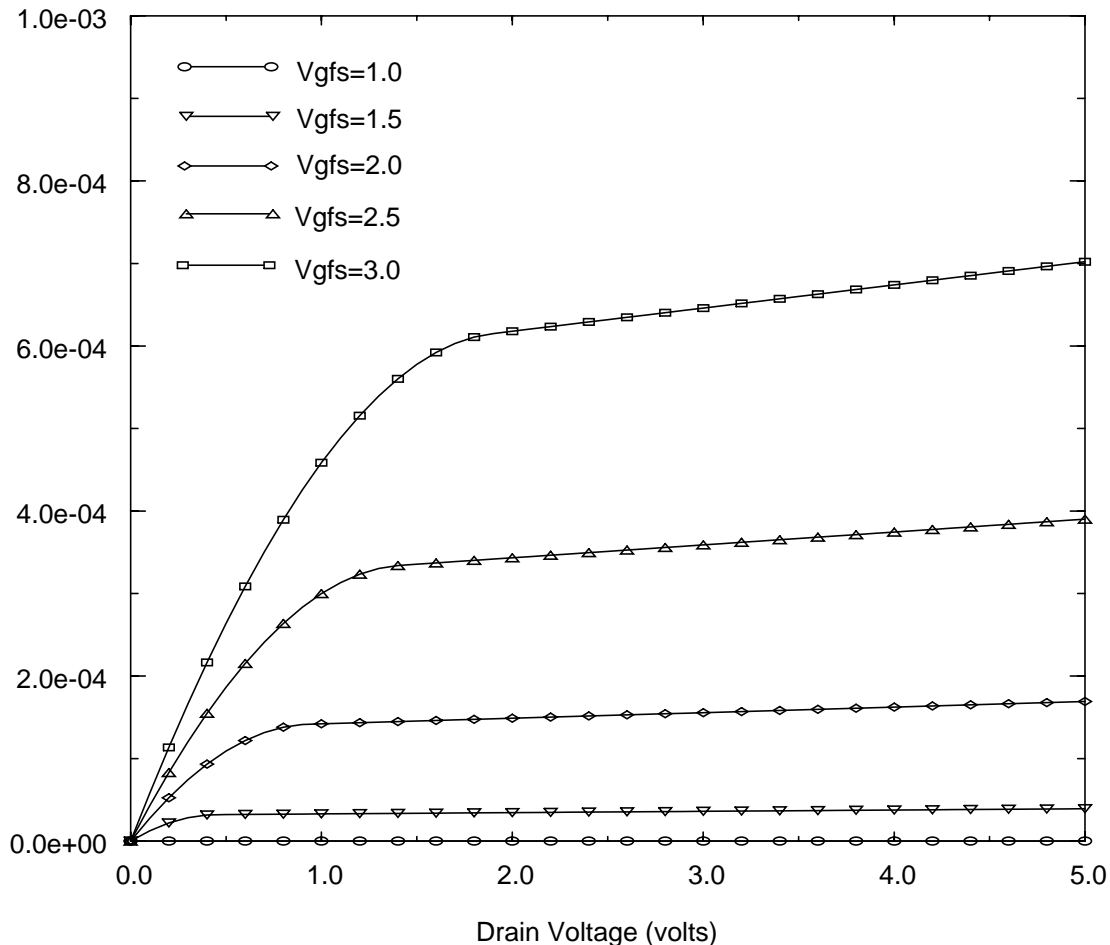

## Mechanical Modeling

Verilog-A supports multidisciplinary modeling. You can write models representing thermal, chemical, electrical, mechanical, and optical systems and use them together.

This section presents two examples that illustrate the flexibility and power of Verilog-A.


- The first example is a mechanical model of a car wheel on a bumpy road with run-time binding applied to represent the real-world limits of automobile suspensions.

- The second example shows how to create a model of two gears using Verilog-A.

For examples illustrating how Verilog-A can be used to model electrical systems, see [“Electrical Modeling”](#) on page 243.

## Car on a Bumpy Road

This example simulates a car traveling at a fixed speed on a road with a bump in it. This example uses a simple model of a car as a sprung mass.

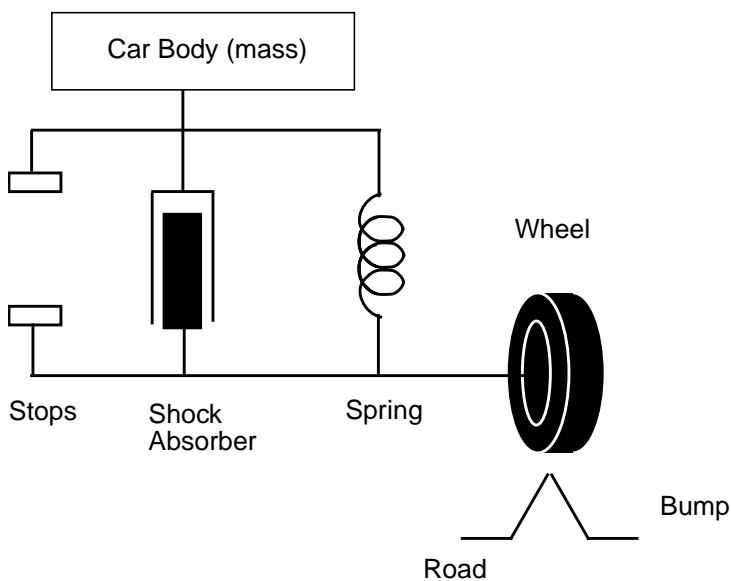

The equations are formulated with three nodes, one representing the road, one representing the axle, and the third representing the car frame. The potential of each node is its vertical position. The flow out of the nodes is force, which must sum to zero by Kirchhoff's Flow Law.

Verilog-A behavioral descriptions can model the body mass, the spring, the shock absorber, and a triangular shaped bump taken at a particular speed, as well as the car wheel and suspension. The odd mix of units shows how Verilog-A supports arbitrary quantities and units.

### Spring

The spring is a simple linear spring.

```
// spring.va

`include "disciplines.vams"
`include "constants.vams"
```



## Cadence Verilog-A Language Reference

### Advanced Modeling Examples

---

```
module spring (posp, posn);
  inout posp, posn;
  kinematic posp, posn;
  parameter real k = 5000; // spring constant in lbs/ft
  parameter real l = 0.5; // length of spring in feet

  analog
    F(posp,posn) <+ k*(Pos(posp,posn) - l/12.0);

endmodule
```

### Shock Absorber

The shock absorber is a simple linear damper.

```
// damper.va

`include "disciplines.vams"
`include "constants.vams"

module damper (posp, posn);
  inout posp, posn;
  kinematic posp, posn;
  parameter real d = 1000; // friction coef in lbs-s/ft

  analog
    F(posp,posn) <+ d*ddt(Pos(posp,posn));

endmodule
```

### Frame

The frame is modeled as a mass with inertia that is acted on by gravity.

```
// mass.va

`include "disciplines.vams"
`include "constants.vams"

module mass (posin);
  inout posin;
  kinematic posin;
  parameter real m = 1000; // mass given in lbs-mass

  kinematic vel;
  analog begin
    Pos(vel) <+ ddt(Pos(posin));
    F(posin) <+ m*ddt(Pos(vel)/32); // acceleration
    F(posin) <+ m;
  end
endmodule
```

## Road

The road is modeled as flat, with one or more triangular-shaped obstacles.

The `initial_step` section computes numbers that depend only on input parameters, which is more efficient than doing the calculations in the analog block.

```
// road.va

`include "disciplines.vams"
`include "constants.vams"

module triangle (posin);
  inout posin;
  kinematic posin;
  parameter real height = 4 from (0:inf);    // height of bumps(inches)
  parameter real width = 12 from (0:inf);    // width of bumps(inches)
  parameter real speed = 55 from (0:inf);    // speed (mph)
  parameter real distance = 0 from [0:inf];  // distance to first bump (feet)
  real duration, offset, Time;

  analog begin

    @ ( initial_step ) begin
      duration = width / (12*1.466667 * speed);
      offset = distance / (1.466667 * speed);
    end

    Time = $realtime - offset;
    if (Time < 0) begin
      Pos(posin) <+ 0;
      @ ( timer( offset ) )
        ; // do nothing, merely place breakpoint
    end else if (Time < duration/2) begin
      Pos(posin) <+ height/6 * Time / duration;
      @ ( timer ( duration / 2 + offset ) )
        ; // do nothing
    end else if (Time < duration) begin
      Pos(posin) <+ height/6 * (1 - Time / duration);
      @ ( timer ( duration + offset ) )
        ; // do nothing
    end else begin
      Pos(posin) <+ 0;
    end
  end
endmodule
```

## Limiter


The limiter models the limited travel of an automotive suspension using the run time binding of potential and flow sources to implement the mechanical constraints (the stops) in the suspension.

## Cadence Verilog-A Language Reference

### Advanced Modeling Examples

---

The limiter keeps the distance between two points inside a certain range by placing a rigid constraint on the distance. However, within the range, the limiter has no effect. A plot of force versus position is as follows.

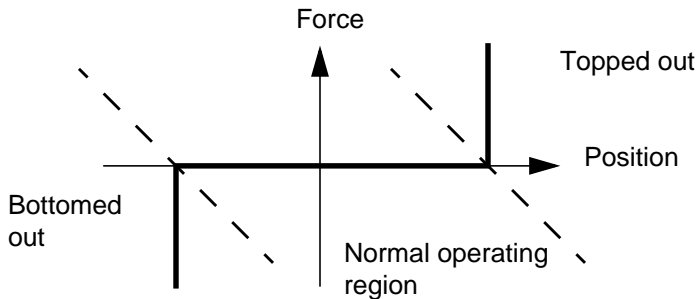

This model uses length to determine which region the limiter is in. If the length is less than `maxl` and greater than `minl`, the model must be in the normal operating region. If the length is less than or equal to `minl`, the limiter has bottomed out. However, because of the limiting, the length cannot be less than `minl`, so the limiter bottoms out if the length equals `minl`. This is a dangerous test. Any error in the calculation causes the limiter to jump back and forth from the normal region to being bottomed out. The model is abruptly discontinuous at the region boundaries.

Continually crossing from one region to another causes the simulator to run slowly and can create convergence difficulties. For this reason, the region boundaries used are those given by the dotted lines in the figure. Both position and force are taken into account when determining which region the limiter is in. This is a much more reliable method for determining the operating region of the limiter.

```
// limiter.va

`include "disciplines.vams"
`include "constants.vams"

module limiter (posp, posn);
  inout posp, posn;
  kinematic posp, posn;
  parameter real minl = 2; // minimum extension in inches
  parameter real maxl = 10; // maximum extension in inches
  integer out_of_range;
  integer too_long, too_short;

  analog begin
    if (Pos(posp,posn) - maxl/12 + F(posp,posn) / 10.0e3 > 0.0) begin
      Pos(posp,posn) <+ maxl/12;
      too_long = 1;
      too_short = 0;
    end else if (Pos(posp,posn) - minl/12 + F(posp,posn) / 10.0e3 < 0.0) begin
      Pos(posp,posn) <+ minl/12;
      too_long = 0;
      too_short = 1;
    end else begin
      F(posp,posn) <+ 0;
    end
  end
endmodule
```

## Cadence Verilog-A Language Reference

### Advanced Modeling Examples

---


```
        too_long = 0;
        too_short = 0;
    end
    if (out_of_range) begin
        if (!too_long && !too_short) begin
            out_of_range = 0;
            $strobe( "%M: In range again at t = %E s.\n", $realtime );
        end
    end else begin
        if (too_long) begin
            $strobe( "%M: Topped out at t = %E s.\n", $realtime );
            out_of_range = 1;
        end
        else if (too_short) begin
            $strobe( "%M: Bottomed out at t = %E s.\n", $realtime );
            out_of_range = 1;
        end
    end
end
end
endmodule
```

When the limiter changes from one region to another, the simulator prints messages.

This module can be difficult to debug because it is abruptly discontinuous. One approach to this problem is to reduce the strength of the module by putting a small resistor in series with the limiter. The resistor lets the Spectre<sup>®</sup> circuit simulator converge, so you can use the normal printing and plotting aids for debugging. Once the limiter is behaving properly, you can remove the resistor.

### Wheel

The important effect being modeled with the wheel is that it can lift off the ground. Dynamic binding is used to model the fact that the wheel can push on the ground, but it cannot pull. In addition, the elasticity of the wheel is modeled. The force-versus-position characteristics of the wheel are shown with the module definition as follows.

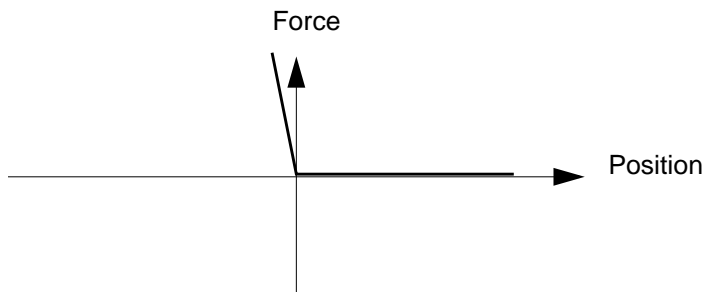

```
// wheel.va

`include "disciplines.vams"
`include "constants.vams"

module wheel (posp, posn);
```

## Cadence Verilog-A Language Reference

### Advanced Modeling Examples

---

```
inout posp, posn;
kinematic posp, posn;
parameter real height = 0.5 from (0:inf);
integer reported;
integer flying;

    analog begin
        if (Pos(posp,posn) < height) begin
            Pos(posp,posn) <+ height + F(posp,posn) / 200K;
            flying = 0;
        end else begin
            F(posp,posn) <+ 0;
            flying = 1;
        end
        if (reported) begin
            if (!flying) begin
                reported = 0;
                $strobe( "%M: On ground again at t = %E s.\n", $realtime );
            end
        end else begin
            if (flying) begin
                $strobe( "%M: Airborne at t = %E s.\n", $realtime );
                reported = 1;
            end
        end
    end
end
endmodule
```

### The System

Two nodes are used to model the automobile, one for the frame and one for the axle. Another node is used to model the surface of the road. The potential of all three nodes is the vertical position, with up being positive. The flow at the nodes is force, with upward forces being positive.

## Cadence Verilog-A Language Reference

### Advanced Modeling Examples

---

The car is driven over 1-, 3-, and 6-inch triangular obstacles at 55 miles per hour. The vertical position of the frame, axle, and road and the force on the road are plotted versus time for the 6-inch obstacle.

```
// netlist for Car on bumpy road
simulator lang=spectre
spectre options quantities=full save=all

// include Verilog-A models
ahdl_include "mass.va"
ahdl_include "spring.va"
ahdl_include "limiter.va"
ahdl_include "damper.va"
ahdl_include "wheel.va"
ahdl_include "road.va"

// describe sprung mass on bumpy road
Body    frame      mass m=2.5klbs
Spring  frame axle  spring k=5k l=9
Shock   frame axle  damper d=700
Stops    frame axle limiter minl=1 maxl=5
Wheel   axle  road  wheel
Bump     road      triangle height=1_in width=24_in speed=55_mph

nodeset frame=0 axle=0


// perform transient analysis
bump tran stop=1 errpreset=conservative
higher alter dev=Bump param=height value=3_in
whack tran stop=1 errpreset=conservative
andLarger alter dev=Bump param=height value=6_in
launch tran stop=1 errpreset=conservative
```

During the simulation of the 6-inch obstacle, the Spectre simulator prints results that contain messages from the limiter and the wheel that indicate when they changed regions.

```
*****
Transient Analysis `launch': time=(0 s -> 1 s)
*****

Stops: Bottomed out at t = 7.292152e-03 s.
Stops: In range again at t = 1.941606e-02 s.
Wheel: Airborne at t = 1.957681e-02 s.
Stops: Topped out at t = 1.163974e-01 s.
Wheel: On ground again at t = 4.493263e-01 s.
Stops: In range again at t = 4.507094e-01 s.
Stops: Bottomed out at t = 5.197922e-01 s.
Stops: In range again at t = 5.755469e-01 s.
```


## Transient Response in Car on a Bumpy Road

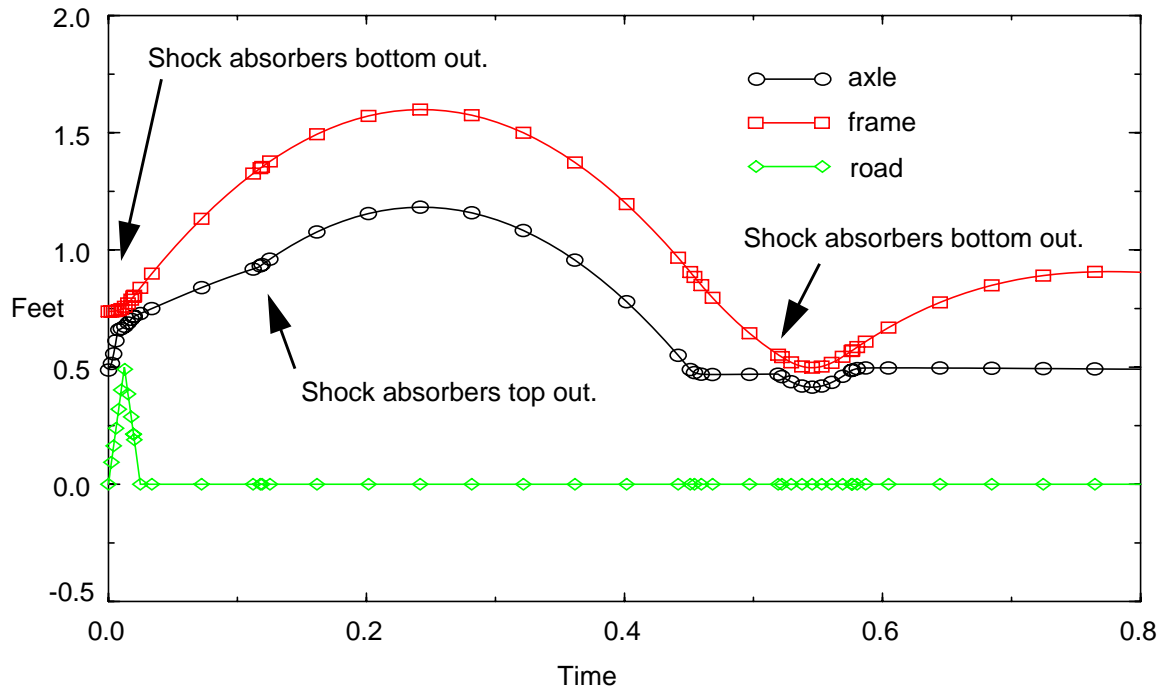

Looking at this plot, you can visualize the car flying into the air, with its wheels drooping below it, then the wheels and the car slamming into the ground. The weight of the car flattens the tires at 0.55 seconds.

## Gearbox

This Verilog-A module models a gearbox that consists of two shafts and two gears. The model is bidirectional, meaning that either shaft can be driven, and the loading is passed from the driven shaft to the driving shaft. Inertia in each gear and shaft is also modeled.

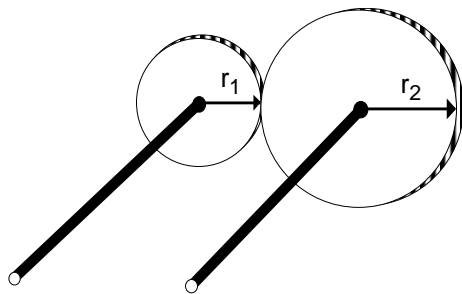

In this example, you choose the variables with which to formulate the model. Then you develop the constitutive relationships and convert the constitutive relationships into a Verilog-A module.

## Choosing the Variables

The gearbox connects to the rest of the system through shafts. A module connects to the rest of a network through terminals. Here the module is formulated with the shafts as the terminals of the module. The important quantities of the shafts are their angular velocities (frequency) and the torques they exert on the rest of the system. Both quantities (frequency and torque) are associated with each shaft. In this case, angular velocity or frequency is the natural choice for potential because it satisfies Kirchhoff's Potential Law. Angular velocity must satisfy Kirchhoff's Potential Law because it is the derivative of angular position, which clearly satisfies Kirchhoff's Potential Law (a complete rotation sums to zero). Torque is the natural choice for flow because it satisfies Kirchhoff's Flow Law.

## Choosing the Reference Directions

Torque is considered positive if it accelerates a gear in a counterclockwise direction. Likewise, angular velocity is positive in the counterclockwise direction. Torque (the flow) is taken to be positive if it flows from outside the module, through the shaft, into the gearbox. In this example, both frequency and torque are specified in absolute terms, meaning that all measurements are relative to ground (the resting state).

## The Physics

There are three sources of torque on each shaft:

- The torque applied externally through the shaft
- The torque applied from the other gear through the teeth of the gear on the shaft
- The torque needed to accelerate the inertia of the shaft and gear

These torques must balance:

$$\tau_{ext} + \tau_{teeth} + \tau_{inertia} = 0$$

or

$$\tau_{ext} + rF_{teeth} + I\alpha = 0$$



where  $r$  is the radius of the gear,  $I$  is the inertia of the gear and shaft, and  $\alpha$  is the angular acceleration. The angular acceleration is given by


$$\alpha = \frac{d\omega}{dt}$$

$$\omega = \frac{d\theta}{dt}$$

where  $\omega$  is the angular velocity and  $\theta$  is the angular position or phase of the shaft.

To simplify the development of the model, assume that the gears and shaft have no inertia.

To show the interaction of the two gears, the following figure peels the gear teeth from the circular gear and flattens them. This allows the equations to be formulated in rectangular coordinates.

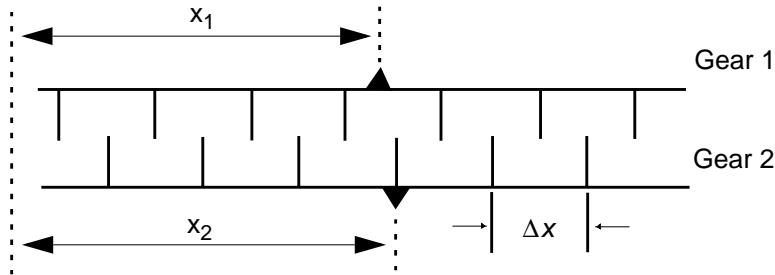

The translational position of the gear teeth is related to the angular position of the gear by

$$x_1 = 2\pi r_1 \theta_1$$

Because gear 2 rotates backwards

$$x_2 = -2\pi r_2 \theta_2$$

Assume that the teeth mesh perfectly, so that the gearbox does not exhibit backlash. Then the positions of both gears must match.

$$x_1 = x_2$$

or

$$2\pi r_1 \theta_1 = -2\pi r_2 \theta_2$$

This can be rewritten to explicitly give  $\theta_1$  in terms of  $\theta_2$ .

$$\theta_1 = -\frac{r_2}{r_1} \theta_2 \quad (\text{phase})$$

The torque on the shaft due to the interaction of the teeth can be computed from the force at the teeth with

$$\tau = rF$$

At the point of contact of the two gears, the forces must balance

$$F_1 = -F_2$$

or

$$\frac{\hat{\tau}_1}{r_1} = \frac{\hat{\tau}_2}{r_2}$$

where  $\hat{\tau}_1$  and  $\hat{\tau}_2$  are the torques applied to the shafts by the external system, assuming that the gear and shaft have no inertia.

$$\hat{\tau}_2 = \frac{r_2}{r_1} \hat{\tau}_1 \quad (\text{torque})$$

Finally, the effect of the inertia of the gear and shaft is added.

$$\tau = \hat{\tau} + I\alpha$$

where  $\tau$  is the total torque applied externally to the shaft,  $\hat{\tau}$  is the torque used to push the other gear, and  $I\alpha$  is the torque required to accelerate the inertia of the shaft and gear. The torque equation can now be rewritten to include the effect of inertia:

$$\tau_2 = I_2\alpha_2 - \frac{r_2}{r_1}(\tau_1 - I_1\alpha_1) \quad (\text{full torque})$$

## Implementation of the Gearbox Model

The phase and full torque equations are the constitutive equations for the gearbox. The natures for velocity (omega) and torque (tau) are defined in the `disciplines.vams` file.

```
// gearbox.va
```

```
`include "disciplines.vams"
`include "constants.vams"

module gearbox(wshaft1, wshaft2);
  inout wshaft1, wshaft2;
  rotational_omega wshaft1, wshaft2;
  parameter real radius1=1 from (0:inf);
  parameter real inertial1=0 from [0:inf);
  parameter real radius2=1 from (0:inf);
  parameter real inertia2=0 from [0:inf);

  analog begin
```

## Cadence Verilog-A Language Reference

### Advanced Modeling Examples

---

```
//  
// Calculate the angular velocity of shaft1 from  
// that of shaft2  
//  
Omega( wshaft1 ) <+ Omega( wshaft2 ) * radius2 / radius1;  
  
// Calculate the torque on shaft1 from the torque  
// on shaft2 and the angular acceleration.  
//  
Tau( wshaft2 ) <+ inertia2 * ddt( Omega( wshaft2 ) )  
                  + (Tau( wshaft1 ) - inertial *  
                    ddt( Omega( wshaft1 ) ))  
                  * (radius2 / radius1);  
  
end  
endmodule
```


A system constructed from Spectre simulator primitives quickly tests this module. A current source and resistor model a motor, and a resistor models a load. The rotational nodes, s1 and s2, represent shafts.

```
// Gearbox test system netlist file  
simulator lang=spectre  
  
ahdl_include "gearbox.va"  
  
P1 s1 0 isource type=pwl wave=[0 0 1 1]  
P2 s1 0 resistor r=1  
GB1 s1 s2 gearbox radius1=2 inertia1=0.2 inertia2=0.1  
L1 s2 0 resistor r=1  
  
timeResp tran stop=2  
  
modifyOmega quantity name="Omega" abstol=1e-4  
modifyTau quantity name="Tau" abstol=1e-4
```

The motor drives the gearbox with a finite slope step change in torque.

### Transient Response of the Gearbox

Rotational Velocity

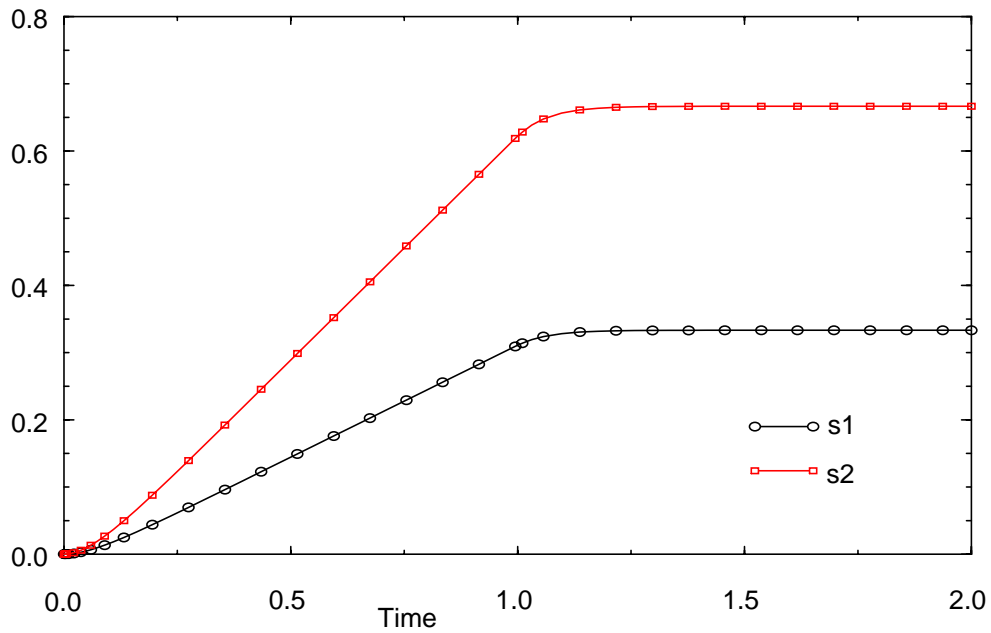

---

## Nodal Analysis

---

This appendix briefly introduces Kirchhoff's Laws and describes how the simulator uses them to simulate a system. For information, see

- [Kirchhoff's Laws](#) on page 270
- [Simulating a System](#) on page 271

## Kirchhoff's Laws

Simulation of Verilog<sup>®</sup>-A language modules is based on two sets of relationships. The first set, called the *constitutive relationships*, consists of formulas that describe the behavior of each component. Some formulas are supplied as built-in primitives. You provide other formulas in the form of module definitions.

The second set of relationships, the *interconnection relationships*, describes the structure of the network. This set, which contains information on how the nodes of the components are connected, is independent of the behavior of the constituent components. Kirchhoff's laws provide the following properties relating the quantities present on the nodes and on the branches that connect the nodes.

### ■ Kirchhoff's Flow Law


The algebraic sum of all the flows out of a node at any instant is zero.

### ■ Kirchhoff's Potential Law


The algebraic sum of all the branch potentials around a loop at any instant is zero.

These laws assume that a node is infinitely small so that there is negligible difference in potential between any two points on the node and a negligible accumulation of flow.

### Kirchhoff's Laws

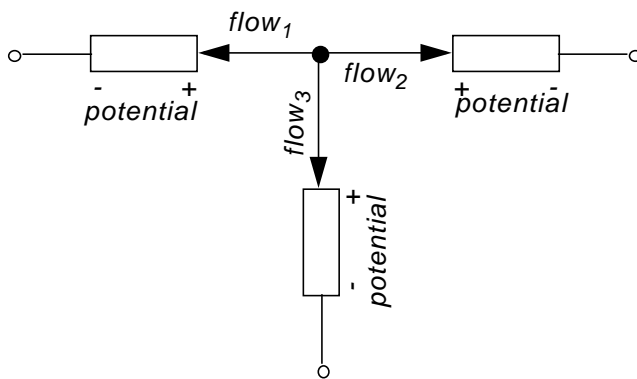

$$flow_1 + flow_2 + flow_3 = 0$$

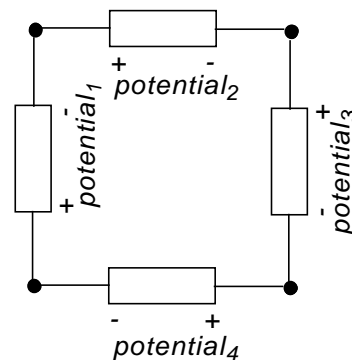

$$potential_1 + potential_2 + potential_3 + potential_4 = 0$$

## Simulating a System

To describe a network, simulators combine constitutive relationships with Kirchhoff's laws in *nodal analysis* to form a system of differential-algebraic equations of the form

$$f(v, t) = \frac{dq(v, t)}{dt} + i(v, t) = 0$$

$$v(0) = v_0$$

These equations are a restatement of Kirchhoff's Flow Law.

$v$  is a vector containing all node potentials.

$t$  is time.

$q$  and  $i$  are the dynamic and static portions of the flow.

$f$  is a vector containing the total flow out of each node.

$v_0$  is the vector of initial conditions.

## Transient Analysis

The equation describing the network is differential and nonlinear, which makes it impossible to solve directly. There are a number of different approaches to solving this problem numerically. However, all approaches break time into increments and solve the nonlinear equations iteratively.

The simulator replaces the time derivative operator ( $dq/dt$ ) with a discrete-time finite difference approximation. The simulation time interval is discretized and solved at individual time points along the interval. The simulator controls the interval between the time points to ensure the accuracy of the finite difference approximation. At each time point, the simulator solves iteratively a system of nonlinear algebraic equations. Like most circuit simulators, the Spectre uses the Newton-Raphson method to solve this system.

## Convergence

In Verilog-A, the behavioral description is evaluated iteratively until the Newton-Raphson method converges. (For a graphical representation of this process, see [“Simulator Flow”](#) on page 29.) On the first iteration, the signal values used in Verilog-A expressions are approximate and do not satisfy Kirchhoff's laws.

In fact, the initial values might not be reasonable; so you must write models that do something reasonable even when given unreasonable signal values.

For example, if you compute the log or square root of a signal value, some signal values cause the arguments to these functions to become negative, even though a real-world system never exhibits negative values.

As the iteration progresses, the signal values approach the solution. Iteration continues until two convergence criteria are satisfied. The first criterion is that the proposed solution on this iteration,  $v_n^{(j)}(t)$ , must be close to the proposed solution on the previous iteration,  $v_n^{(j-1)}(t)$ , and

$$\left| v_n^{(j)} - v_n^{(j-1)} \right| < reltol \left( \max \left( \left| v_n^{(j)} \right|, \left| v_n^{(j-1)} \right| \right) \right) + abstol$$

where *reltol* is the relative tolerance and *abstol* is the absolute tolerance.

*reltol* is set as a simulator option and typically has a value of 0.001. There can be many absolute tolerances, and which one is used depends on the resolved discipline of the net. You set absolute tolerances by specifying the *abstol* attribute for the natures you use. The absolute tolerance is important when  $v_n$  is converging to zero. Without *abstol*, the iteration never converges.

The second criterion ensures that Kirchhoff's Flow Law is satisfied:

$$\left| \sum_n f_n(v^{(j)}) \right| < reltol(\max(|f_n^i(v^{(j)})|)) + abstol$$

where  $f_n^i(v^{(j)})$  is the flow exiting node *n* from branch *i*.

Both of these criteria specify the absolute tolerance to ensure that convergence is not precluded when  $v_n$  or  $f_n(v)$  go to zero. While you can set the relative tolerance once in an options statement to work effectively on any node in the circuit, you must scale the absolute tolerance appropriately for the associated branches. Set the absolute tolerance to be the largest value that is negligible on all the branches with which it is associated.

The simulator uses absolute tolerance to get an idea of the scale of signals. Absolute tolerances are typically 1,000 to 1,000,000 times smaller than the largest typical value for signals of a particular quantity. For example, in a typical integrated circuit, the largest potential is about 5 volts; so the default absolute tolerance for voltage is 1  $\mu$ V. The largest current is about 1 mA; so the default absolute tolerance for current is 1 pA.



---

## Analog Probes and Sources

---

This appendix describes what analog probes and sources are and gives some examples of using them. For information, see

- [Probes](#) on page 274
- [Sources](#) on page 275

For examples, see

- [Linear Conductor](#) on page 280
- [Linear Resistor](#) on page 281
- [RLC Circuit](#) on page 281
- [Simple Implicit Diode](#) on page 281

## Overview of Probes and Sources

A *probe* is a branch in which no value is assigned for either the potential or the flow, anywhere in the module. A *source* is a branch in which either the potential or the flow is assigned a value by a contribution statement somewhere in the module.

You might find it useful to describe component behavior as a network of probes and sources.


- It is sometimes easier to describe a component first as a network of probes and sources, and then use the rules presented here to map the network into a behavioral description.
- A complex behavioral description is sometimes easier to understand if it is converted into a network of probes and sources.

The probe and source interpretation provides the additional benefit of unambiguously defining what the response will be when you manipulate a signal.

## Probes


A *flow probe* is a branch in which the flow is used in an expression somewhere in the module. A *potential probe* is a branch in which the potential is used. You must not measure both the potential and the flow of a probe branch.

The equivalent circuit model for a potential probe is



The branch flow of a potential probe is zero.

The equivalent circuit model for a flow probe is



The branch potential of a flow probe is zero.

A port branch, which is a special form of a flow probe, measures the flow into a port rather than across a branch. When a port is connected to numerous branches, using a port branch provides a quick way of summing the flow.


## Port Branches

You can declare a *port branch* by specifying a port node twice in a branch declaration. For example, module `portex` declares a port branch called `portbranch`.


```
module portex (inport , outport) ;  
electrical inport, outport ;  
branch (outport,outport) portbranch;           // Declares port branch  
endmodule
```

The difference between a port branch and a simple port can be illustrated schematically as follows:

### Simple port

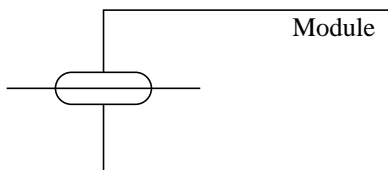

### Port branch

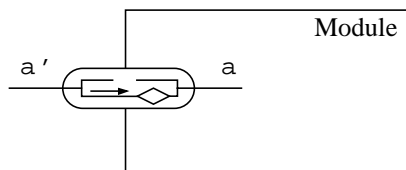

In the simple port, the two sides of the port are indistinguishable. In the port branch, the two terminals of the port, `a'` and `a`, are distinguishable, so that a flow probe can be implemented across them. Establishing a flow probe is all you can do with a port branch—you cannot set the flow, nor can you read or set the potential.

You can use a port branch to monitor the flow. In the following example, the simulator issues a warning if the current through the `anode` port branch becomes too large.


```
module diode (a, c) ;  
electrical a, c ;  
branch (a, c) diode, cap ;  
branch (a, a) anode ; // Declares a port branch  
parameter real is=1e-14, tf=0, cjo=0, imax=1, phi=0.7 ;  
  
analog begin  
    I(diode) <+ is*($limexp(V(diode)/$vt) - 1) ;  
    I(cap) <+ ddt(tf*I(diode) - 2 * cjo *  
                sqrt(phi * (phi * V(cap)))) ;  
    if (I(anode) > imax) // Checks current through port  
        $strobe( "Warning: diode is melting!" ) ;  
end  
endmodule
```

## Sources


A *potential source* is a branch in which the potential is assigned a value by a contribution statement somewhere in the module. A *flow source* is a branch in which the flow is assigned a value. A branch cannot simultaneously be both a potential and a flow source, although it

can switch between the two kinds. For additional information, see [“Switch Branches”](#) on page 277.

The circuit model for a potential source branch shows that you can obtain both the flow and the potential for a potential source branch.

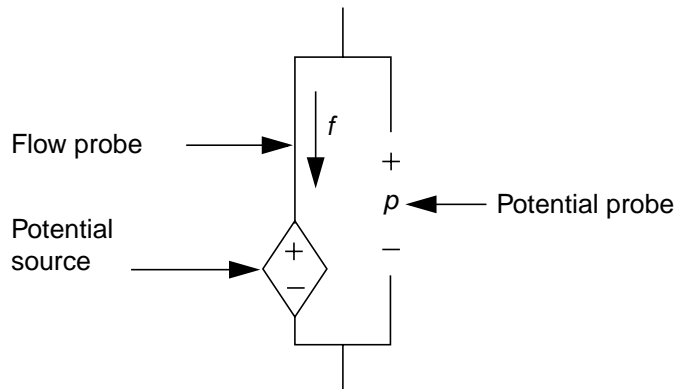

Similarly, the circuit model for a flow source branch shows that you can obtain the flow and potential for a flow source branch.

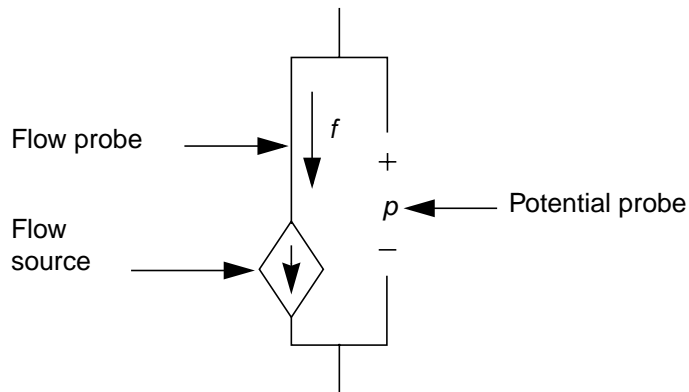

With the flow and potential sources, you can model the four basic controlled sources, using node or branch declarations and contribution statements like those in the following code fragments.

The model for a *voltage-controlled voltage source* is

```
branch (ps,ns) in, (p,n) out;  
V(out) <+ A * V(in);
```

The model for a *voltage-controlled current source* is

```
branch (ps,ns) in, (p,n) out;  
I(out) <+ A * V(in);
```

The model for a *current-controlled voltage source* is

```
branch (ps,ns) in, (p,n) out;  
V(out) <+ A * I(in);
```

The model for a *current-controlled current source* is

```
branch (ps,ns) in, (p,n) out;  
I(out) <+ A * I(in);
```

## Unassigned Sources

If you do not assign a value to a branch, the branch flow, by default, is set to zero. In the following fragment, for example, when `closed` is true,  $V(p,n)$  is set to zero. When `closed` is false, the current  $I(p,n)$  is set to zero.

```
if (closed)  
    V(p,n) <+ 0 ;  
else  
    I(p,n) <+ 0 ;
```

Alternatively, you could achieve the same result with

```
if (closed)  
    V(p,n) <+ 0 ;
```


This code fragment also sets  $V(p,n)$  to zero when `closed` is true. When `closed` is false, the current is set to zero by default.

## Switch Branches

*Switch branches* are branches that change from source potential branches into source flow branches, and vice versa. Switch branches are useful when you want to model ideal switches or mechanical stops.

To switch a branch to being a potential source, assign to its potential. To switch a branch to being a flow source, assign to its flow. The circuit model for a switch branch illustrates the

effect, with the position of the switch dependent upon whether you assign to the potential or to the flow of the branch.

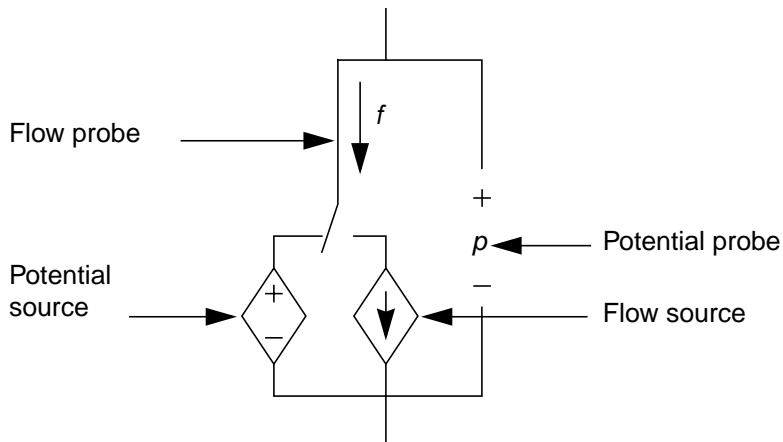

As an example of a switch branch, consider the module `idealRelay`.

```
module idealRelay (pout, nout, psense, nsense) ;
input psense, nsense ;
output pout, nout ;
electrical pout, nout, psense, nsense ;
parameter real thresh = 2.5 ;
analog begin
    if (V(psense, nsense) > thresh)
        V(pout, nout) <+ 0.0 ; // Becomes potential source
    else
        I(pout, nout) <+ 0.0 ; // Becomes flow source
    end
endmodule
```

The simulator assumes that a discontinuity of order zero occurs whenever the branch switches; so you do not have to use the discontinuity function with switch branches. For more information about the discontinuity function, see [“Announcing Discontinuity”](#) on page 119.

Contributing a flow to a branch that already has a value retained for the potential results in the potential being discarded and the branch being converted to a flow source. Conversely, contributing a potential to a branch that already has a value retained for the flow results in the flow being discarded and the branch being converted to a potential source. For example, in the following code, each of the contribution statements is discarded when the next is encountered.

```
analog begin
    V(out) <+ 1.0; // Discarded
    I(out) <+ 1.0; // Discarded
    V(out) <+ 1.0;
end
```

In the next example,

```
I(out) <+ 1.0;  
V(out) <+ I(out);
```

the result of `V(out)` is not 1.0. Instead, these two statements are equivalent to

```
// I(out) <+ 1.0;  
V(out) <+ I(out);
```

because the flow contribution is discarded. The simulator reminds you of this behavior by issuing a warning similar to the following,

The statement on line 12 contributes either a potential to a flow source or a flow to a potential source. To match the requirements of value retention, the statement is ignored.

## Troubleshooting Loops of Rigid Branches

The following message might not actually indicate an error in your code.

Fatal error found by spectre during topology check.  
The following branches form a loop of rigid branches (shorts)....:

Sometimes the simulator takes a too conservative approach to checking switch branches by assuming, when it is not actually the case, that all switch branches are in the voltage source mode at the same time. To disable this assumption, you can use the Cadence `no_rigid_switch_branch` attribute. To avoid convergence difficulties, however, do not use this attribute when you really do have multiple voltage sources in parallel or current sources in series.

To illustrate how the `no_rigid_switch_branch` can be used, assume that you have the following module.

```
// Verilog-A for sourceSwitch  
'include "constants.h"  
'include "discipline.h"  
  
module sourceSwitch(vip1, vin1, vip2, vin2, vop1, von1);  
    input vip1, vin1, vip2, vin2;  
    output vop1, von1;  
    electrical vip1, vin1, vip2, vin2, vop1, von1;  
    parameter integer swState = 0;  
  
    // (* no_rigid_switch_branch *) analog  
    analog //this block causes a topology check error  
    begin  
        if ( swState == 0 )  
        begin  
            V(vop1, vip1) <+ 1.0;  
            V(von1, vin1) <+ 1.0;  
        end  
        else if (swState == 1 )  
        begin  
            V(vop1, vip2) <+ 1.0;  
            V(von1, vin2) <+ 1.0;  
        end  
    end  
end
```

```
    end  
endmodule
```

Attempting to run this module produces the following error:

```
Fatal error found by spectre during topology check.  
The following branches form a loop of rigid branches (shorts) when  
added to the circuit:  
v1:p (from vipl to 0)  
myswitch:vonl_vin2_flow (from vonl to 0)
```

In this example, you can use the `no_rigid_switch_branch` attribute to turn off the checking because the check indicates a problem when there actually is no problem. To use the attribute, you insert it before the analog block. (In the illustrated module, you can just uncomment the row containing the `no_rigid_switch_branch` attribute and comment out the following row.)


## Examples of Sources and Probes

The following examples illustrate how to construct models using sources and probes.

### Linear Conductor

The model for a linear conductor is

```
Module myconductor(p,n) ;  
parameter real G=1 ;  
electrical p,n ;  
branch (p,n) cond ;  
analog begin  
    I(cond) <+ G * V(cond);  
end  
endmodule
```

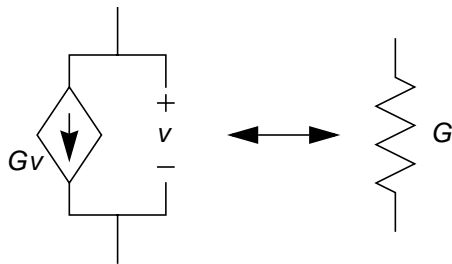


The contribution to `I (cond)` makes `cond` a current (flow) source branch, and `V (cond)` accesses the potential probe built into the current source branch.



## Linear Resistor

The model for a linear resistor is

```
module myresistor(p,n) ;
parameter real R=1 ;
electrical p,n;
branch (p,n) res ;
analog begin
    V(res) <+ R * I(res);
end
endmodule
```

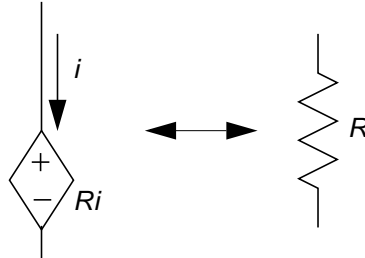

The contribution to  $V(res)$  makes  $res$  a potential source branch.  $I(res)$  accesses the flow probe built into the potential source branch.

## RLC Circuit

A series RLC circuit is formulated by summing the voltage across the three components.

$$v(t) = Ri(t) + L \frac{d}{dt}i(t) + \frac{1}{C} \int_{-\infty}^t i(\tau) d\tau$$

To describe the series RLC circuit with probes and sources, you might write

```
V(p,n) <+ R*I(p,n) + L*ddt(I(p,n)) + idt(I(p,n))/C ;
```

A parallel RLC circuit is formulated by summing the currents through the three components.

$$i(t) = \frac{v(t)}{R} + C \frac{d}{dt}v(t) + \frac{1}{L} \int_{-\infty}^t v(\tau) d\tau$$

To describe the parallel RLC circuit, you might code

```
I(p,n) <+ V(p,n)/R + C*ddt(V(p,n)) + idt(V(p,n))/L ;
```

## Simple Implicit Diode

This example illustrates a case where the model equation is implicit. The model equation is implicit because the current  $I(a,c)$  appears on both sides of the contribution operator. The equation specifies the current of the branch, making it a flow source branch. In addition, both the voltage and the current of the branch are used in the behavioral description.

```
I(a,c) <+ is * (limexp((V(a,c) - rs * I(a,c)) / Vt) - 1) ;
```

## **Cadence Verilog-A Language Reference**

### Analog Probes and Sources

---

---

## Standard Definitions

---

The following definitions are included in the `disciplines.vams` and `constants.vams` files, which are supplied with the Cadence® Verilog®-A language. To see the contents of these files, go to

- [disciplines.vams File](#) on page 284
- [constants.vams File](#) on page 288

You can use these definitions as they are, change them, or override them. For example, to override the default value of the `abstol` attribute of the nature `current`, define `CURRENT_ABSTOL` before including the `disciplines.vams` file.

For information on how to include these definitions in your files, see “[Including Files at Compilation Time](#)” on page 196.

## disciplines.vams File

```
`ifdef DISCIPLINES_VAMS
`else
`define DISCIPLINES_VAMS 1
// Release/Version related macros
`ifdef CDS_MMSIM6_0_KERNEL_OR_LATER
`else
`define CDS_MMSIM6_0_KERNEL_OR_LATER 1
`endif

/*
 * Verilog-AMS HDL version 2.2 introduced a number of extensions
 * to support compact modeling.
 * Predefined macros here.
 */
`ifdef __VAMS_COMPACT_MODELING__
`else
`define __VAMS_COMPACT_MODELING__ 1
`endif

//
// Natures and Disciplines
//

`ifdef VAMS_ELEC_DIS_ONLY
`else

discipline \logic
    domain discrete;
enddiscipline

`endif

/*
 * Default absolute tolerances may be overridden by setting the
 * appropriate _ABSTOL prior to including this file
 */

// Electrical
// Current in amperes
nature Current
    units      = "A";
    access     = I;
`ifdef VAMS_ELEC_DIS_ONLY
`else
    idt_nature = Charge;
`endif
`ifdef CURRENT_ABSTOL
    abstol     = `CURRENT_ABSTOL;
`else
    abstol     = 1e-12;
`endif
endnature

`ifdef VAMS_ELEC_DIS_ONLY
`else

// Charge in coulombs
nature Charge
    units      = "coul";
    access     = Q;
    ddt_nature = Current;
`ifdef CHARGE_ABSTOL
```

## Cadence Verilog-A Language Reference

### Standard Definitions

---

```
        abstol      = `CHARGE_ABSTOL;
`else
        abstol      = 1e-14;
`endif
endnature
`endif

// Potential in volts
nature Voltage
    units          = "V";
    access         = V;
`ifdef VAMS_ELEC_DIS_ONLY
`else
    idt_nature     = Flux;
`endif
`ifdef VOLTAGE_ABSTOL
    abstol         = `VOLTAGE_ABSTOL;
`else
    abstol         = 1e-6;
`endif
endnature
`ifdef VAMS_ELEC_DIS_ONLY
`else
// Flux in Webers
nature Flux
    units          = "Wb";
    access         = Phi;
    ddt_nature     = Voltage;
`ifdef FLUX_ABSTOL
    abstol         = `FLUX_ABSTOL;
`else
    abstol         = 1e-9;
`endif
endnature
`endif

// Conservative discipline
discipline electrical
    potential      Voltage;
    flow           Current;
enddiscipline

// Signal flow disciplines
discipline voltage
    potential      Voltage;
enddiscipline

discipline current
    potential      Current;
enddiscipline

`ifdef VAMS_ELEC_DIS_ONLY
`else
// Magnetic
// Magnetomotive force in Ampere-Turns.
nature Magneto_Motive_Force
    units          = "A*turn";
    access         = MMF;
`ifdef MAGNETO_MOTIVE_FORCE_ABSTOL
    abstol         = `MAGNETO_MOTIVE_FORCE_ABSTOL;
```

## Cadence Verilog-A Language Reference

### Standard Definitions

---

```
`else
    abstol      = 1e-12;
`endif
endnature

// Conservative discipline
discipline magnetic
    potential    Magneto_Motive_Force;
    flow        Flux;
enddiscipline

// Thermal
// Temperature in Celsius
nature Temperature
    units        = "C";
    access       = Temp;
`ifdef TEMPERATURE_ABSTOL
    abstol       = `TEMPERATURE_ABSTOL;
`else
    abstol       = 1e-4;
`endif
endnature

// Power in Watts
nature Power
    units        = "W";
    access       = Pwr;
`ifdef POWER_ABSTOL
    abstol       = `POWER_ABSTOL;
`else
    abstol       = 1e-9;
`endif
endnature

// Conservative discipline
discipline thermal
    potential    Temperature;
    flow        Power;
enddiscipline

// Kinematic
// Position in meters
nature Position
    units        = "m";
    access       = Pos;
    ddt_nature   = Velocity;
`ifdef POSITION_ABSTOL
    abstol       = `POSITION_ABSTOL;
`else
    abstol       = 1e-6;
`endif
endnature

// Velocity in meters per second
nature Velocity
    units        = "m/s";
    access       = Vel;
    ddt_nature   = Acceleration;
    idt_nature   = Position;
`ifdef VELOCITY_ABSTOL
    abstol       = `VELOCITY_ABSTOL;
`else
```

## Cadence Verilog-A Language Reference

### Standard Definitions

---

```
        abstol      = 1e-6;
`endif
endnature

// Acceleration in meters per second squared
nature Acceleration
    units      = "m/s^2";
    access     = Acc;
    ddt_nature = Impulse;
    idt_nature = Velocity;
`ifdef ACCELERATION_ABSTOL
    abstol     = `ACCELERATION_ABSTOL;
`else
    abstol     = 1e-6;
`endif
endnature

// Impulse in meters per second cubed
nature Impulse
    units      = "m/s^3";
    access     = Imp;
    idt_nature = Acceleration;
`ifdef IMPULSE_ABSTOL
    abstol     = `IMPULSE_ABSTOL;
`else
    abstol     = 1e-6;
`endif
endnature

// Force in newtons
nature Force
    units      = "N";
    access     = F;
`ifdef FORCE_ABSTOL
    abstol     = `FORCE_ABSTOL;
`else
    abstol     = 1e-6;
`endif
endnature

// Conservative disciplines
discipline kinematic
    potential   Position;
    flow        Force;
enddiscipline

discipline kinematic_v
    potential   Velocity;
    flow        Force;
enddiscipline

// Rotational
// Angle in radians
nature Angle
    units      = "rads";
    access     = Theta;
    ddt_nature = Angular_Velocity;
`ifdef ANGLE_ABSTOL
    abstol     = `ANGLE_ABSTOL;
`else
    abstol     = 1e-6;
`endif
endnature
```

## Cadence Verilog-A Language Reference

### Standard Definitions

---

```
// Angular Velocity in radians per second
nature Angular_Velocity
  units      = "rads/s";
  access     = Omega;
  ddt_nature = Angular_Acceleration;
  idt_nature = Angle;
`ifdef ANGULAR_VELOCITY_ABSTOL
  abstol     = `ANGULAR_VELOCITY_ABSTOL;
`else
  abstol     = 1e-6;
`endif
endnature

// Angular acceleration in radians per second squared
nature Angular_Acceleration
  units      = "rads/s^2";
  access     = Alpha;
  idt_nature = Angular_Velocity;
`ifdef ANGULAR_ACCELERATION_ABSTOL
  abstol     = `ANGULAR_ACCELERATION_ABSTOL;
`else
  abstol     = 1e-6;
`endif
endnature

// Force in newtons
nature Angular_Force
  units      = "N*m";
  access     = Tau;
`ifdef ANGULAR_FORCE_ABSTOL
  abstol     = `ANGULAR_FORCE_ABSTOL;
`else
  abstol     = 1e-6;
`endif
endnature

// Conservative disciplines
discipline rotational
  potential   Angle;
  flow       Angular_Force;
enddiscipline

discipline rotational_omega
  potential   Angular_Velocity;
  flow       Angular_Force;
enddiscipline
`endif // VAMS_ELEC_DIS_ONLY
`endif // DISCIPLINES_VAMS
`ifdef VAMS_ELEC_DIS_ONLY
`undef VAMS_ELEC_DIS_ONLY
`undef DISCIPLINES_VAMS
`endif
```

## constants.vams File

```
// Mathematical and physical constants
`ifdef CONSTANTS_VAMS
`else
`define CONSTANTS_VAMS 1
```



## Cadence Verilog-A Language Reference

### Standard Definitions

---

```
// M_ is a mathematical constant
`define      M_E          2.7182818284590452354
`define      M_LOG2E      1.4426950408889634074
`define      M_LOG10E     0.43429448190325182765
`define      M_LN2        0.69314718055994530942
`define      M_LN10       2.30258509299404568402
`define      M_PI         3.14159265358979323846
`define      M_TWO_PI     6.28318530717958647652
`define      M_PI_2       1.57079632679489661923
`define      M_PI_4       0.78539816339744830962
`define      M_1_PI       0.31830988618379067154
`define      M_2_PI       0.63661977236758134308
`define      M_2_SQRTPI   1.12837916709551257390
`define      M_SQRT2      1.41421356237309504880
`define      M_SQRT1_2    0.70710678118654752440

// P_ is a physical constant
// charge of electron in coulombs
`define      P_Q          1.6021918e-19
// speed of light in vacuum in meters/sec
`define      P_C          2.997924562e8
// Boltzmann's constant in joules/kelvin
`define      P_K          1.3806226e-23
// Planck's constant in joules*sec
`define      P_H          6.6260755e-34
// permittivity of vacuum in farads/meter
`define      P_EPS0       8.85418792394420013968e-12
// permeability of vacuum in henrys/meter
`define      P_U0         (4.0e-7 * `M_PI)
// zero celsius in kelvin
`define      P_CELSIUS0   273.15
`endif
```

## **Cadence Verilog-A Language Reference**

### **Standard Definitions**

---

---

## Sample Model Library

---

This appendix discusses the Sample Model Library, which is included with this product. The library contains the following types of components:

- [Analog Components](#) on page 293
- [Basic Components](#) on page 310
- [Control Components](#) on page 318
- [Logic Components](#) on page 326
- [Electromagnetic Components](#) on page 346
- [Functional Blocks](#) on page 349
- [Magnetic Components](#) on page 372
- [Mathematical Components](#) on page 376
- [Measure Components](#) on page 393
- [Mechanical Systems](#) on page 413
- [Mixed-Signal Components](#) on page 420
- [Power Electronics Components](#) on page 429
- [Semiconductor Components](#) on page 432
- [Telecommunications Components](#) on page 440

You can use these models as they are, you can copy them and modify them to create new parts, or you can use them as examples. The models are in the following directory in the software hierarchy:

`your_install_dir/tools/dfII/samples/artist/spectreHDL/Verilog-A`

Refer to the README file in this directory for a list of the files containing the models. The filenames have the suffix `.va`. For example, the model for the switch is located in `sw.va`. Each model has an associated test circuit that can be used to simulate the model.

## Cadence Verilog-A Language Reference

### Sample Model Library

---

These models are also integrated into a Cadence® design framework II library, complete with symbols and Component Description Formats (CDFs). If you are using the Cadence analog design environment, you can access these models by adding the following library to your library path:

```
your_install_dir/tools/dfII/samples/artist/ahdlLib
```

This appendix provides a list of the parts and functions in the sample library. They are grouped according to application.

In the terminal description and parameter descriptions, the letters between the square brackets, such as [V,A] and [V], refer to the units associated with the terminal or parameter. V means volts, A means amps. (val, flow) means that any units can be used.

## Analog Components

### Analog Multiplexer

#### Terminals

`vin1, vin2:`      [V,A]  
`vsel:`            selection voltage [V,A]  
`vout:`            [V,A]

#### Description

When `vsel > vth`, the output voltage follows `vin1`.

When `vsel < vth`, the output voltage follows `vin2`.

#### Instance Parameters

`vth = 1->0` threshold voltage for the selection line [V]

## Current Deadband Amplifier

### Terminals

`iin_p, iin_n`: differential input current terminals [V,A]  
`iout`: output current terminal [V,A]

### Description

Outputs `ileak` when differential input current (`iin_p - iin_n`) is between `idead_low` and `idead_high`. When outside the deadband, the output current is an amplified version of the differential input current plus `ileak`.

### Instance Parameters

`idead_low` = lower range of dead band [A]  
`idead_high` = upper range of dead band [A]  
`ileak` = offset current; only output in deadband [A]  
`gain_low` = differential current gain in lower region []  
`gain_high` = differential current gain in lower region []

## **Hard Current Clamp**

### **Terminals**

`vin:`        input terminal [V,A]  
`vout:`       output terminal [V,A]  
`vgnd:`       gnd terminal [V,A]

### **Description**

Hard limits output current to between `iclamp_upper` and `iclamp_lower` of the input current.

### **Instance Parameters**

`iclamp_upper` = upper clamping current [A]  
`iclamp_lower` = lower clamping current [A]

## **Hard Voltage Clamp**

### **Terminals**

`vin:`        input terminal [V,A]  
`vout:`       output terminal [V,A]  
`vgnd:`      gnd terminal [V,A]

### **Description**

`vout`- `vgnd` hard clamped/limited to between `vclamp_upper` and `vclamp_lower` of `vin` - `vgnd`.

### **Instance Parameters**

`vclamp_upper` = upper clamping voltage [A]  
`vclamp_lower` = lower clamping voltage [A]



## Open Circuit Fault

### Terminals

`vp`, `vn`:          output terminals [V,A]

### Description

At time=`twait`, the connection between the two terminals is opened. Before this, the connection between the terminals is closed.

### Instance Parameters

`twait` = time to wait before open fault happens [s]

## Operational Amplifier

### Terminals

<code>vin_p, vin_n:</code>	differential input voltage [V,A]
<code>vout:</code>	output voltage [V,A]
<code>vref:</code>	reference voltage [V,A]
<code>vsupply_p:</code>	positive supply voltage [V,A]
<code>vsupply_n:</code>	negative supply voltage [V,A]

### Instance Parameters

<code>gain = gain []</code>
<code>freq_unitygain = unity gain frequency [Hz]</code>
<code>rin = input resistance [Ohms]</code>
<code>vin_offset = input offset voltage referred to negative [V]</code>
<code>ibias = input current [A]</code>
<code>iin_max = maximum current [A]</code>
<code>rsrc = source resistance [Ohms]</code>
<code>rout = output resistance [Ohms]</code>
<code>vsoft = soft output limiting value [V]</code>

## Constant Power Sink

### Terminals

`vp`, `vn`: terminals [V,A]

### Description

Normally `power` watts of power is sunk. If the absolute value of `vp - vn` is above `vabsmin`, a fraction of the `power` is sunk. The fraction is the ratio of `vp - vn` to `vabsmin`.

### Instance Parameters

`power` = power sunk [Watts]

`vabsmin` = absolute value of minimum input voltage [V]

## **Short Circuit Fault**

### **Terminals**

`vp`, `vn`:          output terminals [V,A]

### **Description**

At time=`twait`, the two terminals short. Before this, the connection between the terminals is open.

### **Instance Parameters**

`twait` = time to wait before short circuit occurs [s]

## Soft Current Clamp

### Terminals

`vin:`        input terminal [V,A]  
`vout:`       output terminal [V,A]  
`vgnd:`      gnd terminal [V,A]

### Description

Limits output current to between `iclamp_upper` and `iclamp_lower` of the input current.

The limiting starts working once the input current gets near `iclamp_lower` or `iclamp_upper`. The clamping acts exponentially to ensure smoothness.

The fraction of the range (`iclamp_lower`, `iclamp_upper`) over which the exponential clamping action occurs is `exp_frac`.

Excess current coming from `vin` is routed to `vgnd`.

### Instance Parameters

`iclamp_upper` = upper clamping current [A]

`iclamp_lower` = lower clamping current [A]

`exp_frac` = fraction of `iclamp` range from `iclamp_upper` and `iclamp_lower` at which exponential clamping starts to have an effect []

## Soft Voltage Clamp

### Terminals

`vin:`        input terminal [V,A]  
`vout:`       output terminal [V,A]  
`vgnd:`      gnd terminal [V,A]

### Description

`vout`- `vgnd` clamped/limited to between `vclamp_upper` and `vclamp_lower` of `vin` - `vgnd`.

The limiting starts working once the input voltage gets near `vclamp_lower` or `vclamp_upper`. The clamping acts exponentially to ensure smoothness.

The fraction of the range (`vclamp_lower`, `vclamp_upper`) over which the exponential clamping action occurs is `exp_frac`.

### Instance Parameters

`vclamp_upper` = upper clamping voltage [A]

`vclamp_lower` = lower clamping voltage [A]

`exp_frac` = fraction of `vclamp` range from `vclamp_upper` and `vclamp_lower` at which exponential clamping starts to have an effect []

## Self-Tuning Resistor

### Terminals

`vp`, `vn`: terminals [V,A]  
`vtune`: the voltage that is being tuned [V,A]  
`verr`: the error in `vtune` [V,A]

### Description

This element operates in four distinct phases:

1. It waits for `tsettle` seconds with the resistance between `vp` and `vn` set to `rinit`.
2. For `tdir_check` seconds, it attempts to tune the error away by increasing the resistance in proportion to the size of the error.
3. It waits for `tsettle` seconds with the resistance between `vp` and `vn` set to `rinit`.
4. For `tdir_check` seconds, it attempts to tune the error away by decreasing the resistance in proportion to the error.
5. Based on the results of (2) and (4), it selects which direction is better to tune in and tunes as best it can using integral action. For certain systems, this might lead to unstable behavior.

**Note:** Select `tsettle` to be greater than the largest system time constant. Select `rgain` so that the positive feedback is not excessive during the direction sensing phases. Select `tdir_check` so that the system has enough time to react but not so big that the resistance drifts too far from `rinit`. It is better if it can be arranged that `verr` does not change sign during tuning.

### Instance Parameters

`rmax` = maximum resistance that tuning res can have [Ohms]  
`rmin` = minimum resistance that tuning res can have [Ohms]  
`rinit` = initial resistance [Ohms]  
`rgain` = gain of integral tuning action [Ohms/(Vs)]

## Cadence Verilog-A Language Reference

### Sample Model Library

---

`vtune_set` = value that `vtune` must be tuned to [V]

`tsettle` = amount of time to wait before tuning begins [s]

`tdir_check` = amount of time to spend checking each tuning direction [s]



## Untrimmed Capacitor

### Terminals

`vp, vn:` terminals [V,A]

### Description

Each instance has a randomly generated value of capacitance, which is calculated at initialization. The distribution of these random values is gaussian (that is, normal) with a `c_mean` and a standard deviation of `c_std`.

Two seeds are needed to generate the gaussian distribution.

### Instance Parameters

`c_mean` = mean capacitance [Ohms]

`c_dev` = standard deviation of capacitance [Ohms]

`seed1` = first seed value for randomly generating capacitance values []

`seed2` = second seed value for randomly generating capacitance values []

`show_val` = option to print the value of capacitance to stdout

## Untrimmed Inductor

### Terminals

`vp, vn:` terminals [V,A]

### Description

Each instance has a randomly generated value of inductance, which is calculated at initialization. The distribution of these random values is gaussian (that is, normal) with an `l_mean` and a standard deviation of `l_std`.

Two seeds are needed to generate the gaussian distribution.

### Instance Parameters

`l_mean` = mean inductance [Ohms]

`l_dev` = standard deviation of inductance [Ohms]

`seed1` = first seed value for randomly generating inductance values []

`seed2` = second seed value for randomly generating inductance values []

`show_val` = option to print the value of inductance to stdout

## Untrimmed Resistor

### Terminals

`vp, vn:` terminals [V,A]

### Description

Each instance has a randomly generated value of resistance, which is calculated at initialization. The distribution of these random values is gaussian (that is, normal) with an `r_mean` and a standard deviation of `r_std`.

Two seeds are needed to generate the gaussian distribution.

### Instance Parameters

`r_mean` = mean resistance [Ohms]

`r_dev` = standard deviation of resistance [Ohms]

`seed1` = first seed value for randomly generating resistance values []

`seed2` = second seed value for randomly generating resistance values []

`show_val` = option to print the value of resistance to stdout

## Voltage Deadband Amplifier

### Terminals

`vin_p, vin_n`: differential input voltage terminals [V,A]

`vout`: output voltage terminal [V,A]

### Description

Outputs `vleak` when differential input voltage (`vin_p-vin_n`) is between `vdead_low` and `vdead_high`. When outside the deadband, the output voltage is an amplified version of the differential input voltage plus `vleak`.

### Instance Parameters

`vdead_low` = lower range of dead band [V]

`vdead_high` = upper range of dead band [V]

`vleak` = offset voltage; only output in deadband [V]

`gain_low` = differential voltage gain in lower region []

`gain_high` = differential voltage gain in upper region []

## Voltage-Controlled Variable-Gain Amplifier

### Terminals

`vin_p, vin_n:` differential input terminals [V,A]  
`vctrl_p, vctrl_n:` differential-controlling voltage terminals [V,A]  
`vout:` [V,A]

### Description

When there is no input offset voltage, the output is  $vout = gain\_const * (vctrl\_p - vctrl\_n) * (vin\_p - vin\_n) + (vout\_high + vout\_low)/2$ .

When there is an input offset voltage, `vin_offset` is subtracted from  $(vin\_p - vin\_n)$ .

### Instance Parameters

`gain_const` = amplifier gain when  $(vctrl\_p - vctrl\_n) = 1$  volt []  
`vout_high` = upper output limit [V]  
`vout_low` = lower output limit [V]  
`vin_offset` = input offset [V]

## Basic Components

### Resistor

#### Terminals

$v_p$ ,  $v_n$ : terminals (V,A)

#### Instance Parameters

$r$  = resistance (Ohms)

## **Capacitor**

### **Terminals**

`vp`, `vn`: terminals (V,A)

### **Instance Parameters**

`c` = capacitance (F)

## **Inductor**

### **Terminals**

`vp`, `vn`: terminals (V,A)

### **Instance Parameters**

`l` = inductance (H)



## **Voltage-Controlled Voltage Source**

### **Terminals**

vout\_p, vout\_n:      controlled voltage terminals [V,A]

vin\_p, vin\_n:        controlling voltage terminals [V,A]

### **Instance Parameters**

gain = voltage gain []

## **Current-Controlled Voltage Source**

### **Terminals**

`vout_p, vout_n:`      controlled voltage terminals [V,A]

`iin_p, iin_n:`      controlling current terminals [V,A]

### **Instance Parameters**

`rm` = resistance multiplier (V to I gain) [Ohms]

## **Voltage-Controlled Current Source**

### **Terminals**

iout\_p, iout\_n:      controlled current source terminals [V,A]

vin\_p, vin\_n:      controlling voltage terminals [V,A]

### **Instance Parameters**

gm = conductance multiplier (V to I gain) [Mhos]

## **Current-Controlled Current Source**

### **Terminals**

`iout_p, iout_n:`      controlled current terminals [V,A]

`iin_p, iin_n:`      controlling current terminals [V,A]

### **Instance Parameters**

`gain` = current gain []

## Switch

### Terminals

`vp`, `vn`: output terminals [V,A]

`vctrlp`, `vctrln`: control terminals [V,A]

### Description

If  $(vctrlp - vctrln > vth)$ , the branch between `vp` and `vn` is shorted. Otherwise, the branch between `vp` and `vn` is opened.

### Instance Parameters

`vth` = threshold voltage [V]

## Control Components

### Error Calculation Block

#### Terminals

`sigset:` setpoint signal (val, flow)

`sigact:` actual value signal (val, flow)

`sigerr:` error: difference between signals (val, flow)

#### Description

`sigerr = sigset - sigact`

**Note:** Defining larger values of `abstol` and `huge` for the quantities associated with `signin` and `sigout` can help overcome convergence and clipping problems.

#### Instance Parameters

`tdel, trise, tfall = {usual}`

## Lag Compensator

### Terminals

signin: (val, flow)

sigout: (val, flow)

### Description

$$TF = gain \times alpha \times \frac{1 + tau \times S}{1 + alpha \times tau \times S}$$

**Note:** Defining larger values of `abstol` and `huge` for the quantities associated with `signin` and `sigout` can help overcome convergence and clipping problems.

### Instance Parameters

`gain` = compensator gain []

`tau` = compensator zero at  $-(1/tau)$  [s]

`alpha` = compensator pole at  $-(1/(alpha \times tau))$ ;  $alpha > 1$  []

## Lead Compensator

### Terminals

signin: (val, flow)

sigout: (val, flow)

### Description

$$TF = gain \times alpha \times \frac{1 + tau \times S}{1 + alpha \times tau \times S}$$

**Note:** Defining larger values of `abstol` and `huge` for the quantities associated with `signin` and `sigout` can help overcome convergence and clipping problems.

### Instance Parameters

`gain` = compensator gain []

`tau` = compensator zero at  $-(1/tau)$  [s]

`alpha` = compensator pole at  $-(1/(alpha \times tau))$ ;  $alpha < 1$  []



## Lead-Lag Compensator

### Terminals

signin: (val, flow)

sigout: (val, flow)

### Description

$TF =$

$$gain \times \alpha_1 \times \frac{1 + \tau_1 \times S}{1 + \alpha_1 \times \tau_1 \times S} \times \alpha_2 \times \frac{1 + \tau_2 \times S}{1 + \alpha_2 \times \tau_2 \times S}$$

Defining larger values of `abstol` and `huge` for the quantities associated with `signin` and `sigout` can help overcome convergence and clipping problems.

### Instance Parameters

`gain` = compensator gain []

`tau1` = compensator zero at  $-(1/\tau_1)$  [s]

`alpha1` = compensator pole at  $-(1/(\alpha_1 \times \tau_1))$ ;  $\alpha_1 > 1$  []

`tau2` = compensator zero at  $-(1/\tau_2)$  [s]

`alpha2` = compensator pole at  $-(1/(\alpha_2 \times \tau_2))$ ;  $\alpha_2 < 1$  []

## Proportional Controller

### Terminals

`signin:`      (val, flow)

`sigout:`      (val, flow)

### Description

`sigout = kp*signin`

**Note:** Defining larger values of `abstol` and `huge` for the quantities associated with `signin` and `sigout` can help overcome convergence and clipping problems.

### Instance Parameters

`kp` = proportional gain []

## Proportional Derivative Controller

### Terminals

`signin:` (val, flow)

`sigout:` (val, flow)

### Description

$\text{sigout} = k_p \cdot \text{signin} + k_d \cdot \text{dot}(\text{signin})$

**Note:** Defining larger values of `abstol` and `huge` for the quantities associated with `signin` and `sigout` can help overcome convergence and clipping problems.

### Instance Parameters

`kp` = proportional gain []

`kd` = differential gain []

## Proportional Integral Controller

### Terminals

`signin:`      (val, flow)

`sigout:`      (val, flow)

### Description

This model is a proportional, integral, and derivative controller.

```
sigout = kp * signin + ki * integ (signin) + kd* dot (signin)
```

**Note:** Defining larger values of `abstol` and `huge` for the quantities associated with `signin` and `sigout` can help overcome convergence and clipping problems.

### Instance Parameters

`kp` = proportional gain []

`ki` = integral gain []

## Proportional Integral Derivative Controller

### Terminals

signin: (val, flow)

sigout: (val, flow)

### Description

$\text{sigout} = k_p * \text{signin} + k_i * \text{integ}(\text{signin}) + k_d * \text{dot}(\text{signin})$

**Note:** Defining larger values of `abstol` and `huge` for the quantities associated with `signin` and `sigout` can help overcome convergence and clipping problems.

### Instance Parameters

`kp` = proportional gain []

`ki` = integral gain []

`kd` = differential gain []

## Logic Components

### AND Gate

#### Terminals

vin1, vin2:      [V,A]

vout:            [V,A]

#### Instance Parameters

vlogic\_high = output voltage for high [V]

vlogic\_low = output voltage for low [V]

vtrans = voltages above this at input are considered high [V]

tdel, trise, tfall = {usual} [s]

## **NAND Gate**

### **Terminals**

vin1, vin2:           [V,A]

vout:                 [V,A]

### **Instance Parameters**

vlogic\_high = output voltage for high [V]

vlogic\_low = output voltage for high [V]

vtrans = voltages above this at input are considered high [V]

tdel, trise, tfall = {usual} [s]

## **OR Gate**

### **Terminals**

vin1, vin2:           [V,A]

vout:                 [V,A]

### **Instance Parameters**

vlogic\_high = output voltage for high [V]

vlogic\_low = output voltage for high [V]

vtrans = voltages above this at input are considered high [V]

tdel, trise, tfall = {usual} [s]



## **NOT Gate**

### **Terminals**

vin:           [V,A]

vout:           [V,A]

### **Instance Parameters**

vlogic\_high = output voltage for high [V]

vlogic\_low = output voltage for high [V]

vtrans = voltages above this at input are considered high [V]

tdel, trise, tfall = {usual} [s]

## **NOR Gate**

### **Terminals**

vin1, vin2:           [V,A]

vout:                 [V,A]

### **Instance Parameters**

vlogic\_high = output voltage for high [V]

vlogic\_low = output voltage for high [V]

vtrans = voltages above this at input are considered high [V]

tdel, trise, tfall = {usual} [s]

## **XOR Gate**

### **Terminals**

vin1, vin2:      [V,A]

vout:            [V,A]

### **Instance Parameters**

vlogic\_high = output voltage for high [V]

vlogic\_low = output voltage for high [V]

vtrans = voltages above this at input are considered high [V]

tdel, trise, tfall = {usual} [s]

## **XNOR Gate**

### **Terminals**

vin1, vin2:      [V,A]

vout:            [V,A]

### **Instance Parameters**

vlogic\_high = output voltage for high [V]

vlogic\_low = output voltage for high [V]

vtrans = voltages above this at input are considered high [V]

tdel, trise, tfall = {usual} [s]

## **D-Type Flip-Flop**

### **Terminals**

vin\_d:           [V,A]  
vclk:            [V,A]  
out\_q, vout\_qbar: [V,A]

### **Description**

Triggered on the rising edge.

### **Instance Parameters**

vlogic\_high = output voltage for high [V]  
vlogic\_low = output voltage for low [V]  
vtrans = voltages above this at input are considered high [V]  
vtrans\_clk = transition voltage of clock [V]  
tdel, trise, tfall = {usual} [s]

## Clocked JK Flip-Flop

### Terminals

vin\_j: [V,A]

vin\_k: [V,A]

vclk: [V,A]

vout\_q: [V,A]

vout\_qbar: [V,A]

### Description

Triggered on the rising edge.

### Logic Table

J	K	Q	Q'
0	0	0	0
0	0	1	1
0	1	0	0
0	1	1	0
1	0	0	1
1	0	1	1
1	1	0	1
1	1	1	0

### Instance Parameters

vlogic\_high = output voltage for high [V]

vlogic\_low = output voltage for low [V]

vtrans = voltages above this at input are considered high [V]

```
tdel, trise, tfall = {usual} [s]
```

## JK-Type Flip-Flop

### Terminals

vin\_j, vin\_k:            inputs

vout\_q, vout\_qbar:    outputs

### Description

Triggered on the rising edge.

### Logic Table

J	K	Q	Q(t+e)
0	0	0	0
0	0	1	1
0	1	0	0
0	1	1	0
1	0	0	1
1	0	1	1
1	1	0	1
1	1	1	0

### Instance Parameters

vlogic\_high = output voltage for high [V]

vlogic\_low = output voltage for low [V]

vtrans = voltages above this at input are considered high [V]

tdel, trise, tfall = {usual} [s]



## **Level Shifter**

### **Terminals**

`sigin:`        (val, flow)

`sigout:`      (val, flow)

### **Description**

`sigout` = `sigin` added to `sigshift`.

### **Instance Parameters**

`sigshift` = level shift (val)

## RS-Type Flip-Flop

### Terminals

vin\_s: [V,A]

vin\_r: [V,A]

vout\_q, vout\_qbar: [V,A]

### Logic Table

S(t)	R(t)	Q(t)	Q(t+e)
0	0	0	0
0	0	1	1
0	1	0	0
0	1	1	0
1	0	0	1
1	0	1	1
1	1	0	X
1	1	1	X

### Instance Parameters

vlogic\_high = output voltage for high [V]

vlogic\_low = output voltage for low [V]

vtrans = voltages above this at input are considered high [V]

tdel, trise, tfall = {usual} [s]

## Trigger-Type (Toggle-Type) Flip-Flop

### Terminals

vtrig:      trigger [V,A]

vout\_q, vout\_qbar:      outputs [V,A]

### Description

Triggered on the rising edge.

### Logic Table

T	Q	Q(t+e)
0	0	0
0	1	1
1	0	1
1	1	0

### Instance Parameters

initial\_state = the initial state/output of the flip-flop []

vlogic\_high = output voltage for high [V]

vlogic\_low = output voltage for low [V]

vtrans = voltages above this at input are considered high [V]

tdel, trise, tfall = {usual} [s]

## **Half Adder**

### **Terminals**

vin1, vin2:        bits to be added [V,A]

vout\_sum:         vout\_sum out [V,A]

vout\_carry:        carry out [V,A]

### **Instance Parameters**

vlogic\_high = logic high value [V]

vlogic\_low = logic low value [V]

vtrans = threshold for inputs to be high [V]

tdel, trise, tfall = {usual} [s]

## **Full Adder**

### **Terminals**

vin1, vin2:        bits to be added [V,A]  
vin\_carry:        carry in [V,A]  
vout\_sum:        sum out    [V,A]  
vout\_carry:       carry out [V,A]

### **Instance Parameters**

vlogic\_high = logic high value [V]  
vlogic\_low = logic low value [V]  
vtrans = threshold for inputs to be high [V]  
tdel, trise, tfall = {usual} [s]

## Half Subtractor

### Terminals

vin1, vin2:      inputs [V,A]  
vout\_diff:      difference out [V,A]  
vout\_borrow:    borrow out [V,A]

### Formula

$\text{vin1} - \text{vin2} = \text{vout\_diff} \text{ and borrow}$

### Truth Table

in1	in2	diff	borrow
0	0	0	0
0	1	1	1
1	0	1	0
1	1	0	0

### Instance Parameters

vlogic\_high = logic high value [V]  
vlogic\_low = logic low value [V]  
vtrans = threshold for inputs to be high [V]  
tdel, trise, tfall = {usual} [s]

## Full Subtractor

### Terminals

vin1, vin2:        inputs [V,A]  
vin\_borrow:       borrow in [V,A]  
vout\_diff:        difference out [V,A]  
vout\_borrow:      borrow out [V,A]

### Truth Table

in1	in2	bin	bout	doff
0	0	0	0	0
0	0	1	1	1
0	1	0	1	1
0	1	1	1	0
1	0	0	0	1
1	0	1	0	0
1	1	0	0	0
1	1	1	1	1

### Instance Parameters

vlogic\_high = logic high value [V]  
vlogic\_low = logic low value [V]  
vtrans = threshold for inputs to be high [V]  
tdel, trise, tfall = {usual} [s]

## **Parallel Register, 8-Bit**

### **Terminals**

`vin_d0..vin_d7:`      input data lines [V,A]  
`vout_d0..vout_d7:`   output data lines [V,A]  
`venable:`            enable line [V,A]

### **Description**

Input occurs on the rising edge of `venable`.

### **Instance Parameters**

`vlogic_high` = output voltage for high [V]  
`vlogic_low` = output voltage for low [V]  
`vtrans` = voltages above this at input are considered high [V]  
`tdel, trise, tfall` = {usual} [s]



## **Serial Register, 8-Bit**

### **Terminals**

`vin_d:`     input data lines [V,A]  
`vout_d:`    output data lines [V,A]  
`vclk:`      enable line [V,A]

### **Description**

Input occurs on the rising edge of `vclk`.

### **Instance Parameters**

`vlogic_high` = output voltage for high [V]  
`vlogic_low` = output voltage for low [V]  
`vtrans` = voltages above this at input are considered high [V]  
`tdel, trise, tfall` = {usual} [s]

## Electromagnetic Components

### DC Motor

#### Terminals

`vp`: positive terminal [V,A]

`vn`: negative terminal [V,A]

`pos_shaft`: motor shaft [rad, Nm]

#### Description

This is a model of a DC motor driving a shaft.

#### Instance Parameters

`km` = motor constant [Vs/rad]

`kf` = flux constant [Nm/A]

`j` = inertia factor [Nms<sup>2</sup>/rad]

`d` = drag (friction) [Nms/rad]

`rm` = motor resistance [Ohms]

`lm` = motor inductance [H]

## Electromagnetic Relay

### Terminals

<code>vopen:</code>	normally opened terminal [V,A]
<code>vcomm:</code>	common terminal [V,A]
<code>vclosed:</code>	normally closed terminal [V,A]
<code>vctrl_n:</code>	negative control signal [V,A]
<code>vctrl_p:</code>	positive control signal [V,A]

### Description

This is a model of a voltage-controlled single-pole, double-throw switch. When the voltage differential between `vctrl_p` and `vctrl_n` exceeds `vtrig`, the normally open branch is shorted (closed). Otherwise, the normally open branch stays open. If the open branch is already closed and the voltage differential between `vctrl_p` and `vctrl_n` falls below `vrelease`, the normally open branch is opened.

### Instance Parameters

`vtrig` = input value to close relay [V]  
`vrelease` = input value to open relay [V]

## Three-Phase Motor

### Terminals

<code>vp1, vn1:</code>	phase 1 terminals [V,A]
<code>vp2, vn2:</code>	phase 2 terminals [V,A]
<code>vp3, vn3:</code>	phase 3 terminals [V,A]
<code>pos:</code>	position of shaft [rad, Nm]
<code>shaft:</code>	speed of shaft [rad/s, Nm]
<code>com:</code>	rotational reference point [rad/s, Nm]

### Instance Parameters

<code>km</code>	= motor constant [Vs/rad]
<code>kf</code>	= flux constant [Nm/A]
<code>j</code>	= inertia factor [Nms <sup>2</sup> /rad]
<code>d</code>	= drag (friction) [Nms/rad]
<code>rm</code>	= motor resistance [Ohms]
<code>lm</code>	= motor inductance [H]

## Functional Blocks

### Amplifier

#### Terminals

`signin:`     input (val, flow)

`sigout:`     output (val, flow)

#### Instance Parameters

`gain` = gain between input and output []

`signin_offset` = subtracted from `signin` before amplification (val)

## Comparator

### Terminals

`signin:` (val, flow)

`sigref:` reference to which `signin` is compared (val, flow)

`sigout:` comparator output (val, flow)

### Description

Compares (`signin-sigin_offset`) to `sigref`—the output is related to their difference by a tanh relationship.

If the difference  $\gg \text{sigref}$ , `sigout` is `sigout_high`.

If the difference = `sigref`, `sigout` is  $(\text{sigout\_high} + \text{sigout\_low})/2$ .

If the difference  $\ll \text{sigref}$ , `sigout` is `sigout_low`.

Intermediate points are fitting to a tanh scaled by `comp_slope`.

### Instance Parameters

`sigout_high` = maximum output of the comparator (val)

`sigout_low` = minimum output of the comparator (val)

`signin_offset` = subtracted from `signin` before comparison to `sigref` (val)

`comp_slope` = determines the sensitivity of the comparator []

## **Controlled Integrator**

### **Terminals**

sigin: (val, flow)

sigout: (val, flow)

sigctrl: (val, flow)

### **Description**

Integration occurs while sigctrl is above sigctrl\_trans.

### **Instance Parameters**

sigout0 = initial sigout value (val)

gain = gain []

sigctrl\_trans = if sigctrl is above this, integration occurs (val)

## **Deadband**

### **Terminals**

`signin:`     input (val, flow)

`sigout:`     output (val, flow)

### **Description**

Deadband region is when `signin` is between `signin_dead_high` and `signin_dead_low`. `sigout` is zero in the deadband region. Above the deadband, the output is `signin - signin_dead_high`. Below the deadband, the output is `signin - signin_dead_low`.

### **Instance Parameters**

`signin_dead_high` = upper deadband limit (val)

`signin_dead_low` = lower deadband limit (val)



## Deadband Differential Amplifier

### Terminals

`signin_p, signin_n`: differential input terminals (val, flow)

`sigout`: output terminal (val, flow)

### Description

Outputs `sigout_leak` when differential input (`signin_p-signin_n`) is between `signin_dead_low` and `signin_dead_high`. When outside the deadband, the output is an amplified version of the differential input plus `sigout_leak`.

### Instance Parameters

`signin_dead_low` = lower range of dead band (val)

`signin_dead_high` = upper range of dead band (val)

`sigout_leak` = offset signal; only output in deadband (val)

`gain_low` = differential gain in lower region []

`gain_high` = differential gain in upper region []

## **Differential Amplifier (Opamp)**

### **Terminals**

`sigin_p, sigin_n:` (val, flow)

`sigout:` (val, flow)

### **Description**

`sig_out` is `gain` times the adjusted input differential signal. The adjusted input differential signal is the differential input minus `sigin_offset`.

### **Instance Parameters**

`gain` = amplifier differential gain (val)

`sigin_offset` = input offset (val)

## Differential Signal Driver

### Terminals

`signin_p, signin_n`: differential input signals (val, flow)

`sigout_p, sigout_n`: differential output signals (val, flow)

`sigref`: differential outputs are with reference to this node  
(val, flow)

### Description

Amplifies its differential pair of input by an amount `gain`, producing a differential pair of output signals. The output differential signals appear symmetrically about `sigref`.

### Instance Parameters

`gain = diffdriver gain []`

## **Differentiator**

### **Terminals**

signin: (val, flow)

sigout: (val, flow)

### **Instance Parameters**

gain = []

## **Flow-to-Value Converter**

### **Terminals**

signin\_p, signin\_n:     [V,A]

sigout\_p, sigout\_n:     [V,A]

### **Description**

`val(sigout_p, sigout_n) = flow(signin_p, signin_n)`

### **Instance Parameters**

`gain` = flow to val gain

## Rectangular Hysteresis

### Terminals

signin: (flow, val)

sigout: (flow, val)

### Instance Parameters

hyst\_state\_init = the initial output []

sigout\_high = maximum input/output (val)

sigout\_low = minimum input/output (val)

sigtrig\_low = the signin value that will cause sigout to go low when sigout is high (val)

sigtrig\_high = the signin value that will cause sigout to go high when sigout is low (val)

tdel, trise, tfall = {usual} [s]

## **Integrator**

### **Terminals**

sigin: (val, flow)

sigout: (val, flow)

### **Instance Parameters**

sigout0 = initial sigout value (val)

gain = []

## **Level Shifter**

### **Terminals**

`sigin:`     (val, flow)

`sigout:`    (val, flow)

### **Description**

`sigout` = `sigin` added to `sigshift`.

### **Instance Parameters**

`sigshift` = level shift (val)



## Limiting Differential Amplifier

### Terminals

`signin_p, signin_n:` (val, flow)

`sigout:` (val, flow)

### Description

Has limited output swing. `sigout` is `gain` times the adjusted differential input signal about  $(\text{sigout\_high} + \text{sigout\_low})/2$ . The adjusted differential input signal is the differential input signal minus `signin_offset`.

### Instance Parameters

`sigout_high` = upper amplifier output limit (val)

`sigout_low` = lower amplifier output limit (val)

`gain` = amplifier gain within the limits []

`signin_offset` = input offset (val)

## Logarithmic Amplifier

### Terminals

`signin:` (val, flow)

`sigout:` (val, flow)

### Description

`sigout` is `gain` times the natural log of the absolute value of the adjusted input. The adjusted input is `signin` minus `signin_offset` unless the absolute value of the this is less than `min_signin`. In this case, `min_signin` is used as the adjusted input.

### Instance Parameters

`min_signin` = absolute value of minimum acceptable `signin` (val)

`gain` = (val)

`signin_offset` = input offset (val)

## Multiplexer

### Terminals

`signin1, signin2, signin3:` signals to be multiplexed (val, flow)

`cntrlp, cntrlm:` differential-controlling signal (val, flow)

`sigout:` (val, flow)

### Description

If the differential-controlling signal is below `sigth_high`, `sigout` is `signin1`. If the differential-controlling signal is above `sigth_low`, `sigout` is `signin3`. In between these two thresholds, `sigout = signin2`.

### Instance Parameters

`sigth_high` = high threshold value (val)

`sigth_low` = low threshold value (val)

## Quantizer

### Terminals

sigin: (val, flow)

sigout: (val, flow)

### Description

This model quantizes input with unity gain.

### Instance Parameters

nlevel = number of levels to quantize to []

round = if yes, go to nearest q-level, otherwise go to nearest q-level below []

sigout\_high = maximum input/output (val)

sigout\_low = minimum input/output (val)

tdel, trise, tfall = {usual} [s]

## **Repeater**

### **Terminals**

`signin:`     (val, flow)

`sigout:`     (val, flow)

### **Description**

From 0 to `period`, `sigout` = `signin`. After this, `sigout` is a periodic repetition of what `signin` was between 0 and `period`.

### **Instance Parameters**

`period` = period of repeated waveform (val)

## **Saturating Integrator**

### **Terminals**

signin: (val, flow)

sigout: (val, flow)

### **Description**

The output is the limited integral of the input. The limits are `sigout_max`, `signin_min`. `sigout0` must lie between `sigout_max` and `signin_min`.

### **Instance Parameters**

`sigout0` = initial `sigout` value (val)

`gain` = []

`sigout_max` = maximum signal out (val)

`sigout_min` = minimum signal out (val)

## **Swept Sinusoidal Source**

### **Terminals**

sigout\_p, sigout\_n:      output (val, flow)

### **Description**

The instantaneous frequency of the output is  $\text{sweep\_rate} * \text{time}$  plus  $\text{start\_freq}$ .

### **Instance Parameters**

$\text{start\_freq}$  = start frequency [Hz]

$\text{sweep\_rate}$  = rate of increase in frequency [Hz/s]

$\text{amp}$  = amplitude of output sinusoid (val)

$\text{points\_per\_cycle}$  = number of points in a cycle of the output []

## **Three-Phase Source**

### **Terminals**

`vouta:`     A-phase terminal [V,A]  
`voutb:`     B-phase terminal [V,A]  
`voutc:`     C-phase terminal [V,A]  
`vout_star:`     star terminal [V,A]

### **Instance Parameters**

`amp` = phase-to-phase voltage amplitude [V]  
`freq` = output frequency [Hz]



## **Value-to-Flow Converter**

### **Terminals**

signin\_p, signin\_n: [V,A]

sigout\_p, sigout\_n: [V,A]

### **Description**

`flow(sigout_p, sigout_n) = val(signin_p, signin_n)`

### **Instance Parameters**

`gain` = value-to-flow gain []

## Variable Frequency Sinusoidal Source

### Terminals

`signin`: frequency-controlling signal (val, flow)

`sigout`: (val, flow)

### Description

Outputs a variable frequency sinusoidal signal. Its instantaneous frequency is  $(\text{center\_freq} + \text{freq\_gain} * \text{signin})$  [Hz]

### Instance Parameters

`amp` = amplitude of the output signal (val)

`center_freq` = center frequency of oscillation frequency when `signin = 0` [Hz]

`freq_gain` = oscillator conversion gain (Hz/val)

## Variable-Gain Differential Amplifier

### Terminals

`signin_p, signin_n`: differential input terminals (val, flow)

`sigctrl_p, sigctrl_n`: differential-controlling terminals (val, flow)

`sigout`: (val, flow)

### Description

`sigout` is the product of `gain_const`,  $(\text{sigctrl\_p} - \text{sigctrl\_n})$ , and the adjusted input differential signal added to  $(\text{sigout\_high} + \text{sigout\_low})/2$ . The adjusted input differential signal is the input differential signal minus `signin_offset`.

### Instance Parameters

`gain_const` = amplifier gain when  $(\text{sigctrl\_p} - \text{sigctrl\_n}) = 1$  unit []

`sigout_high` = upper output limit (val)

`sigout_low` = lower output limit (val)

`signin_offset` = input offset (val)

## Magnetic Components

### Magnetic Core

#### Terminals

`mp`: positive MMF terminal [A, Wb]

`mn`: negative MMF terminal [A, Wb]

#### Description

This is a Jiles/Atherton magnetic core model.

#### Instance Parameters

`len` = effective magnetic length of core [m]

`area` = magnetic cross-section area of core [m<sup>2</sup>]

`ms` = saturation magnetization

`gamma` = shaping coefficient

`k` = bulk coupling coefficient

`alpha` = interdomain coupling coefficient

`c` = coefficient for reversible magnetization

## **Magnetic Gap**

### **Terminals**

**mp:** positive MMF terminal [A, Wb]

**mn:** negative MMF terminal [A, Wb]

### **Description**

This is a Jiles/Atherton magnetic gap model.

This model is analogous to a linear resistor in an electrical system.

### **Instance Parameters**

**len** = effective magnetic length of gap [m]

**area** = magnetic cross-section area of gap [m<sup>2</sup>]

## **Magnetic Winding**

### **Terminals**

`vp`: positive voltage terminal [V,A]  
`vn`: negative voltage terminal [V,A]  
`mp`: positive MMF terminal [A, Wb]  
`mn`: negative MMF terminal [A, Wb]

### **Description**

This is a Jiles/Atherton winding model.

### **Instance Parameters**

`num_turns` = number of turns []  
`rturn` = winding resistance per turn [Ohms]

## Two-Phase Transformer

### Terminals

vp\_1, vn\_1: [V,A]

vp\_2, vn\_2: [V,A]

### Description

This is structural transformer model implemented using Jiles/Atherton core and winding primitives

### Instance Parameters

turns1 = number of turns in the first winding []

turns2 = number of turns in the second winding []

rwinding1 = resistance per turn of first winding [Ohms]

rwinding2 = resistance per turn of second winding [Ohms]

len = length of the transformer core [m]

area = area of the transformer core [m<sup>2</sup>]

ms = saturation magnetization

gamma = shaping coefficient

k = bulk coupling coefficient

alpha = interdomain coupling coefficient

c = coefficient for reversible magnetization

## Mathematical Components

### Absolute Value

#### Terminals

`signin:` (val, flow)

`sigout:` (val, flow)

#### Description

`sigout` is the absolute value of `signin`.

#### Instance Parameters

None.



## **Adder**

### **Terminals**

signin1, signin2:     (val, flow)

sigout:             (val, flow)

### **Description**

This model adds two node values.

### **Instance Parameters**

k1 = gain of signin1 []

k2 = gain of signin2 []

## **Adder, 4 Numbers**

### **Terminals**

signin1, signin2, signin3, signin4:     (val, flow)

sigout:                   (val, flow)

### **Description**

$\text{sigout} = \text{gain1} * \text{signin1} + \text{gain2} * \text{signin2} + \text{gain3} * \text{signin3} + \text{gain4} * \text{signin4}$

### **Instance Parameters**

gain1 = gain for signin1 []

gain2 = gain for signin2 []

gain3 = gain for signin3 []

gain4 = gain for signin4 []

## **Cube**

### **Terminals**

`signin:`     (val, flow)

`sigout:`     (val, flow)

### **Description**

`sigout` is the cube of the `signin`.

### **Instance Parameters**

None.

## **Cubic Root**

### **Terminals**

`signin:` (val, flow)

`sigout:` (val, flow)

### **Description**

`sigout` is the cubic root of `signin`.

### **Instance Parameters**

`epsilon` = small number added to `signin` to ensure not getting `pow(0,0.3333.)`, because `pow( )` is implemented using `logs (val)`

## Divider

### Terminals

signumer:     numerator (val, flow)

sigdenom:     denominator (val, flow)

sigout:       (val, flow)

### Description

sigout is gain multiplied by signumer divided by sigdenom unless the absolute value of sigdenom is less than min\_sigdenom. In that case, signumer is divided by min\_sigdenom instead and multiplied by the sign of the sigdenom.

### Instance Parameters

gain = divider gain []

min\_sigdenom = minimum denominator (val)

## Exponential Function

### Terminals

`signin:`     (val, flow)

`sigout:`     (val, flow)

### Description

`sigout` is an exponential function of `signin`. However, if `signin` is greater than `max_signin`, `signin` is taken to be `max_signin`. This is necessary because the exponential function explodes very quickly.

### Instance Parameters

`max_signin` = maximum value of `signin` accepted (val)

## **Multiplier**

### **Terminals**

sigin1, sigin2:     inputs (val, flow)

sigout:            terminals (val, flow)

### **Description**

$\text{sigout} = \text{gain} * \text{sigin1} * \text{sigin2}$

### **Instance Parameters**

gain = gain of multiplier []

## Natural Log Function

### Terminals

signin: (val, flow)

sigout: (val, flow)

### Description

sigout is the natural log of signin, providing  $\text{signin} > \text{min\_signin}$ . If  $\text{signin}$  is between 0 and  $\text{min\_signin}$ , sigout is the log of  $\text{min\_signin}$ . If  $\text{signin}$  is less than 0, an error is reported.

### Instance Parameters

$\text{min\_signin}$  = minimum value of  $\text{signin}$  (val)



## Polynomial

### Terminals

signin: (val, flow)

sigout: (val, flow)

### Description

This is a model of a third-order polynomial function.

$$\text{sigout} = p3 * \text{signin}^3 + p2 * \text{signin}^2 + p1 * \text{signin} + p0$$

### Instance Parameters

p3 = cubic coefficient []

p2 = square coefficient []

p1 = linear coefficient []

p0 = constant coefficient []

## **Power Function**

### **Terminals**

`signin:`     (val, flow)

`sigout:`     (val, flow)

### **Description**

`sigout` is `signin` to the power of `exponent`.

### **Instance Parameters**

`exponent` = what `signin` is raised by []

`epsilon` = small number added to `signin` to ensure not getting `pow(0,0.3333.)`, because `pow( )` is implemented using logs (val)

## **Reciprocal**

### **Terminals**

sigin: (val, flow)

sigout: (val, flow)

### **Description**

sigout is gain/denom

### **Instance Parameters**

gain = gain (val)

min\_sigdenom = minimum denominator (val)

## **Signed Number**

### **Terminals**

signin: (val, flow)

sigout: (val, flow)

### **Description**

This is a model of the sign of the input.

sigout is +1 if signin  $\geq 0$ ; otherwise, sigout is -1.

### **Instance Parameters**

None.

## **Square**

### **Terminals**

`signin:`     

`sigout:`     

### **Description**

`sigout` is the square of the `signin`.

### **Instance Parameters**

None.

## **Square Root**

### **Terminals**

`signin:`     (val, flow)

`sigout:`     (val, flow)

### **Description**

`sigout` is the square root of `signin`.

### **Instance Parameters**

None.

## **Subtractor**

### **Terminals**

`sigin_p`:     input subtracted from (val, flow)  
`sigin_n`:     input that is subtracted (val, flow)  
`sigout`:     (val, flow)

### **Instance Parameters**

None.

## **Subtractor, 4 Numbers**

### **Terminals**

signin1, signin2, signin3, signin4:     (val, flow)

sigout:                   (val, flow)

### **Description**

$\text{sigout} = \text{gain1} * \text{signin1} - \text{gain2} * \text{signin2} - \text{gain3} * \text{signin3} - \text{gain4} * \text{signin4}$

### **Instance Parameters**

gain1 = gain for signin1

gain2 = gain for signin2

gain3 = gain for signin3

gain4 = gain for signin4



## Measure Components

### ADC, 8-Bit Differential Nonlinearity Measurement

#### Terminals

`vd0..vd7`: data lines from ADC [V,A]  
`vout`: voltage sent from conversion to ADC [V,A]  
`vclock`: clocking signal for the ADC [V,A]

#### Description

Measures an 8-bit analog-to-digital converter's (ADC's) differential nonlinearity measurement (DNL) using a histogram method. `vout` is sequentially set to 4,096 equally spaced voltages between `vstart` and `vend`. At each different value of `vout`, a clock pulse is generated causing the ADC to convert this `vout` value. The resultant code of each conversion is stored.

When all the conversions have been done, the DNL is calculated from the recorded data.

If `log_to_file` is `yes`, the DNL (differential nonlinearity) is recorded and written to `filename`.

#### Instance Parameters

`vlogic_high` = [V]  
`vlogic_low` = [V]  
`tsettle` = time to allow for settling after the data lines are changed before `vd0-7` are recorded [s]—also the period of the ADC conversion clock.  
`vstart` = voltage at which to start conversion sweep []  
`vend` = voltage at which to end conversion sweep []  
`log_to_file` = whether to log the results to a file; `yes` or `no` []  
`filename` = the name of the file in which the results are logged []

## ADC, 8-Bit Integral Nonlinearity Measurement

### Terminals

`vd0..vd7`: data lines from ADC [V,A]  
`vout`: voltage sent from conversion to ADC [V,A]  
`vclk`: clocking signal for the ADC [V,A]

### Description

Measures an 8-bit ADC's INL using a histogram method. `vout` is sequentially set to 4,096 equally spaced voltages between `vstart` and `vend`. At each different value of `vout`, a clock pulse is generated causing the ADC to convert this `vout` value. The resultant code of each conversion is stored.

When all the conversions have been done, the INL is calculated from the recorded data.

If `log_to_file` is `yes`, the INL (integral nonlinearity) is recorded and written to *filename*.

### Instance Parameters

`vlogic_high` = [V]  
`vlogic_low` = [V]  
`tsettle` = time to allow for settling after the data lines are changed before `vd0-7` are recorded [s]—also the period of the ADC conversion clock.  
`vstart` = voltage at which to start conversion sweep []  
`vend` = voltage at which to end conversion sweep []  
`log_to_file` = whether to log the results to a file; `yes` or `no` []  
`filename` = the name of the file in which the results are logged []

## **Ammeter (Current Meter)**

### **Terminals**

`vp, vn:` terminals [V,A]

`vout:` measured current converted to a voltage [V,A]

### **Description**

Measures the current between two of its nodes. It has two modes: rms (root-mean-squared) and absolute.

The measurement is passed through a first-order filter with bandwidth `bw` before being written to a file and appearing at `vout`. This is useful when doing rms measurements. If `bw` is set to zero, no filtering is done.

### **Instance Parameters**

`mtype` = type of current measurement; absolute or rms []

`bw` = bw of output filter (a first-order filter) [Hz]

`log_to_file` = whether to log the results to a file; yes or no []

`filename` = the name of the file in which the results are logged []

## **DAC, 8-Bit Differential Nonlinearity Measurement**

### **Terminals**

`vin`: terminal for monitoring DAC output voltages [V,A]

`vd0..vd7`: data lines for DAC [V,A]

### **Description**

Sweeps through all the 256 codes and records the digital-to-analog converter (DAC) output voltage and writes the maximum DNL found to the output.

If `log_to_file` is `yes`, the DNL (differential nonlinearity) is recorded and written to *filename*.

### **Instance Parameters**

`vlogic_high` = [V]

`vlogic_low` = [V]

`tsettle` = time to allow for settling after the data lines are changed before `vin` is recorded [s]

`log_to_file` = whether to log the results to a file; `yes` or `no` []

`filename` = the name of the file in which the results are logged []

## **DAC, 8-Bit Integral Nonlinearity Measurement**

### **Terminals**

`vin`: terminal for monitoring DAC output voltages [V,A]

`vd0..vd7`: data lines for DAC [V,A]

### **Description**

Sweeps through all the 256 codes and records the DAC output voltage and writes the maximum INL found to the output.

If `log_to_file` is `yes`, the INL (integral nonlinearity) is recorded and written to *filename*.

### **Instance Parameters**

`vlogic_high` = [V]

`vlogic_low` = [V]

`tsettle` = time to allow for settling after the data lines are changed before `vin` is recorded [s]

`log_to_file` = whether to log the results to a file; `yes` or `no` []

`filename` = the name of the file in which the results are logged []

## Delta Probe

### Terminals

`start_pos, start_neg:`      signal that controls start of measurement []

`stop_pos, stop_neg:`      signal that controls end of measurement []

### Description

This probe measures argument delta between the occurrence of the starting and stopping events. It can also be used to find when the start and stop signals cross the specified reference values (by default `start_count` and `stop_count` are set to 1).

### Instance Parameters

`start_td, stop_td` = signal delays [s]

`start_val, stop_val` = signal value that starts/end measurement []

`start_count, stop_count` = number of signal values that starts/end measurement

`start_mode` = one of the starting/stopping modes []

`arg`—argument value (simulation time)

`rise`—crossing of the signal value on rise

`fall`—crossing of the signal value on fall

`crossing`—any crossing of the signal value

`stop_mode` = one of the starting/stopping modes []

`arg`—argument value (simulation time)

`rise`—crossing of the signal value on rise

`fall`—crossing of the signal value on fall

`crossing`—any crossing of the signal value

## Find Event Probe

### Terminals

out\_pos, out\_neg:            signal to measure []

start\_pos, start\_neg:        signal that controls start of measurement []

ref\_pos, ref\_neg:            differential reference signal

### Description

This model is of a signal statistics probe. This probe measures the output signal at the occurrence of the event:

- If `arg_val` is given, measure at this value.
- If `start_ref_val` is given, measure the output signal when the start signal crosses this value.
- If `start_ref_val` is not given, measure the output signal when it is equal to the reference signal.

### Instance Parameters

`start` = argument value that starts measurements

`stop` = argument value that stops measurements

`start_td` = signal delays [s]

`start_val` = signal value that starts/ends measurement []

`start_count` = number of signal values that starts/ends measurement

`start_mode` = one of the starting/stopping modes []

`arg`—argument value (simulation time)

`rise`—crossing of the signal value on rise

`fall`—crossing of the signal value on fall

`crossing`—any crossing of the signal value

`start_ref_val` = start signal reference value []

`arg_val` = argument value that controls when to measure signals []

1. If `arg_val` is given, measure at the specified value of the simulation argument. If it is not given, measure at the occurrence of the event.
2. If `start_ref_val` is given, measure the output signal when the start signal is equal to the reference value.
3. If `start_ref_val` is not given, measure the output signal when the start signal is equal to the reference signal.



## Find Slope

### Terminals

out\_pos, out\_neg:            signal to measure []

### Description

This model is of a signal statistics probe.

This probe measures slope of a signal between `arg_val1` and `arg_val2`; if `arg_val2` is not specified, it is set to the value exceeding `arg_val1` by 0.1%.

### Instance Parameters

`arg_val1` = first argument value []

`arg_val2` = (optional) second argument value []

## Frequency Meter

### Terminals

`vp, vn:` terminals [V,A]

`fout:` measured frequency [F,A]

### Description

Measures the frequency of the voltage across the terminals by detecting the times at which the last two zero crossings occurred. This method only works on pure AC waveforms.

### Instance Parameters

`log_to_file` = whether to log the results to a file; `yes` or `no` []

`filename` = the name of the file in which the results are logged []

## Offset Measurement

### Terminals

<code>vamp_out:</code>	output voltage of opamp being measured [V,A]
<code>vamp_p:</code>	positive terminal of opamp being measured [V,A]
<code>vamp_n:</code>	negative terminal of opamp being measured [V,A]
<code>vamp_supply_p:</code>	positive supply of opamp being measured [V,A]
<code>vamp_supply_n:</code>	negative supply of opamp being measured [V,A]

### Description

This is a model of a slew rate measurer.

The opamp terminals of the opamp under test are connected to this model. It shorts `vamp_out` to `vamp_n` and grounds `vamp_vp`. After `tsettle` seconds, the voltage read at `vamp_out` is taken to be offset.

The result is printed to the screen.

### Instance Parameters

<code>vsupply_p</code>	= positive supply voltage required by opamp [V]
<code>vsupply_n</code>	= negative supply voltage required by opamp [V]
<code>tsettle</code>	= time to let opamp settle before measuring the offset [s]

## Power Meter

### Terminals

`iin`: input for current passing through the meter [V,A]

`vp_iout`: positive voltage sensing terminal and output for current passing through the meter [V,A]

`vn`: negative voltage sensing terminal [V,A]

`pout`: measured impedance converted to a voltage [V]

`va_out`: measured apparent power [W]

`pf_out`: measured power factor []

### Description

To measure the power being dissipated in a 2-port device, this meter should be placed in the netlist so that the current flowing into the device passes between `iin` and `vp_iout` first, that `vp_iout` is connected to the positive terminal of the device, and that `vn` is connected to the negative terminal of the device.

The measured power is the average over time of the product of the voltage across and the current through the device. This average is calculated by integrating the VI product and dividing by time and passing the result through a first-order filter with bandwidth `bw`.

The apparent power is calculated by finding the rms values of the current and voltage first and filtering them with a first-order filter of bandwidth `bw`. The apparent power is the product of the voltage and current rms values.

The purpose of the filtering is to remove ripple. Cadence recommends that `bw` be set to a low value to produce accurate measurements and that at least 10 input AC cycles be allowed before the power meter is considered settled. Also allow time for the filters to settle.

This meter requires accurate integration, so it is desirable that the integration method is set to `gear2only` in the netlist.

### Instance Parameters

`tstart` = time to wait before starting measurement [s]

## Cadence Verilog-A Language Reference

### Sample Model Library

---

`bw` = bw of rms filters (a first-order filter) [Hz]

`log_to_file` = whether to log the results to a file; `yes` or `no` []

`filename` = the name of the file in which the results are logged []

## **Q (Charge) Meter**

### **Terminals**

`vp, vn:` terminals [V,A]

`qout:` measured charge [C,A]

### **Description**

Measures the charge that has flown between `vn` and `vp` between `tstart` and `tend`.

### **Instance Parameters**

`tstart` = start time [s]

`tend` = end time [s]

`log_to_file` = whether to log the results to a file; yes or no []

`filename` = the name of the file in which the results are logged []

## **Sampler**

### **Terminal**

`signin:`     `(val, flow)`

### **Description**

Samples `signin` every `tsample` and writes the results to `filename` and labels the data with `label`. The time variable is recorded if `log_time` is `yes`.

### **Instance Parameters**

`tsample` = how often input is sampled [s]

`filename` = name of file where samples are stored []

`label` = label for signal being sampled []

`log_time` = if the time variable should be logged to a file []

## **Slew Rate Measurement**

### **Terminals**

`vamp_out`: output voltage of the opamp being measured [V,A]  
`vamp_p`: positive terminal of the opamp being measured [V,A]  
`vamp_n`: negative terminal of the opamp being measured [V,A]  
`vamp_supply_p`: positive supply of the opamp being measured [V,A]  
`vamp_supply_n`: negative supply of the opamp being measured [V,A]

### **Description**

Monitors the input and records the times at which it equals `vstart` and `vend`. The slew is given to be `vstart - vend` divided by the time difference.

The result is printed to the screen.

### **Instance Parameters**

`vsupply_p` = positive supply voltage required by opamp [V]  
`vsupply_n` = negative supply voltage required by opamp [V]  
`twait` = time to wait before applying pulse to opamp input [V]  
`vstart` = voltage at which to record the first measurement point [V]  
`vend` = voltage at which to record the other measurement point [V]  
`tmin` = minimum time allowed between both measurements before an error is reported [s]



## Signal Statistics Probe

### Terminals

out\_pos, out\_neg:            signal to measure []

start\_pos, start\_neg:        signal that controls start of measurement []

stop\_pos, stop\_neg:         signal that controls end of measurement []

### Description

This probe measures signals such as minimum, maximum, average, peak-to-peak, root mean square, standard deviation of the output, and start signals within a measuring window. It also gives a correlation coefficient between output and start signals.

### Instance Parameters

start\_arg = argument value that starts measurements

stop\_arg = argument value that stops measurements

start\_td, stop\_td = signal delays [s]

start\_val, stop\_val = signal value that starts/end measurement []

start\_count, stop\_count = number of signal values that starts/end measurement

start\_mode = one of starting/stopping modes []

    arg—argument value (simulation time)

    rise—crossing of the signal value on rise

    fall—crossing of the signal value on fall

    crossing—any crossing of the signal value

stop\_mode = one of starting/stopping modes []

    arg—argument value (simulation time)

    rise—crossing of the signal value on rise

`fall`—crossing of the signal value on fall

`crossing`—any crossing of the signal value

## Voltage Meter

### Terminals

`vp, vn:` terminals [V,A]

`vout:` measured voltage [V,A]

### Description

Measures the voltage between two of its nodes. It has two modes: rms (root-mean-squared) and absolute.

The measurement is passed through a first-order filter with bandwidth `bw` before being written to a file and appearing at `vout`. This is useful when doing rms measurements. If `bw` is set to zero, no filtering is done.

### Instance Parameters

`mtype` = type of voltage measurement; absolute or rms []

`bw` = bw of output filter (a first-order filter) [Hz]

`log_to_file` = whether to log the results to a file; yes or no []

`filename` = the name of the file in which the results are logged []

## **Z (Impedance) Meter**

### **Terminals**

`iin`: input for current passing through the meter [V,A]

`vp_iout`: positive voltage-sensing terminal and output for current passing through the meter [V,A]

`vn`: negative voltage sensing terminal [V,A]

`zout`: measured impedance converted to a voltage [Ohms]

### **Description**

To measure the impedance across a 2-port device, this meter should be placed in the netlist so that the current flowing into the device passes between `iin` and `vp_iout` first, that `vp_iout` is connected to the positive terminal of the device, and that `vn` is connected to the negative terminal of the device.

The impedance is calculated by finding the rms values of the current and voltage first and filtering them with a first-order filter of bandwidth `bw`. The impedance is the ratio of these filtered `Irms` and `Vrms` values. The purpose of the filtering is to remove ripple.

Cadence recommends that `bw` be set to a low value to produce accurate measurements and that at least 10 input AC cycles be allowed before the `zmeter` is considered settled. Also allow time for the filters to settle.

The time step size should also be kept small to increase accuracy.

This meter is nonintrusive—that is, it does not drive current in the device being measured. However to work it requires that something else drives current through the device.

### **Instance Parameters**

`bw` = bw of rms filters (a first-order filter) [Hz]

`log_to_file` = whether to log the results to a file; `yes` or `no` []

`filename` = the name of the file in which the results are logged []

## Mechanical Systems

### Gearbox

#### Terminals

wshaft1: shaft of the first gear [rad/s, Nm]

wshaft2: shaft of the second gear [rad/s, Nm]

#### Description

This is a model of two intermeshed gears.

#### Instance Parameters

radius1 = radius of first gear [m]

radius2 = radius of second gear [m]

inertia1 = inertia of first gear [Nms/rad]

inertia2 = inertia of second gear [Nms/rad]

## **Mechanical Damper**

### **Terminals**

posp, posn:            terminals [m, N]

### **Instance Parameters**

d = friction coefficient [N/m]

## **Mechanical Mass**

### **Terminal**

`posin:`      terminal [m, N]

### **Instance Parameters**

`m` = mass [kg]

`gravity` = whether gravity acting on the direction of movement of mass []

## **Mechanical Restrainer**

### **Terminals**

`posp, posn:`      terminals [m, N]

### **Description**

Limits extension of the nodes to which it is attached.

### **Instance Parameters**

`minl` = minimum extension [m]

`maxl` = maximum extension [m]



## **Road**

### **Terminal**

`posin:`      `terminal [m, N]`

### **Description**

This is a model of a road with bumps.

### **Instance Parameters**

`height` = height of bumps [m]

`length` = length of bumps [m]

`speed` = speed [m/s]

`distance` = distance to first bump [m]

## **Mechanical Spring**

### **Terminals**

posp, posn:      terminals [m, N]

### **Instance Parameters**

k = spring constant [N/m]

l = length of the spring [m]

## **Wheel**

### **Terminals**

`posp, posn:`      terminals [m, N]

### **Description**

This is a model of a bearing wheel on a fixed surface.

### **Instance Parameters**

`height` = height of the wheel [m]

## Mixed-Signal Components

### Analog-to-Digital Converter, 8-Bit

#### Terminals

`vin:` [V,A]

`vclk:` [V,A]

`vd0..vd7:` data output terminals [V,A]

#### Description

This ADC comprises 8 comparators. An input voltage is compared to half the reference voltage. If the input exceeds it, bit 7 is set and half the reference voltage is subtracted. If not, bit 7 is assigned zero and no voltage is subtracted from the input. Bit 6 is found by doing an equivalent operation comparing double the adjusted input voltage coming from the first comparator with half the reference voltage. Similarly, all the other bits are found.

Mismatch effects in the comparator reference voltages can be modeled setting `mismatch` to a nonzero value. The maximum `mismatch` on a comparator's reference voltage is +/- `mismatch` percent of that voltage's nominal value.

#### Instance Parameters

`mismatch_fact` = maximum mismatch as a percentage of the average value []

`vlogic_high` = [V]

`vlogic_low` = [V]

`vtrans_clk` = clk high-to-low transition voltage [V]

`vref` = voltage that voltage is done with respect to [V]

`tdel, trise, tfall` = {usual} [s]

## **Analog-to-Digital Converter, 8-Bit (Ideal)**

### **Terminals**

vin: [V,A]

vclk: [V,A]

vd0..vd7: data output terminals [V,A]

### **Description**

This model is ideal because no mismatch is modeled.

### **Instance Parameters**

tdel, trise, tfall = {usual} [s]

vlogic\_high = [V]

vlogic\_low = [V]

vtrans\_clk = clk high-to-low transition voltage [V]

vref = voltage that voltage is done with respect to [V]

## Decimator

### Terminals

vin: [V,A]

vout: [V,A]

vclk: [V,A]

### Description

Produces a cumulative average of  $N$  samples of `vin`. `vin` is sampled on the positive `vclk` transition. The cumulative average of the previous set of  $N$  samples is output until a new set of  $N$  samples has been captured.

Transfer Function:  $1/N * (1 - Z^{-N}) / (1 - Z^{-1})$

### Instance Parameters

$N$  = oversampling ratio [V]

`vtrans_clk` = transition voltage of the clock [V]

`tdel`, `trise`, `tfall` = {usual} [s]

## Digital-to-Analog Converter, 8-Bit

### Terminals

`vd0..vd7:` data inputs [V,A]

`vout:` [V,A]

### Description

Mismatch effects can be modeled in this DAC by setting `mismatch` to a nonzero value. The maximum mismatch on a bit is  $\pm \text{mismatch}$  percent of that bit's nominal value.

### Instance Parameters

`vref` = reference voltage for the conversion [V]

`mismatch_fact` = maximum mismatch as a percentage of the average value []

`vtrans` = logic high-to-low transition voltage [V]

`tdel, trise, tfall` = {usual} [s]

## **Digital-to-Analog Converter, 8-Bit (Ideal)**

### **Terminals**

vd0..vd7:     data inputs [V,A]

vout:        [V,A]

### **Instance Parameters**

vref = reference voltage that conversion is with respect to [V]

vtrans = transition voltage between logic high and low [V]

tdel, trise, tfall = {usual} [s]



## **Sigma-Delta Converter (first-order)**

### **Terminals**

vin: [V,A]

vclk: [V,A]

vout: [V,A]

### **Description**

This is a model of a first-order sigma-delta analog-to-digital converter.

### **Instance Parameters**

vth = threshold voltage of two-level quantizer [V]

vout\_high = range of sigma-delta is 0-vout\_high [V]

vtrans\_clk = transition of voltage of clock [V]

tdel, trise, tfall = {usual}

## **Sample-and-Hold Amplifier (Ideal)**

### **Terminals**

vin:        [V,A]

vclk:      [V,A]

vout:      [V,A]

### **Instance Parameters**

vtrans\_clk = transition voltage of the clock [V]

## Single Shot

### Terminals

vin:        input terminal [V,A]

vout:      output terminal [V,A]

### Description

This model outputs a logic high pulse of duration `pulse_width` if a positive transition is detected on the input.

### Instance Parameters

`pulse_width` = pulse width [s]

`vlogic_high` = output voltage for high [V]

`vlogic_low` = output voltage for low [V]

`vtrans` = voltages above this at input are considered high [V]

`tdel`, `trise`, `tfall` = {usual} [s]

## Switched Capacitor Integrator

### Terminals

vout\_p, vout\_n:      output terminals [V,A]

vin\_p, vin\_n:      input terminals [V,A]

vphi:              switching signal [V,A]

### Instance Parameters

cap\_in = input capacitor value

cap\_fb = feedback capacitor value

vphi\_trans = transition voltage of vphi

## Power Electronics Components

### Full Wave Rectifier, Two Phase

#### Terminals

`vin_top:`      input [V,A]

`tfire:`      delay after positive zero crossing of each phase before phase  
              rectifier fires [s,A]

`vout:`      rectified output voltage [V,A]

#### Instance Parameters

`ihold` = holding current (minimum current for rectifier to work) [A]

`switch_time` = maximum amount of time to spend attempting switch-on [s]

`vdrop_rect` = total rectification voltage drop [V]

## **Half Wave Rectifier, Two Phase**

### **Terminals**

`vin_top:`      input [V,A]

`tfire:`      delay after positive zero crossing of each phase before phase  
              rectifier fires [s,A]

`vout:`      rectified output voltage [V,A]

### **Instance Parameters**

`ihold` = holding current (minimum current for rectifier to work) [A]

`switch_time` = maximum amount of time to spend attempting switch-on [s]

`vdrop_rect` = total rectification voltage drop [V]

## Thyristor

### Terminals

vanode:     anode [V,A]

vcathode:   cathode [V,A]

vgate:     gate [V,A]

### Instance Parameters

iturn\_on = thyristor gate triggering current [A]

ihold = thyristor hold current [A]

von = thyristor on voltage [V]

## Semiconductor Components

### Diode

#### Terminals

vanode: anode voltage [V,A]

vcathode: cathode voltage [V,A]

#### Description

This model is of a diode based on the Shockley equation.

#### Instance Parameters

is = saturation current with negative bias [A]



## **MOS Transistor (Level 1)**

### **Terminals**

vdrain:     drain [V,A]

vgate:     gate [V,A]

vsource:    source [V,A]

vbody:     body [V,A]

### **Description**

This model is of a basic, level-1, Schichmann-Hodges style model of a MOSFET transistor.

### **Instance Parameters**

width = [m]

length = [m]

vto = threshold voltage [V]

gamma = bulk threshold []

phi = bulk junction potential [V]

lambda = channel length modulation []

tox = oxide thickness []

u0 = transconductance factor []

xj = metallurgical junction depth []

is = saturation current []

cj = bulk junction capacitance [F]

vj = bulk junction voltage [V]

mj = bulk grading coefficient []

## Cadence Verilog-A Language Reference

### Sample Model Library

---

$f_c$  = forward bias capacitance factor []

$\tau$  = parasitic diode factor []

$c_{gbo}$  = gate-bulk overlap capacitance [F]

$c_{gso}$  = gate-source overlap capacitance [F]

$c_{gdo}$  = gate-drain overlap capacitance [F]

$dev\_type$  = the type of MOSFET used []

## **MOS Thin-Film Transistor**

### **Terminals**

vdrain:      drain terminal [V,A]  
vgate\_front:      front gate terminal [V,A]  
vsource:      source terminal [V,A]  
vgate\_back:      back gate terminal [V,A]

### **Description**

This model is of a silicon-on-insulator thin-film transistor.

This is a model of a fully depleted back surface thin-film transistor MOSFET model. No short-channel effects.

### **Instance Parameters**

length = length []  
width = width []  
toxf = oxide thickness [m]  
tox b = oxide thickness [m]  
nsub = [cm<sup>-3</sup>]  
ngate = [cm<sup>-3</sup>]  
nbody = [cm<sup>-3</sup>]  
tb = [m]  
u0 = []  
lambda = channel length modulation factor []  
dev\_type = dev\_type []

## **N JFET Transistor**

### **Terminals**

`vdrain:`      drain voltage [V,A]

`vgate:`      gate voltage [V,A]

`vsource:`      source voltage [V,A]

### **Description**

This is a model of an n-channel, junction field-effect transistor.

### **Instance Parameters**

`area` = area []

`vto` = threshold voltage [V]

`beta` = gain []

`lambda` = output conductance factor []

`is` = saturation current []

`gmin` = minimal conductance []

`cjs` = gate-source junction capacitance [F]

`cgd` = gate-drain junction capacitance [F]

`m` = emission coefficient []

`phi` = gate junction barrier potential []

`fc` = forward bias capacitance factor []

## **NPN Bipolar Junction Transistor**

### **Terminals**

vcoll: collector [V,A]  
vbase: base [V,A]  
vemit: emitter [V,A]  
vsubs: substrate [V,A]

### **Description**

This is a gummel-poon style npn bjt model.

### **Instance Parameters**

area = cross-section area  
is = saturation current []  
ise = base-emitter leakage current []  
isc = base-collector leakage current []  
bf = beta forward []  
br = beta reverse []  
nf = forward emission coefficient []  
nr = reverse emission coefficient []  
ne = b-e leakage emission coefficient []  
nc = b-c leakage emission coefficient []  
vaf = forward Early voltage [V]  
var = reverse Early voltage [V]  
ikf = forward knee current [A]

## Cadence Verilog-A Language Reference

### Sample Model Library

---

$i_{kr}$  = reverse knee current [A]  
 $c_{je}$  = capacitance, base-emitter junction [F]  
 $v_{je}$  = voltage, base-emitter junction [V]  
 $m_{je}$  = b-e grading exponential factor []  
 $c_{jc}$  = capacitance, base-collector junction [F]  
 $v_{jc}$  = voltage, base-collector junction [V]  
 $m_{jc}$  = b-c grading exponential factor []  
 $c_{js}$  = capacitance, collector-substrate junction [F]  
 $v_{js}$  = voltage, collector-substrate junction [V]  
 $m_{js}$  = c-s grading exponential factor []  
 $f_c$  = forward bias capacitance factor []  
 $t_f$  = ideal forward transit time [s]  
 $x_{tf}$  =  $t_f$  bias coefficient []  
 $v_{tf}$  =  $t_f$ - $v_{bc}$  dependence voltage [V]  
 $i_{tf}$  = high current factor []  
 $t_r$  = reverse diffusion capacitance [s]

## Schottky Diode

### Terminals

vanode:      anode voltage [V,A]

vcathode:    cathode voltage [V,A]

### Description

This model is of a diode based on the Schockley equation.

### Instance Parameters

area = area of junction    []

is = saturation current []

n = emission coefficient []

cjo = zero-bias junction capacitance [F]

m = grading coefficient []

phi = body potential [V]

fc = forward bias capacitance [F]

tt = transit time [s]

bv = reverse breakdown voltage [V]

rs = series resistance [Ohms]

gmin = minimal conductance [Mhos]

## Telecommunications Components

### AM Demodulator

#### Terminals

`vin`: AM RF input signal [V,A]

`vout`: demodulated signal [V,A]

#### Description

Demodulates the signal in `vin` and outputs it as `vout`.

Consists of four stages in series:

1. RF amp amplifier
2. Detector stage (full wave rectifier)
3. AF filters stage is a low-pass filter that extracts the AF signal—has gain of one, and two poles at `af_wn` [rad/s]
4. AF amp stage amplifies by `af_gain` and adds `af_lev_shift`

#### Instance Parameters

`rf_gain` = gain of RF (radio frequency) stage []

`af_wn` = location of both AF (audio frequency) filter poles [rad/s]

`af_gain` = gain of the audio amplifier []

`af_lev_shift` = added to AF signal after amplification and filtering [V]



## **AM Modulator**

### **Terminals**

vin:        input signal [V,A]

vout:      modulated signal [V,A]

### **Description**

vin is limited to the range between vin\_max and vin\_min. It is also scaled so that it lies within the +/-1 range. This produces vin\_adjusted. vout is given by the following formula:

$$vout = unmod\_amp * (1 + mod\_depth * vin\_adjusted) * \cos(2 * PI * f\_carrier * time)$$

### **Instance Parameters**

f\_carrier = carrier frequency [Hz]

vin\_max = maximum input signal [V]

vin\_min = minimum input signal [V]

mod\_depth = modulation depth []

unmod\_amp = unmodulation carrier amplitude [V]

## **Attenuator**

### **Terminals**

`vin:`        AM input signal [V,A]

`vout:`      rectified AM signal [V,A]

### **Description**

`vout` is attenuated by `attenuation`.

### **Instance Parameters**

`attenuation` =  $20\log_{10}$  `attenuation` [dB]

## Audio Source

### Terminals

vin: [V,A]

vout: [V,A]

### Description

This model synthesizes an audio source. Its output is the sum of 4 sinusoidal sources.

### Instance Parameters

amp1 = amplitude of the first sinusoid [V]

amp2 = amplitude of the second sinusoid [V]

amp3 = amplitude of the third sinusoid [V]

amp4 = amplitude of the fourth sinusoid [V]

freq1 = frequency of the first sinusoid [Hz]

freq2 = frequency of the second sinusoid [Hz]

freq3 = frequency of the third sinusoid [Hz]

freq4 = frequency of the fourth sinusoid [Hz]

## Bit Error Rate Calculator

### Terminals

vin1: [V,A]

vin2: [V,A]

### Description

This model compares the two input signals  $t_{start} + t_{period}/2$  and every  $t_{period}$  seconds later. At the end of the simulation, it prints the bit error rate, which is the number of errors found divided by the number of bits compared.

### Instance Parameters

$t_{start}$  = when to start measuring [s]

$t_{period}$  = how often to compare bits [s]

$v_{trans}$  = voltages above this at input are considered high [V]

## Charge Pump

### Terminals

`vout`: output terminal from which charge pumped/sucked [V,A]  
`vsrc`: source terminal from which charge sourced/sunk [V,A]  
`siginc, sigdec`: Logic signal that controls charge pump operation [V,A]

### Description

This model can source or sink a fixed current, `iamp`. Its mode depends on the values of `siginc` and `sigdec`;

When `siginc > vtrans`, `iamp` amps are pumped from the output. When `sigdec > vtrans`, `iamp` amps are sucked into the output. When both `siginc` and `sigdec` are in the same state, no current is sucked/pumped.

### Instance Parameters

`iamp` = charging current magnitude [A]  
`vtrans` = voltages above this at input are considered high [V]  
`tdel, trise, tfall` = {usual} [s]

## **Code Generator, 2-Bit**

### **Terminals**

vout0, vout1:      output bits [V,A]

### **Description**

Generates a pair of random binary signals.

### **Instance Parameters**

seed = random seed

tperiod = period of output code [s]

vlogic\_high = output voltage for high [V]

vlogic\_low = output voltage for low [V]

tdel, trise, tfall = {usual} [s]

## **Code Generator, 4-Bit**

### **Terminals**

vout\_b0-3:      output bits [V,A]

### **Description**

This model is of a random 4-bit code generator.

This model outputs a different, randomly generated, 4-bit code every `tperiod` seconds.

### **Instance Parameters**

`tperiod` = period of the code generation [s]

`vlogic_high` = output voltage for high [V]

`vlogic_low` = output voltage for low [V]

`tdel, trise, tfall` = {usual} [s]

## Decider

### Terminals

vin: [V,A]

vout: [V,A]

### Description

This model samples this input signal a number of times and outputs the most likely value of the binary data contained in the signal.

A decision on what data is contained in the input is made each `tperiod`. During each decision period, a sample of the input is taken each `tsample`. A count of the number of samples with values greater than  $(vlogic\_high + vlogic\_low)/2$  is kept. If at the end of the period, this count is greater than half the number of samples taken, a logic 1 is output. If it is less than half the number of samples, `vlogic_low` is output. Otherwise, the output is  $(vlogic\_high + vlogic\_low)/2$ .

The sampling starts at `tstart`.

### Instance Parameters

`tperiod` = period of binary data being extracted [s]

`tsample` = sampling period [s]

`vlogic_high` = output voltage for high [V]

`vlogic_low` = output voltage for low [V]

`tstart` = time at which to start sampling [s]

`tdel, trise, tfall` = {usual} [s]



## Digital Phase Locked Loop (PLL)

### Terminals


vin: [V,A]

vout: [V,A]

### Description

The model comprises a number of submodels: digital phase detector, a charge pump, a low-pass filter (LPF), and a digital voltage-controlled oscillator (VCO).

They are arranged in the following way:

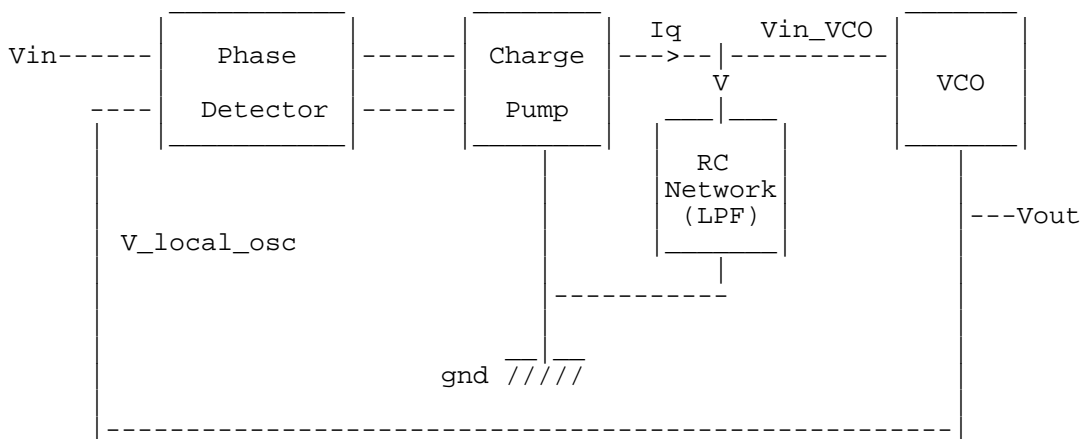

### Instance Parameters

pump\_iamp = amplitude of the charge pump's output current [A]

vco\_cen\_freq = center frequency of the VCO [Hz]

vco\_gain = the gain of the VCO []

lpf\_zero\_freq = zero frequency of LPF (low-pass filter) [Hz]

lpf\_pole\_freq = pole frequency of LPF [Hz]

lpf\_r\_nom = nominal resistance of RC network implementing LPF

## Digital Voltage-Controlled Oscillator

### Terminals

vin: [V,A]

vout: [V,A]

### Description

The output is a square wave with instantaneous frequency:

$\text{center\_freq} + \text{vco\_gain} * \text{vin}$

### Instance Parameters

$\text{center\_freq}$  = center frequency of oscillation frequency when  $\text{vin} = 0$  [Hz]

$\text{vco\_gain}$  = oscillator conversion gain [Hz/volt]

$\text{vlogic\_high}$  = output voltage for high [V]

$\text{vlogic\_low}$  = output voltage for low [V]

$\text{tdel}, \text{trise}, \text{tfall}$  = {usual} [s]

## FM Demodulator

### Terminals

`vin`: FM RF input signal [V,A]

`vout`: demodulated signal [V,A]

### Description

Demodulates the signal in `vin` and outputs it as `vout`.

Consists of four stages in series:

1. RF amp stage amplifiers `vin`
2. Detector stage is a phase locked loop (PLL)
3. AF filters stage is a low-pass filter that extracts the AF signal. The filter has gain of one, and two poles at `af_wn` [rad/s]
4. AF amp stage amplifies by `af_gain` and adds `af_lev_shift`.

### Instance Parameters

`rf_gain` = gain of RF (radio frequency) stage []

`pll_out_bw` = bandwidth of PLL output filter [Hz]

`pll_vco_gain` = gain of the PLL's VCO []

`pll_vco_cf` = the center frequency of the PLLs [Hz]

`af_wn` = location of both AF (audio frequency) filter poles [Hz]

`af_gain` = gain of the audio amplifier []

`af_lev_shift` = added to AF signal after amplification and filtering [V]

## **FM Modulator**

### **Terminals**

vin:        input signal [V,A]

vout:      modulated signal [V,A]

### **Description**

$v_{out} = amp * \sin (phase)$

where  $phase = integ (2 * PI * f_{carrier} + vin_{gain} * vin)$

### **Instance Parameters**

$f_{carrier}$  = carrier frequency [Hz]

amp = amplitude of the FM modulator output []

vin\_gain = amplification of vin\_signal before it is used to modulate the FM carrier signal []

## Frequency-Phase Detector

### Terminals

`vin_if`: signal whose phase is being detected [V,A]

`vin_lo`: signal from local oscillator [V,A]

`sigout_inc`: logic signal to control charge pump [V,A]

`sigout_dec`: logic signal to control charge pump [V,A]

### Description

The `freq_ph_detector` can have three states: `behind`, `ahead`, and `same`. The specific state is determined by the positive-going transitions of the signals `vin_if` and `vin_lo`.

Positive transitions on `vin_if` causes the state to become the next higher state unless the state is already `ahead`.

Positive transitions on `vin_lo` cause the state to become the next lower state unless the state is already `behind`.

The output depends on the state the detector is in:

`ahead => sigout_inc = high, sigout_dec = low`

`same => sigout_inc = high, sigout_dec = high`

`behind => sigout_inc = low, sigout_dec = high`

The output signals are expected to be used by a `charge_pump`.

### Instance Parameters

`vlogic_high` = output voltage for high [V]

`vlogic_low` = output voltage for low [V]

`vtrans` = voltages above this at input are considered high [V]

`tdel, trise, tfall` = {usual} [s]

## **Mixer**

### **Terminals**

vin1, vin2: [V,A]

vout: [V,A]

### **Description**

$vout = gain * vin1 * vin2$

### **Instance Parameters**

gain = gain of mixer []

## Noise Source

### Terminals

vin:        [V,A]

vout:      [V,A]

### Description

This is an approximate white noise source.

**Note:** It is *not* a true white source because its output changes every time step and the time step is dependent on the behavior of the circuit.

### Instance Parameters

amp = amplitude of the output signal about 0 [V]

## PCM Demodulator, 8-Bit

### Terminals

`vin:`        input signal [V,A]

`vout:`       demodulated signal [V,A]

### Description

The PCM demodulator samples `vin` at `bit_rate` [Hz] starting at `tstart + 0.5/bit_rate`. Each set of 8 samples is considered a binary word, and these sets are converted to an output voltage using a linear 8-bit binary code with 0 representing `vin_min` and 255 representing `vin_max`. The first bit received is the LSB, bit 0; the last bit received is the MSB, bit 7.

The output rate is `bit_rate/8`.

### Instance Parameters

`freq_sample` = sample frequency [Hz]

`tstart` = when to start sampling [s]

`vout_min` = minimum input voltage [V]

`vout_max` = maximum input voltage [V]

`vtrans` = voltages above this at input are considered high [V]

`tdel, trise, tfall` = {usual} [s]



## PCM Modulator, 8-Bit

### Terminals

`vin`: input signal [V,A]

`vout`: modulated signal [V,A]

### Description

The PCM modulator samples `vin` at a `sample_freq` [Hz] starting at `tstart`. Once a sample has been obtained, it is converted to a linear 8-bit binary code with 0 representing `vin_min` and 255 representing `vin_max`.

The bits are in the code and are sequentially put through `vout` at a rate 8 times `sample_freq` with `vlogic_high` signifying a 1 and `vlogic_low` signifying a 0. The first bit transmitted is the LSB, bit 0; the last bit transmitted is the MSB, bit 7.

Clipping occurs when the input is outside `vin_min` and `vin_max`.

### Instance Parameters

`sample_freq` = sample frequency [Hz]

`tstart` = when to start sampling [s]

`vin_min` = minimum input voltage [V]

`vin_max` = maximum input voltage [V]

`vlogic_high` = output voltage for high [V]

`vlogic_low` = output voltage for low [V]

`tdel`, `trise`, `tfall` = {usual} [s]

## **Phase Detector**

### **Terminals**

`vlocal_osc`: local oscillator voltage [V,A]

`vin_rf`: PLL radio frequency input voltage [V,A]

`vif`: intermediate frequency output voltage [V,A]

### **Instance Parameters**

`gain` = gain of detector []

`mtype` = type of phase detection to be used; chopper or multiplier []

## **Phase Locked Loop**

### **Terminals**

vlocal\_osc: local oscillator voltage [V,A]

vin\_rf: PLL radio frequency input voltage [V,A]

vout: voltage proportional to the frequency being locked onto [V,A]

vout\_ph\_det: output of the phase detector [V,A]

### **Instance Parameters**

vco\_gain = gain of VCO cell [Hz/V]

vco\_center\_freq = VCO oscillation frequency [Hz]

phase\_detect\_type = type of phase detection cell to be used []

vout\_filt\_bandwidth = bandwidth of the low-pass filter on output [Hz]

## PM Demodulator

### Terminals

`vin`: PM RF input signal [V,A]

`vout`: demodulated signal [V,A]

### Description

Demodulates the signal in `vin` and outputs it as `vout`.

Consists of four stages in series:

1. RF amp stage amplifiers `vin`.
2. Detector stage is a phase locked loop (PLL)—the phase detector output is tapped.
3. AF filters stage is a low-pass filter that extracts the AF signal—has gain of one, and two poles at `af_wn` [rad/s].
4. AF amp stage amplifies by `af_gain` and adds `af_lev_shift`.

### Instance Parameters

`rf_gain` = gain of RF (radio frequency) stage []

`pll_out_bw` = bandwidth of PLL output filter [Hz]

`pll_vco_gain` = gain of the PLL's VCO []

`pll_vco_cf` = the center frequency of the PLLs [Hz]

`af_wn` = location of both AF (audio frequency) filter poles [Hz]

`af_gain` = gain of the audio amplifier []

`af_lev_shift` = added to AF signal after amplification and filtering [V]

## **PM Modulator**

### **Terminals**

`vin:`        input signal [V,A]

`vout:`      modulated signal [V,A]

### **Description**

`vout = amp * sin(2 * PI * f_carrier * time + phase_max * vin_adjusted)`

where `vin_adjusted` is scaled version of `vin` that lies within the +/-1 range.

Before scaling, `vin` is limited to the range between `vin_max` and `vin_min` by clipping.

### **Instance Parameters**

`f_carrier` = carrier frequency [Hz]

`amp` = amplitude of the PM modulator output []

`vin_max` = maximum acceptable input (clipping occurs above this) [V]

`vin_min` = minimum acceptable input (clipping occurs above this) [V]

`phase_max` = the phase shift produced when the modulating signal is at `vin_max` [rad]

## QAM 16-ary Demodulator

### Terminals

`vin:`           input [V,A]

`vout_bit[0-4]:`    demodulated codes [V,A]

### Description


This model is of a QPSK (quadrature phase shift key) modulator.

Demodulates a 16ary encoded QAM signal by separately sampling the input signal at 90 degrees (q-phase) and 180 degrees (i-phase).

This model does not contain a dynamic synchronizing mechanism for ensuring that sampling occurs at the correct time points. Synchronizing can be statically adjusted by changing `tstart`. `tstart` should correspond to when the input QAM signal is at 0 degrees.

The i-phase contains the two MSBs. The q-phase contains the two LSBs.

The constellation diagram representing this relationship follows.

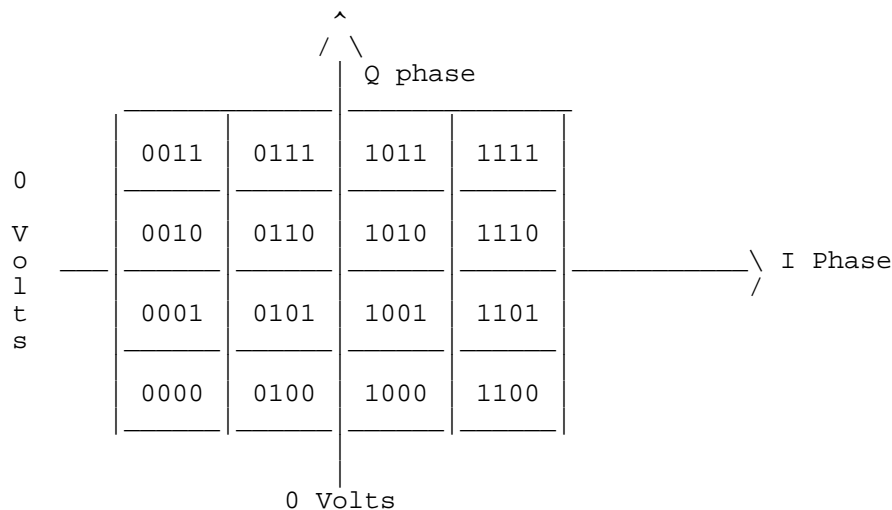

Each code box is `vbox_width` volts wide.

### Instance Parameters

`freq` = demodulation frequency [Hz]

## **Cadence Verilog-A Language Reference**

### **Sample Model Library**

---

`vbox_width` = width of modulation code box in constellation diagram [V]

`vlogic_high` = output voltage for high [V]

`vlogic_low` = output voltage for low [V]

`tdel, trise, tfall` = {usual} [s]

## Quadrature Amplitude 16-ary Modulator

### Terminals


vin\_b[0-3]: bits of input code [V,A]

vout: modulated output [V,A]

### Description

This model does 16 value (4-Bit) QAM.

It encodes the MSBs on the i-phase and the LSBs on the q-phase. Its constellation diagram can be represented as

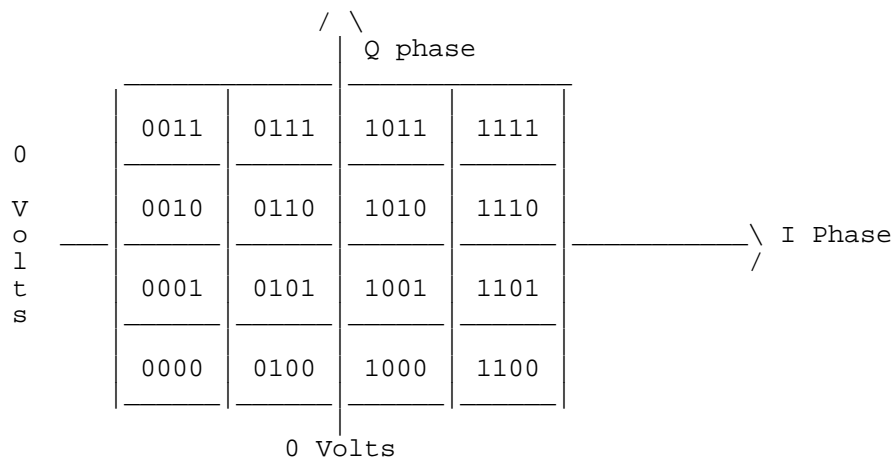

The two MSBs are encoded on the i-phase. The two LSBs are encoded on the q-phase.

The modulating formula is  $V_{out} = i\_phase * \cos(wt) + q\_phase * \sin(wt)$

i\_phase and q\_phase vary between -phase\_ampl and phase\_ampl.

### Instance Parameters

freq = modulation frequency [Hz]

phase\_ampl = amplitude of the i-phase and q-phase signals [V]

vtrans = voltages above this at input are considered high [V]

tdel, trise, tfall = {usual} [s]



## **QPSK Demodulator**

### **Terminals**

`vin:`        input [V,A]  
  
`vout_i:`     i-phase output [V,A]  
  
`vout_q:`     q-phase output [V,A]

### **Description**

Does a QPSK demodulation on the input signal. It does not contain a dynamic synchronizing mechanism. Synchronizing can be adjusted by changing `tstart`.

Detection works by separately sampling the i-phase of `vin` and the q-phase of `vin` at `freq` Hz and 90 degrees out of phase. The first i-phase sample is done at `tstart + 0.5/freq`, the next  $1/freq$  seconds later, etc. Similarly, the first q-phase sample is done at `tstart + 0.25/freq`, the next  $1/freq$  seconds later, and so on.

For the i-phase, a high is detected if the sample  $< -vthresh$ . For the q-phase, a high is detected if the sample  $> vthresh$ .

### **Instance Parameters**

`freq` = demodulation frequency [Hz]  
  
`vthresh` = threshold detection voltage [V]  
  
`vlogic_high` = output voltage for high [V]  
  
`vlogic_low` = output voltage for low [V]  
  
`tstart` = time at which demodulation starts [s]  
  
`tdel, trise, tfall` = {usual} [s]

## **QPSK Modulator**

### **Terminals**

`vin_i, vin_q:`      quadrature inputs [V,A]

`vout:`            modulator output [V,A]

### **Description**

This takes two sampled quadrature inputs and does QPSK modulation on them.

### **Instance Parameters**

`freq` = modulation frequency [Hz]

`amp` = modulator amplitude [V]

`vtrans` = voltages above this at input are considered high [V]

`tdel, trise, tfall` = {usual} [s]

## **Random Bit Stream Generator**

### **Terminal**

vout: [V,A]

### **Description**

This model generates a random stream of bits.

### **Instance Parameters**

tperiod = period of stream [s]

seed = random number seed []

vlogic\_high = output voltage for high [V]

vlogic\_low = output voltage for low [V]

tdel, trise, tfall = {usual} [s]

## Transmission Channel

### Terminals

`vin`: AM input signal [V,A]

`vout`: rectified AM signal [V,A]

### Description

`vin` has `noise_amp` noise added to it and the resultant is attenuated by `attenuation` [dB].

### Instance Parameters

`attenuation` =  $20\log_{10}$  attenuation [dB]

`noise_amp` = amplitude of noise added to `vin` *before* attenuation [V]

## **Voltage-Controlled Oscillator**

### **Terminals**

`vin:`        oscillation-controlling voltage [V,A]

`vout:`       [V,A]

### **Instance Parameters**

`amp` = amplitude of the output signal [V]

`center_freq` = center frequency of oscillation frequency when `vin` = 0 [Hz]

`vco_gain` = oscillator conversion gain [Hz/volt]



---

## Verilog-A Keywords

---

This appendix contains the list of the Cadence® Verilog®-A language keywords. *Keywords* are predefined nonescaped identifiers that are used to define the language constructs. Some keywords are not used in this release.

The simulator does not interpret a Verilog-A keyword preceded by a backslash character as a keyword. For more information, see “[Identifiers](#)” on page 46.

above	cmos	endtable
abs	connectrules	endtask
absdelay	cos	event
acos	cosh	exclude
acosh	cross	exp
ac_stim	ddt	final_step
aliasparam	ddx	flicker_noise
always	deassign	floor
analog	default	flow
analysis	defparam	for
and	delay	force
asin	disable	forever
asinh	discipline	fork
assign	discontinuity	from
atan	driver_update	function
atan2	edge	generate
atanh	else	genvar
begin	end	ground
bound_step	endcase	highz0
branch	endconnectrules	highz1
buf	enddiscipline	hypot
bufif0	endfunction	idt
bufif1	endmodule	idtmod
case	endnature	if
casex	endparamset	ifnone
casez	endprimitive	inf
ceil	endspecify	initial

## Cadence Verilog-A Language Reference

### Verilog-A Keywords

---

initial_step	posedge	table_model
inout	potential	tan
input	pow	tanh
integer	primitive	task
join	pull0	temperature
laplace_nd	pull1	time
laplace_np	pullup	timer
laplace_zd	pulldown	tran
laplace_zp	pwr	tranif0
large	rcmos	tranif1
last_crossing	real	transition
limexp	realtime	tri
ln	reg	tri0
localparam	release	tri1
log	repeat	triand
macromodule	rnmos	trior
max	rpmos	triereg
medium	rtran	vectored
min	rtranif0	vt
module	rtranif1	wait
nand	scalared	wand
nature	sin	weak0
negedge	sinh	weak1
net_resolution	slew	while
nmos	small	white_noise
noise_table	specify	wire
nor	specparam	wor
not	sqrt	wreal
notif0	strobe	xnor
notif1	strong0	xor
or	strong1	zi_nd
output	supply0	zi_np
parameter	supply1	zi_zd
pmos	table	zi_zp



## **Keywords to Support Backward Compatibility**

The keywords in this section are provided for backward compatibility.

<code>abstol</code>	<code>delay</code>	<code>units</code>
<code>access</code>	<code>discontinuity</code>	<code>vt</code>
<code>bound_step</code>	<code>idt_nature</code>	
<code>ddt_nature</code>	<code>temperature</code>	

# **Cadence Verilog-A Language Reference**

## Verilog-A Keywords

---

---

## Understanding Error Messages

---

When you use the Cadence® Verilog®-A language within the Cadence analog design environment, the compiler and simulator send error messages to the veriloga Parser Error/Warnings window or to the Command Interpretation Window (CIW) and the log file. When you run Verilog-A outside the Cadence analog design environment, error messages are sent to the standard output.

The following module contains an error in the line containing the first `$strobe` statement. The variable `xx` is referenced there but has not been declared.

```
`include "disciplines.vams"

module prove_v(vin, vgnd) ;
input vin, vgnd ;
electrical vin, vgnd ;

analog begin
    $strobe("%f, %f", xx, V(vin,vgnd));    // ERROR! xx not declared
    $strobe("lo");
end
endmodule
```

Verilog-A produces the following error message when it attempts to compile module `prove_v`.

```
Error found by spectre during AHDL read-in.
"unknown_id.va", line 8: "$strobe("%f, %f", xx,<<--?
    V(vin,vgnd));"
"unknown_id.va", line 8: Error: undeclared symbol: xx.
"unknown_id.va", line 8: Error: argument #3 does not
    match %f in argument #1; real expected.
```

There are two main forms of error messages: the token indication form and the description form. In the example above, the first error message is a token indication message. The token indicator `<<--?` points to the first token on a line where Verilog-A finds an error.

The other error messages are description error messages. The first description error message corresponds to the token indication error message.

For some errors, Verilog-A gives the message `syntax error`. This means that the compiler is unable to determine the exact cause of the error. To find the problem, look where the token

## Cadence Verilog-A Language Reference

### Understanding Error Messages

---

indicator is pointing. Look also at the preceding line to see if there is anything wrong with it, such as a missing semicolon. For example, the following module is missing a semicolon in line 9.

```
`include "disciplines.vams"

module probe_v2(vout, vin_p, vin_n) ;
input vin_p, vin_n ;
output vout ;
electrical vout, vin_p, vin_n ;

analog begin
    $strobe("hi") // ERROR! Missing semicolon.
    $strobe("lo") ;
    V(vout) <+ V(vin_p,vin_n) ;
end

endmodule
```

However, the problem is reported as a syntax error in line 10.

```
Error found by spectre during AHDL read-in.
"miss_semil.va", line 10: "$<--? strobe("lo");"
"miss_semil.va", line 10: Error: syntax error
```

If the compiler reports another error before a syntax error, fix the first error and try to compile the Verilog-A file again. Subsequent syntax errors might actually be a result of an initial error. A single mistake can result in a number of error messages.

Token indication error messages report only one error per line. The compiler, however, can generate multiple description error messages about other errors on that line.

---

## Getting Ready to Simulate

---

This appendix explains how to set up a simulation of a circuit described in the Cadence® Verilog®-A language. For information, see the sections

- [Creating a Verilog-A Module Description](#) on page 478
- [Creating a Spectre Netlist File](#) on page 480
- [Modifying Absolute Tolerances](#) on page 483
- [Using the Compiled C Code Flow](#) on page 487

Except as noted, this appendix assumes that you are working outside of the Cadence analog design environment. For information on working inside the design environment, see [Chapter 12, “Using Verilog-A in the Cadence Analog Design Environment.”](#)

## Creating a Verilog-A Module Description

Use a text editor to create the following file, which contains a Verilog-A description of a simple resistor. Save the file with the name `res.va`. Alternatively, you can copy the example from the sample model library

`your_install_dir/tools/dfII/samples/artist/spectreHDL/Verilog-A/basic/res.va`

Lines beginning with `//` are comment lines and are ignored by the simulator.

```
// res.va, a simple resistor

`include "disciplines.vams"
`include "constants.vams"

module res(vp, vn);
  inout vp, vn;
  electrical vp, vn;
  parameter real r = 0;

  analog
    V(vp, vn) <+ r*I(vp, vn);
endmodule
```

### File Extension .va

The simulator expects all files containing Verilog-A modules to have the file extension `.va`. The simulator uses the file extension to identify which language is used in a file.

### include Compiler Directive

With the Verilog-A ``include` compiler directive, you can include another file in the current file. The compiler copies the included file into the current file and applies any compiler directives currently in effect to the included file. If the included file itself contains any compiler directives, the compiler applies them to the rest of the file that is doing the including. For additional information, see [“Including Files at Compilation Time”](#) on page 196.

With the filename on the ``include` directive, you can specify a full or relative path. As explained below, the path and filename that you specify control where the compiler searches for the file to be included.

File `res.va`, in the previous example, includes two files: `disciplines.vams` and `constants.vams`. These files are part of the Cadence distribution. The `disciplines.vams` file contains definitions for the standard natures and disciplines. In particular, `disciplines.vams` includes a definition of the `electrical` discipline

## Cadence Verilog-A Language Reference

### Getting Ready to Simulate

---

referenced in `res.va`. If your module, like most Verilog-A modules, uses the standard disciplines, you must include the `disciplines.vams` file.

The `constants.vams` file contains definitions of commonly used mathematical and physical constants such as Pi and Boltzmann's constant. If your module uses the standard constants, you must include the `constants.vams` file. The module `res` does not use any of the standard constants, so the example includes the `constants.vams` file only for consistency.

The contents of the `disciplines.vams` and `constants.vams` files are listed in [Appendix C, "Standard Definitions."](#) The files are located in the directory

`your_install_dir/tools/spectre/etc/ahdl`

where `your_install_dir` is the path to the Cadence installation directory.

### Absolute Paths

If you specify an absolute path (one that starts with `/`), the compiler searches for the include file only in the specified directory. If the file is not in this directory, the compiler issues an error message.

This is an example using an absolute path:

```
`include "/usr/local/include/disciplines.vams"
```

### Relative Paths

A relative path is one that starts with `./`, `../`, or `dir/`, where `dir` is a subdirectory. If you specify a relative path for the ``include` compiler directive, the compiler searches relative to the directory containing the Verilog-A file (`.va` file) that contains the ``include` directive. If the file to be included is not in the directory specified by the relative path, the compiler issues an error message.

If you specify a relative path such as

```
`include "./disciplines.vams"
```

the compiler looks only in the directory that contains the file with the ``include` directive.

If you specify a relative path such as

```
`include "../disciplines.vams"
```

the compiler looks only in the parent directory of the `.va` file with the ``include` directive.

The next example illustrates how you might include a capacitor model from a subdirectory that is two levels below the current directory.

```
`include "models/vloga/cap.va"
```

The final relative path example illustrates how you might include a flip-flop module definition located in a sibling directory.

```
`include "../logic/flip_flop.va"
```

## Simple Filename

If you do not specify a path in the filename, the compiler searches the following three places, in the order given.

1. The directory that contains the file with the ``include` directive
2. The directory specified by the `CDS_VLOGA_INCLUDE` environment variable, if the variable is set
3. The directory specified by

`your_install_dir/tools/dfII/samples/artist/spectreHDL/include`

where `your_install_dir` is the path to the Cadence installation directory

Usually, this applies when you include the `disciplines.vams` and `constants.vams` files. As a result, you generally do not have to worry about the location of these files.

If the file is not in any of the three places, the compiler issues an error message. If the file exists in more than one of these places, the first one encountered is included.

## Creating a Spectre Netlist File

To use the module defined in `res.va` you must *instantiate* it. To instantiate a module, you prepare a Spectre netlist file that directly or hierarchically creates one or more named instances of the module, instances of other required modules, and any required simulation stimuli and analysis descriptions. In this release of Verilog-A, you must instantiate at least one module directly in the netlist file. Instantiated modules can hierarchically instantiate other modules within themselves by using the support provided by the Verilog-A language. See [Chapter 10, “Instantiating Modules and Primitives,”](#) for more information.

Use a text editor to create the following netlist file. Save the file with the name `res.ckt`. Alternatively, you can copy the example from the sample model library:

```
your_install_dir/tools/dfII/samples/artist/spectreHDL/Verilog-A/basic/test/  
res.ckt
```



## Cadence Verilog-A Language Reference

### Getting Ready to Simulate

---

where *your\_install\_dir* is the path to the Cadence installation directory.

```
// netlist file
// res test circuit
//

global gnd
simulator lang=spectre

ahdl_include "res.va"

i1 in gnd isource dc=1m
r1 in gnd res r=1k

saveNodes options save=allpub

paramSwp dc start=1 stop=1001 param=r dev=r1
```

**Note:** If you copy `res.ckt` from the sample model library, be sure to edit the file and remove the `../` part from the relative path in the `ahdl_include` statement.

The netlist file `res.ckt` includes the Verilog-A description file `res.va` by using the `ahdl_include` statement. When the simulator encounters an `ahdl_include` statement in the netlist file, it looks at the filename extension to determine how to compile the source description. Because of the `.va` file extension, the simulator expects the included file to contain a Verilog-A description and compiles it accordingly.

The `res.ckt` netlist file creates an instance `i1` of a current source and an instance `r1` of a resistor. The current source is an example of a built-in Spectre primitive component. The resistor is an instance of the Verilog-A module that you specified in `res.va`.

The last line in the netlist file tells Spectre to simulate the component behavior as the parameter `r` of instance `r1` sweeps from 1 ohm to 1,001 ohms.

## Including Files in a Netlist

Use the `ahdl_include` Spectre statement to include Verilog-A module description files in a netlist file. The `ahdl_include` statement has the form

```
ahdl_include "filename" [ -master mapped_name ]
```

If *filename* is not in the same directory as the netlist, you must ensure that *filename* either includes the complete path to the module file or is on the path specified in the `-I` option when you start Spectre.

The optional `-master` option allows you to use multiple views of a single module in a circuit. With this option, modules that share the same name but are defined in different files can be

## Cadence Verilog-A Language Reference

### Getting Ready to Simulate

---

used in the same circuit. For example, the following two modules have the same name but different definitions.

The first module is defined in the file `va_res.va`.

```
`include "discipline.h"
`include "constants.h"

module res_va(plus, minus);
  inout plus, minus;
  electrical plus, minus;
  parameter real lr=1;
  parameter real wr=1;
  parameter real rsh=1;
  parameter real dw=1;

  real r;

  analog begin
    r=rsh*lr/(4.0*(wr-2*dw));
    V(plus, minus) <+ r*I(plus, minus);
  end
endmodule
```

The next module is defined in the file `another_res.va`.

```
`include "discipline.h"
`include "constants.h"

module res_va(plus, minus);
  inout plus, minus;
  electrical plus, minus;
  parameter real lr=1;
  parameter real wr=1;
  parameter real rsh=1;
  parameter real dw=1;

  real r;

  analog begin
    r=rsh*lr/(8*(wr-4*dw));
    V(plus,minus) <+ r*I(plus,minus);
  end
endmodule
```

## Cadence Verilog-A Language Reference

### Getting Ready to Simulate

---

To use both of these modules in a netlist, one of them is mapped to a different name with the `-master` option, as illustrated by the following netlist file. Notice how both the original `res_va` and the `res_va` that is mapped to the name `res_va_mapped` can be instantiated.

```
// netlist file
// res test circuit
//
ahdl_include "va_res.va"
ahdl_include "another_res.va" -master res_va_mapped
ar1 1 0 res_va
r2 1 0 res_va_mapped
saveNodes options save=allpub
tranRsp tran start=0 stop=10m
```

When you use Verilog-A within the Cadence analog design environment, the `-master` switch is inserted for you automatically as needed. For example, if you select modules from two different libraries, or have multiple Verilog-A views for a single cell that have the same module name, the netlister automatically maps module names as necessary and adds the `-master` switch to the instantiation.

## Naming Requirements for SPICE-Mode Netlisting

If you want to mix SPICE-mode netlisting (primitive types identified by the first character of the instance name) into the same module definition text file, you must use only lowercase characters in the names of modules, nodes, and parameters.

## Modifying Absolute Tolerances

Verilog-A nature definitions allow you to specify the absolute tolerance (`abstol`) values used by the simulator to determine when convergence occurs during a simulation. The `disciplines.vams` file contains statements that specify default values of `abstol` for the standard natures. You can override these default values, if you wish, by using one of the following two techniques:

- When using Spectre standalone, you can use the ``define` compiler directive in conjunction with the `disciplines.vams` include file.
- When using Spectre in the Cadence analog design environment, you can use Spectre quantities in the netlist file.

## Modifying abstol in Standalone Mode

The following text describes how to modify `abstol` for the nature `Voltage` in one place and to have the Verilog-A modules in all your source files use the new `abstol`. This involves specifying the tolerance using a Verilog-A ``define` compiler directive, followed by including the `disciplines.vams` header file, which is then followed by the files containing the module descriptions.

Consider a resistor module specified in the file `my_res.va` and a capacitor module specified in the file `my_cap.va`.

```
// file "my_res.va", a simple resistor

module res(vp, vn);
  inout vp, vn;
  electrical vp, vn;
  parameter real r = 0;
  analog
    V(vp, vn) <+ r*I(vp, vn);
endmodule

// file "my_cap.va", a simple capacitor

module cap(vp, vn);
  inout vp, vn;
  electrical vp, vn;
  parameter real c = 1n;

  analog
    I(vp, vn) <+ c*ddt(V(vp, vn));
endmodule
```

The main instantiating circuit is described in file `my_rc.va`.

```
// file "my_rc.va" an rc filter
// this module uses hierarchical instantiation only

`define VOLTAGE_ABSTOL 1e-7
`include "disciplines.vams" // this will use `VOLTAGE_ABSTOL of 1e-7

`include "my_res.va" // include the resistor description
`include "my_cap.va" // include the capacitor description

module my_rc( in, out, gnd );
  inout in,out,gnd;
  electrical in,out,gnd;
  parameter real r=1;
  parameter real c=1n;

  res #(.r(r)) r1 ( in, out );
  cap #(.c(c)) c1 ( out, gnd );

endmodule
```

## Cadence Verilog-A Language Reference

### Getting Ready to Simulate

---

The ``define` compiler directive in `my_rc.va` sets the `abstol` value that is to be used by the nature `Voltage` (and the `electrical` discipline) in one place, before the `disciplines.vams` file is included. As a result, the nature `Voltage` is defined with the specified absolute tolerance of `1e-7` when the `disciplines.vams` file is processed. You can override the default absolute tolerances for other natures in the same way.

The descriptions for the resistor and capacitor modules are not given in the file `my_rc.va`, but instead they are included into this file by the ``include` compiler directive. Because the `disciplines.vams` file is included only once, the natures and disciplines it defines are used by both the resistor module and the capacitor module. In this example, both modules use an absolute tolerance for `Voltage` of `1e-7`.

Because modules `res` and `cap` are hierarchically instantiated in module `my_rc.va`, the netlist file `my_rc.ckt` contains only one `ahdl_include` statement.

```
// netlist file
// file "my_rc.ckt", rc_filter test circuit
//

global gnd
simulator lang=spectre

ahdl_include "my_rc.va"

// input voltage to filter
il in gnd vsource type=sine freq=1k

// instantiate an rc filter
f1 in out gnd my_rc r=1k c=1u

// run transient analysis
tranRsp tran start=0 stop=10m
```

## Modifying abstol in the Cadence Analog Design Environment

Another way to modify absolute tolerances is to use the Spectre netlist `quantity` statement. A Spectre netlist `quantity` can be used to specify or modify information about particular types of signals, such as their units, absolute tolerances, and maximum allowed change per Newton iteration. The values specified on a `quantity` statement override any values specified in the `disciplines.vams` include file. For more information, see [“Defining Quantities”](#) on page 214.

Every nature has a corresponding quantity that can be accessed in the Spectre netlist. The name of the quantity is the access function of the nature.

## Cadence Verilog-A Language Reference

### Getting Ready to Simulate

---

The netlist file `another_rc.ckt` below contains two `ahdl_include` statements. The netlist file also contains a quantity definition that specifies an `abstol` of `1e-7` for the quantity `V`, which corresponds to the `Voltage` nature.

**Note:** When you are working in the Cadence analog design environment, each module file must include the `disciplines.vams` file. If you define a nature or discipline more than once and those definitions have different attributes, the simulator reports an error.

In the following example, the simulator processes the `another_res.va` and `another_cap.va` files separately because they are in separate `ahdl_include` statements. Consequently, each file must contain explicit definitions for the `electrical` discipline. To meet this requirement, both the `another_res.va` source file and the `another_cap.va` source file include the `disciplines.vams` file.

Here is the netlist that instantiates the two modules.

```
// netlist file
// file "another_rc.ckt", rc_filter test circuit
//

global gnd
simulator lang=spectre

ahdl_include "another_res.va"
ahdl_include "another_cap.va"

// input voltage to filter
il in gnd vsource type=sine freq=1k

// create the filter using resistor and capacitor
r1 in out another_res r=1k
c1 out gnd another_cap c=1u

// modify the abstol for the Voltage quantity
modifyV quantity name="V" abstol=1e-7

// run transient analysis
tranRsp tran start=0 stop=10m
```

#### File `another_res.va` contains

```
// file "another_res.va", a simple resistor
`include "disciplines.vams"

module another_res(vp, vn);
  inout vp, vn;
  electrical vp, vn;
  parameter real r = 0;

  analog
    V(vp, vn) <+ r*I(vp, vn);
endmodule
```

File `another_cap.va` contains

```
// file "another_cap.va", a simple capacitor
`include "disciplines.vams"

module another_cap(vp, vn);
  inout vp, vn;
  electrical vp, vn;
  parameter real c = 1n;

  analog
    I(vp, vn) <+ c*ddt(V(vp, vn));
endmodule
```

## Using the Compiled C Code Flow

This feature compiles the analog blocks of Verilog-A modules into shared objects for faster simulation. The resulting compiled objects can be saved so that all netlists that use the shared objects simulate faster. The shared objects can also be used by multiple designers so that the benefits of better performance extend beyond the person who compiles the modules. The following sections discuss the directories that are used and the environment variables that control the compiled C code flow.

### Turning the Compiled C Code Flow Off and On

Although using compiled C code is the default behavior of the tool, you can turn it off by either

- Setting the `CDS_AHDL_CMI_ENABLE` environment variable to `NO`.

To resume using compiled C, either unset the `CDS_AHDL_CMI_ENABLE` variable or set the variable to `YES`.

- Setting the `spectre -ahdlcom` option to 0 (zero).

The value 0 gives faster compilation (which, in this release, is achieved by turning off the compiled C code flow) but slower simulation. The value 1 gives slower compilation (because the compiled C code flow is turned on) but faster simulation.

You can use `-ac` as shorthand for the `-ahdlcom` option.

By default, the compiled C code flow is on because the `CDS_AHDL_CMI_ENABLE` variable is unset (with a default value of `YES`) and the `-ahdlcom` option is unset (with a default value of 1). If these defaults do not meet your needs, you can use the information in the following sections to set different values.

## Creating and Specifying Compiled C Code Databases

The compiled C code flow stores the shared objects in a database on disk for the simulation to use. The shared objects are stored in a directory termed the `ahdSimDB` (AHDL simulation database). By default, this database is created in the current working directory and given a name created by appending `.ahdSimDB` to the root of the circuit name. For example, if the circuit name is `top4.sys`, the database name might be `top4.ahdSimDB`.

You can specify an alternative location for the `ahdSimDB` by setting the `CDS_AHDL_CMI_SIMDB_DIR` environment variable to the path of a directory. If the path is writable, the `ahdSimDB` is created there. If the path is not writable or does not exist, an error is reported.

To store compiled objects, you use a second type of database, termed `ahdShipDBs` (AHDL ship databases). To create such databases, you set the `CDS_AHDL_CMI_SHIPDB_COPY` environment variable to `YES`. When you use this setting, an `ahdShipDB` for each Verilog-A file is created in the directory that contains the Verilog-A file, if the directory is writable. If the directory is not writable, no `ahdShipDBs` are created for the modules in the Verilog-A file that is being processed.

If the `CDS_AHDL_CMI_SHIPDB_DIR` environment variable (or the equivalent, but obsolete `CDS_AHDL_CMI_DIR` variable) is also set to a writable path, the `ahdShipDB` database is created there and shared by all the Verilog-A files used for simulations that are run while this environmental variable is set. If the `CDS_AHDL_CMI_SHIPDB_DIR` variable is not set to a writable path or the path does not exist, a warning is reported and `ahdShipDBs` are not created.

While looking for already compiled shared objects, Spectre automatically looks for `ahdShipDBs` in the same location as the Verilog-A files. If `CDS_AHDL_CMI_SHIPDB_DIR` is set to a particular path, Spectre looks in this path for already compiled shared objects.

## Reusing and Sharing Compiled C Objects

When you rerun a netlist in the same directory you used before, the shared objects stored in the `ahdSimDB` are reused automatically.

To minimize the compilation of shared objects when you run different netlists that share the same Verilog-A files, do one of the following:

- Set the `CDS_AHDL_CMI_SHIPDB_COPY` environment variable to `YES`. Shared objects generated by the first simulation are put in the `ahdShipDB` created for each Verilog-A file in the same directory as the Verilog-A file being processed. The shared objects are re-used by subsequent simulations. This approach works if the Verilog-A files are in directories that are writable.



## Cadence Verilog-A Language Reference

### Getting Ready to Simulate

---

- Set the `CDS_AHDL_CMI_SHIPDB_COPY` environment variable to `YES` and set `CDS_AHDL_CMI_SHIPDB_DIR` to a writable directory. This directory becomes the sole `ahdIShipDB`. Shared objects generated by the first simulation are put in this `ahdIShipDB`. The shared objects are re-used by subsequent simulations. This approach works if the Verilog-A files are in directories that are read-only.

To share precompiled objects among different users,

- Run the simulation once with the `CDS_AHDL_CMI_SHIPDB_COPY` variable set to `YES`.

An `ahdIShipDB` is created for each Verilog-A file in the same directory as the Verilog-A file (provided that the directories containing the Verilog-A files are writable). The newly-created `ahdIShipDBs` contain shared objects.

Other users who reference the same Verilog-A files can pick up the shared objects without setting any of the compiled C code environment variables and without needing write access to the directories containing the Verilog-A files.

# **Cadence Verilog-A Language Reference**

## Getting Ready to Simulate

---

---

## Supported and Unsupported Language Elements

---

The Cadence® Verilog®-A language is specified in Annex C of the *Verilog-AMS Language Reference Manual: Analog & Mixed-Signal Extensions to Verilog HDL*, produced by Open Verilog International.

The Cadence implementation of Verilog-A does not support the following elements of the specified Verilog-A language.

- The following two aspects of hierarchy:
  - Ordered parameter lists in hierarchical instantiation
  - Named nodes in hierarchical instantiation
- Hierarchical names, except for `node.potential.abstol` and `node.flow.abstol`, which are supported
- Derived natures
- Using `1'b1` constant specification
- Parameters used to specify ranges for the `generate` statement
- String values used in parameter arrays
- The `defparam` statement
- The `ground` declaration
- Nested use of the `ddt` operator
- Module description attribute
- Environment parameter functions (`$simparam`)
- Hierarchy detection functions (`$param_given`, `$port_connected`)
- Predefined macros (`VAMS_COMPACT_MODELING`)

- Local parameter declarations
- Limiting functions
- Limiting algorithms
- String parameter ranges
- The following four aspects of functions:
  - Arrays passed to functions
  - Nodes passed to functions
  - Access functions used inside functions
  - Accessing variables defined in a function's parent module
- The following aspect of input and output:
  - The `%b` format character
- Vector branches
- Vector arguments for simulator functions
- The concatenation operator
- The derivative operator
- Laplace transforms taking parameter-sized arrays as arguments
- Parameter-sized ports
- Enforcement of input, output, and inout
- The following system tasks
  - `$realtime` scaled to the ``timescale` directive
  - `$stime`
  - `$time`
  - `$monitor` and `$fmonitor`
  - The `%b`, `%o`, and `%h` specifications for `$display`, `$fdisplay`, `$write`, `$fwrite`, `$monitor`, `$fmonitor`, `$strobe`, and `$fstrobe`
  - `$monitor off/on`
  - `$printtimescale`

## Cadence Verilog-A Language Reference

### Supported and Unsupported Language Elements

---

- ❑ `$timeformat`
- ❑ `$bitstoreal`
- ❑ `$itor`
- ❑ `$realtobits`
- ❑ `$rtoi`

`$readmen` used with the `%b`, `%h`, and `%r` specifications.

The items in the next list are deprecated features. The Cadence implementation of Verilog-A supports these features, but might not in the future. These features are no longer supported in the standard specification of the language.

#### Deprecated features

Deprecated feature	To comply with the current standard,...
<code>`ifdef`</code>	Use <code>`ifdef</code> without a trailing tick. For example, instead of  <code>`ifdef`CHECK_BACK_SURFACE</code>  <code>use</code> <code>`ifdef CHECK_BACK_SURFACE</code>
<code>`inf</code> used for specifications other than ranges	Use <code>`inf</code> only to specify ranges.
user-defined analog function	Use <code>analog function</code>
<code>discontinuity</code>	Use <code>\$discontinuity</code> .
<code>I(a,a)</code> to probe a port current	Use <code>I()</code> .
<code>delay</code>	Use <code>absdelay</code> .
Null statements used elsewhere other than in case and event statements	Use null statements (coded as <code>;</code> ) only in case or event control statements.
Chained assignment statements, such as <code>x=y=z</code>	Break the assignment chain into separate assignments, such as <code>y=z; x=y;</code> .
<code>\$limexp</code>	Use <code>limexp</code> .
Using <code>[ ]</code> for literal arrays	Use <code>{ }</code> for literal arrays.
<code>bound_step</code>	<code>\$bound_step</code>

## Cadence Verilog-A Language Reference

### Supported and Unsupported Language Elements

---

#### Deprecated features

---

Deprecated feature	To comply with the current standard,...
<code>export</code> qualifier	Delete the <code>export</code> qualifier, which is redundant.
<code>\$dist_</code> functions in the analog block	Use the corresponding <code>\$rdist_</code> function.
The second argument of the <code>cross</code> operator being a non-integer type	Change the second operator to an integer type.
Using <code>for</code> , <code>while</code> and <code>repeat</code> loop statements for the timer function	Use a <code>genvar</code> loop for the timer function.
Unassigned variables	Assign each variable. Unassigned variables are considered digital variables.
<code>generate</code>	Use a <code>genvar</code> loop instead.
The second argument of the <code>last_crossing</code> operator being a non-integer type	Change the second operator to an integer type.

---

The items in the next list are Cadence extensions. These features are not part of the standard specification of the language.

#### Cadence extensions

---

Feature
Cadence syntax for attributes
<code>mfactor</code> attribute
<code>dynamicparams</code>
Inherited parameters

---

## Updating Verilog-A Modules

The Verilog-A language is a subset of Verilog-AMS, but some of the language elements in that subset have changed since Verilog-A was released by itself. As a consequence, you might need to revise your Verilog-A modules before using them as Verilog-AMS modules. The following table highlights the differences.

Feature	Independent Verilog-A	Verilog-AMS	Change type
Analog time	<code>\$realtime</code>	<code>\$abstime</code>	New
Empty discipline	Predefined as type <code>wire</code>	Type not defined	Default definition
Implicit nodes	<code>'default_nodetype</code> <code>discipline_identifier</code> default: <code>wire</code>	default type: empty discipline, no domain type	Default definition
<code>initial_step</code>	Default = TRAN	Default = ALL	Default definition
<code>final_step</code>	Default = TRAN	Default = ALL	Default definition
<code>\$realtime</code>	<code>\$realtime:</code> <code>timescale = 1 sec</code>	<code>\$realtime:</code> <code>timescale = 'timescale</code> <code>def = 1n. See \$abstime</code>	Definition
Discontinuity function	<code>discontinuity(x)</code>	<code>\$discontinuity(x)</code>	Syntax
Limiting exponential function	<code>\$limexp(expression)</code>	<code>limexp(expression)</code>	Syntax
Port branch access	<code>I(a,a)</code>  <b>Note:</b> Cadence® Verilog-A supports only this form.	<code>I(&lt;a&gt;)</code>  <b>Note:</b> This form is <i>not</i> supported in Cadence Verilog-A.	Syntax

## Cadence Verilog-A Language Reference

### Updating Verilog-A Modules

Feature	Independent Verilog-A	Verilog-AMS	Change type
Timestep control (maximum stepsize)	<code>bound_step(const_expression)</code>	<code>\$bound_step(expr)</code>	syNtax
Continuous waveform delay	<code>delay()</code>	<code>absdelay()</code>	Syntax
User-defined analog functions	Function	Analog function	Syntax
Discipline domain	N/A, assumed continuous	Now continuous (default) and discrete	Extension
Time tolerance on timer functions	N/A	Supports additional time tolerance argument for <code>timer()</code>	Extension
<code>'default_nodetype</code>	<code>'default_nodetype</code>	<code>'default_discipline</code>	Obsolete
Generate statement	<code>generate</code>	<code>genvar</code>	Obsolete
Null statement	<code>;</code>	Limited to <code>case</code> , <code>conditional</code> , and <code>event statements</code>	Obsolete

## Suggestions for Updating Models

The remainder of this appendix describes some of these changes in greater detail and suggests ways of modifying your existing Verilog-A models so that they work in version 4.4.6 of Verilog-A and in version 1.0 of Verilog-AMS. The changes recommended here might not work with 4.4.5 or earlier versions of Verilog-A.

### Current Probes

OVI Verilog-A 1.0 syntax for a current probe is `I(a,a)`. OVI Verilog-AMS 2.0 changes this to `I(<a>)`.

**Suggested change:** Put `I(<a>)` inside an ``ifdef __VAMS_ENABLE__`, which makes the syntax effective only for Verilog-AMS. For example, change

```
iin_val = I(vin,vin);
```



to

```
`ifdef __VAMS_ENABLE__  
    iin_val = I(<vin>);  
`else  
    iin_val = I(vin,vin);  
`endif
```

**Verilog-A warning:** None

## Analog Functions

OVI Verilog-A 1.0 declaration of an analog function is

```
function name;
```

OVI Verilog-AMS 2.0 uses the syntax

```
analog function name;
```

**Suggested change:** Prefix all function declarations by the word `analog`. For example, change

```
function real foo;
```

to

```
analog function real foo;
```

**Verilog-A warning:** None

## NULL Statements

OVI Verilog-A 1.0 allows `NULL` statements to be used anywhere in an analog block. OVI Verilog-AMS 2.0 allows `NULL` statements to be used only after `case` statements or event control statements.

**Suggested change:**

Remove illegal `NULL` statements. For example, change

```
begin  
end;
```

to

```
begin  
end
```

**Verilog-A warning:** None

## **inf Used as a Number**

Spectre Verilog-A allows 'inf to be used as a number. OVI Verilog-AMS 2.0 allows 'inf to be used only on ranges.

### **Suggested change:**

Change all illegal references to 'inf to a large number such as 1M. For example, change;

```
parameter real points_per_cycle = inf from [6:inf];
```

to

```
parameter real points_per_cycle = 1M from [6:inf];
```

**Verilog-A warning:** None

## **Changing Delay to Absdelay**

OVI Verilog-A 1.0 uses `delay` as the analog delay operator but OVI Verilog-AMS 2.0 uses `absdelay`.

**Suggested change:** Change `delay` to `absdelay`.

**Verilog-A warning:** None

## **Changing \$realtime to \$abstime**

OVI Verilog-A 1.0 uses `$realtime` as absolute time but OVI Verilog-AMS 2.0 uses `$abstime`.

**Suggested change:** Change `$realtime` to `$abstime`.

**Verilog-A warning:** Yes

## **Changing bound\_step to \$bound\_step**

OVI Verilog-A 1.0 uses `bound_step` for step bounding but OVI Verilog-AMS 2.0 uses `$bound_step`.

**Suggested change:** Change `bound_step` to `$bound_step`.

**Verilog-A warning:** None

## Changing Array Specifications

OVI Verilog-A 1.0 uses [ ] to specify arrays but OVI Verilog-AMS 2.0 uses { }.

**Suggested change:** Change [ ] to { }. For example, change

```
svcvcs #(.poles([-2*`PI*bw,0])) output_filter
```

to

```
svcvcs #(.poles({-2*`PI*bw,0})) output_filter
```

**Verilog-A warning:** None

## Chained Assignments Made Illegal

Spectre-Verilog-A allows chained assignments, such as `x=y=z`, but OVI Verilog-AMS 2.0 makes this illegal.

**Suggested change:** Break chain assignments into single assignments. For example, change

```
x=y=z;
```

to

```
y = z; x = y;
```

**Verilog-A warning:** None

## Real Argument Not Supported as Direction Argument

Spectre-Verilog-A allows real numbers to be used for the arguments of `@cross` and `last_crossing` but OVI Verilog-AMS 2.0 makes this illegal.

**Suggested change:** Change the real numbers to integers. For example, change

```
@(cross(V(in),1.0) begin
```

to

```
@(cross(V(in),1) begin
```

**Verilog-A warning:** None

## \$limexp Changed to limexp

OVI Verilog-A 1.0 uses `$limexp`, but OVI Verilog-AMS 2.0 uses `limexp`.

**Suggested change:** Change `$limexp` to `limexp`. For example, change

```
I(vp,vn) <+ is * ($limexp(vacross/$vt) - 1);
```

to

```
I(vp,vn) <+ is * (limexp(vacross/$vt) - 1);
```

**Verilog-A warning:** None

### **`if `MACRO is Not Allowed**

Spectre-Verilog-A allows users to type ``if `MACRO`, but OVI Verilog-AMS 2.0, 1.0 and 1364 say this is illegal.

**Suggested change:** Change ``if `MACRO` to ``if MACRO` (Do not use the tick mark for the macro). For example, change

```
`ifdef `CHECK_BACK_SURFACE
```

to

```
`ifdef CHECK_BACK_SURFACE
```

**Verilog-A warning:** None

### **\$warning is Not Allowed**

Spectre-Verilog-A supports `$warning`, but OVI Verilog-AMS 2.0, 1.0 and 1364 do not support this as a standard built-in function.

**Suggested change:** Change `$warning` to `$strobe`.

**Verilog-A warning:** None

### **discontinuity Changed to \$discontinuity**

OVI Verilog-A 1.0 uses `discontinuity`, but OVI Verilog-AMS 2.0 uses `$discontinuity`.

**Suggested change:** Change `discontinuity` to `$discontinuity`.

**Verilog-A warning:** None

---

## Creating ViewInfo for Verilog-A Cellview

---

This appendix describes a SKILL function that you can use to update the CDF information for a Verilog-A cellview. You might need to do this after copying a cellview.

### ahdlUpdateViewInfo

```
ahdlUpdateViewInfo( t_lib [?cell t1_cell [?view t1_view]] )
```

#### Description

Updates cellview CDF information. During the update, `ahdlUpdateViewInfo`: 1) parses the Verilog-A modules that define the specified cellviews; 2) issues any necessary error messages; 3) updates the cellview CDF information.

#### Arguments

<i>t_lib</i>	Name of the library to be updated.
<i>t1_cell</i>	Name or list of names of cells to be updated. If <i>t1_cell</i> is omitted, the function updates every veriloga cellview in the library.
<i>t1_view</i>	Name or list of names of cellviews to be updated. If <i>t1_view</i> is omitted, the function updates every veriloga cellview associated with the specified cell.

#### Example 1

```
ahdlUpdateViewInfo( "myLibrary" )
```

Updates all the veriloga cellviews in a library.

### **Example 2**

```
ahdlUpdateViewInfo("myLibrary" ?cell "res" "cmp" "opamp")
```

Updates three cells in a library.

### **Example 3**

```
ahdlUpdateViewInfo("myLibrary" ?cell "res" ?view "veriloga")
```

Updates one specified cellview.

# Glossary

---

## A

### **analog HDL**

An analog hardware description language for describing analog circuits and functions.

## B

### **behavioral description**

The mathematical mapping of inputs to outputs for a module, including intermediate variables and control flow.

### **behavioral model**

A version of a module with a unique set of parameters designed to model a specific component.

### **block**

A level within the behavioral description of a module, delimited by `begin` and `end`.

### **branch**

A path between two nodes. Each branch has two associated quantities, a potential and a flow, with a reference direction for each.

## C

### **component**

The fundamental unit within a system. A component encapsulates behavior and structure. Modules and models can represent a single component, or a component with many subcomponents.

### **constitutive relationships**

The expressions and statements that relate the outputs, inputs, and parameters of a module. These relationships constitute a behavioral description.

### **continuous context**

The context of statements that appear in the body of an analog block.

**control flow**

The conditional and iterative statements that control the behavior of a module. These statements evaluate variables (counters, flags, and tokens) to control the operation of different sections of a behavioral description.

**child module**

A module instantiated inside the behavioral description of another, “parent” module.

**D**

**declaration**

A definition of the properties of a variable, node, port, parameter, or net.

**discipline**

A user-defined binding of potential and flow natures and other attributes to a net. Disciplines are used to declare analog nets and can also be used as part of the declaration of digital nets.

**dynamic expression**

An expression whose value is derived from the evaluation of a derivative (the `ddt` function). Dynamic expressions define time-dependent module behavior. Some functions cannot operate on dynamic expressions.

**E**

**element**

The fundamental unit within a system, which encapsulates behavior and structure (also known as a *component*).

**F**

**flow**

One of the two fundamental quantities used to simulate the behavior of a system. In electrical systems, flow is current.

**G**

**global declarations**

Declarations of variables and parameters at the beginning of a behavioral description.



**ground**

The reference node, which has a potential of zero.

**instance**

A named occurrence of a component created from a module definition. One module definition can occur in multiple instances.

**instantiation**

The process of creating an instance from a module definition or simulator primitive, and defining the connectivity and parameters of that instance. (Placing an instance in a circuit or system.)

**H**

**hierarchical system**

A system in which the components are also systems.

**K**

**Kirchhoff's Laws**

Physical laws that define the interconnection relationships of nodes, branches, potentials, and flows. Kirchhoff's Laws specify a conservation of flow in and out of a node and a conservation of potential around a loop of branches.

**L**

**level**

One block within a behavioral description, delimited by a pair of matching keywords such as `begin-end`, `discipline-endsdiscipline`.

**leaf component**

A component that has no subcomponents.

**M**

**module**

A definition of the interfaces and behavior of a component.

## **N**

### **nature**

A named collection of attributes consisting of units, tolerances, and access function names.

### **NR method**

Newton-Raphson method. A generalized method for solving systems of nonlinear algebraic equations by breaking them into a series of many small linear operations ideally suited for computer processing.

### **node**

A connection point of two or more branches in a graph. In an electrical system, and equipotential surface can be modeled as a node.

### **nondynamic expression**

An expression whose derivative with respect to time is zero for every point in time.

## **P**

### **parameter**

A variable used to characterize the behavior of an instance of a module. Parameters are defined in the first section of a module, the module interface declarations, and can be specified each time a module is instantiated.

### **parameter declaration**

The statement in a module definition that defines the instance parameters of the module.

### **port**

The physical connection of an expression in an instantiating (parent) module with an expression in an instantiated (child) module. A port of an instantiated module has two nets, the upper connection, which is a net in the instantiating module, and the lower connection, which is a net in the instantiated module.

### **potential**

One of the two fundamental quantities used to simulate the behavior of a system. In electrical systems, potential is voltage.

### **primitive**

A basic component that is defined entirely in terms of behavior, without reference to any other primitives.

**probe**

A branch introduced into a circuit (or system) that does not alter the circuit's behavior, but lets the simulator read the potential or flow at that point.

**R**

**reference direction**

A convention for determining whether the flow through a branch, the potential across a branch, or the flow in or out of a terminal, is positive or negative.

**reference node**

The global node (which has a potential of zero) against which the potentials of all single nodes are measured. In an electrical system, the reference node is ground.

**run-time binding (of sources)**

The conditional introduction and removal of potential and flow sources during a simulation. A potential source can replace a flow source and vice versa.

**S**

**scope**

The current nesting level of a block.

**seed**

A number used to initialize a random number generator, or a string used to initialize a list of automatically generated names, such as for a list of pins.

**signal**

1. A hierarchical collection of nets that, because of port connections, are contiguous.
2. A single valued function of time, such as voltage or current in a transient simulation.

**structural definitions**

Instantiating modules inside other modules through the use of module definitions and declarations to create a hierarchical structure in the module's behavioral description.

**source**

A branch introduced between two nodes to contribute to the potential and flow of those nodes.

**system**

A collection of interconnected components that produces a response when acted upon by a stimulus.

**V**

**Verilog®-A**

A language for the behavioral description of continuous-time systems that uses a syntax similar to digital Verilog.

**Verilog-AMS**

A mixed-signal language for the behavioral description of continuous-time and discrete-time systems that uses a syntax similar to digital Verilog.

# Index

## Symbols

- ! (logical negation) [89](#)
- != (not equal to) [91](#)
- !=(inequality comparison string function) [99](#)
- (binary minus) [91](#)
- (unary minus) [89](#)
- " (double quote character), displaying [166](#)
- \$ (dollar sign), in identifiers [47](#)
- \$abstime function [123](#)
- \$display [169](#)
- \$display task [169](#)
- \$dist\_chi\_square function [136](#)
- \$dist\_erlang function [138](#)
- \$dist\_exponential function [135](#)
- \$dist\_normal function [134](#)
- \$dist\_poisson function [136](#)
- \$dist\_t function [137](#)
- \$dist\_uniform function [133](#)
- \$fclose task [176](#)
- \$fdisplay [175](#)
- \$fdisplay task [175](#)
- \$fopen task [171](#)
- special formatting commands for [172](#)
- \$fstrobe [174](#)
- \$fstrobe task [174](#)
- \$fwrite [175](#)
- \$limexp
  - analog operator [144](#)
  - changed to limexp [499](#)
- \$limit function [121](#)
- \$random simulator function [132](#)
- \$realtime function [123](#)
- \$realtime to \$abstime [498](#)
- \$sscanf string function [100](#)
- \$strobe [166](#)
  - description [166](#), [170](#)
  - example of use [168](#)
- \$warning, not allowed [500](#)
- \$write [169](#)
- % (modulo) [91](#)
- % (percent character), displaying [166](#)
- & (bitwise binary and) [92](#)
- && (logical and) [92](#)
- ( (left parenthesis) [57](#)
- (tab character), displaying [166](#)
- ) (right parenthesis) [57](#)
- \* (multiply) [91](#)
- + (binary plus) [90](#)
- + (unary plus) [89](#)
- .va file extension [478](#)
- / (divide) [91](#)
- /\* (slash, asterisk), as comment marker [46](#)
- // (double slash), as comment marker [46](#)
- /f [504](#)
- < (less than) [91](#)
- <+ (branch contribution operator) [76](#)
- << (shift bits left) [92](#)
- <= (less than or equal) [91](#)
- == (logical equals) [91](#)
- > (greater than) [91](#)
- >= (greater than or equal) [91](#)
- >> (shift bits right) [92](#)
- ? and : (conditional operator) [94](#)
- @ (at-sign) operator [110](#)
- [ (left bracket), using to include end point in range [57](#)
- \ (backslash)
  - continuing macro text with [194](#)
  - displaying [166](#)
  - in escaped names [47](#)
- ] (right bracket), using to include end point in range [57](#)
- ^ (bitwise binary exclusive OR) [92](#)
- ^~ (bitwise binary exclusive NOR) [92](#)
- \_ (underscore), in identifiers [47](#)
- ` (accent grave) [194](#)
- `define compiler directive [194](#)
  - modifying abstol with [484](#)
  - syntax [194](#)
  - tested by `ifdef compiler directive [196](#)
- `if `MACRO, not allowed [500](#)
- `ifdef compiler directive [196](#)
- `include compiler directive [196](#)
- `resetall compiler directive [197](#)
- `timescale compiler directive [197](#)
- `undef compiler directive [196](#)
- | (bitwise binary or) [92](#)
- || (logical or) [92](#)
- ~ (bitwise unary negation) [89](#)
- ~^ (bitwise binary exclusive nor) [92](#)

## A

- A [98](#)
- A [503](#)
- above event [113](#)
- abs function [106](#)
- absolute function [106](#)
- absolute paths [479](#)
- absolute tolerances
  - modifying [483](#)
  - modifying in Cadence analog design environment [485](#)
  - modifying in standalone mode [484](#)
  - used to evaluate convergence [272](#)
- absolute value [376](#)
- absolute value model [376](#)
- abstol
  - modifying in Cadence analog design environment [485](#)
  - modifying in standalone mode [484](#)
- abstol attribute
  - in convergence [272](#)
  - description [64](#)
  - requirements for [65](#)
- abstol in standalone mode
  - modifying [484](#)
- abstol in the Cadence Analog Design Environment
  - modifying [485](#)
- ac\_stim simulator function [130](#)
- accent grave (`), compiler directive designation [194](#)
- access attribute
  - description [64](#)
  - requirements for [65](#)
- access functions
  - name taken from discipline [126](#)
  - syntax [126](#)
  - using in branch contribution statement [77](#)
  - using to obtain values [126](#)
  - using to set values [126](#)
- acos function [107](#)
- acosh function [107](#)
- ADC
  - 8-bit differential nonlinearity measurement [393](#)
  - 8-bit integral nonlinearity measurement [394](#)
  - definition [393](#)
- ADC model
  - 8-bit [420](#)
  - 8-bit (ideal) [421](#)
  - 8-bit differential nonlinearity measurement [393](#)
  - 8-bit integral nonlinearity measurement [394](#)
- Add Block form [205](#)
- adder [377](#)
- adder model [377](#)
  - four numbers [378](#)
  - full [341](#)
  - half [340](#)
- adder, 4 numbers [378](#)
- ahdl variables, saving [240](#)
- ahdl\_include statements
  - format [235](#)
  - syntax [481](#)
- ahdlUpdateViewInfo [501](#)
- ahdlUpdateViewInfo SKILL function [501](#)
- AM demodulator [440](#)
- AM demodulator model [440](#)
- AM modulator [441](#)
- AM modulator model [441](#)
- ammeter (current meter) [395](#)
- ammeter model [395](#)
- amplifier [349](#)
- amplifier model [349](#)
  - current deadband [294](#)
  - deadband differential [353](#)
  - differential [354](#)
  - limiting differential [361](#)
  - logarithmic [362](#)
  - operational [298](#)
  - sample-and-hold (ideal) [426](#)
  - variable gain differential [371](#)
  - voltage deadband [308](#)
  - voltage-controlled variable-gain [309](#)
- analog behavior, defining with control flow [38](#)
- analog blocks
  - format example [38](#)
  - multiple blocks not allowed [38](#)
  - placement [38](#)
- analog components [293](#)
- analog events [109](#) to [115](#)
  - cross [112](#)
  - detecting [110](#)
  - detecting multiple [110](#)
  - final\_step [111](#)
  - initial\_step [111](#)

## Cadence Verilog-A Language Reference

---

- timer [115](#)
- analog functions [497](#)
- analog multiplexer [293](#)
- analog multiplexer model [293](#)
- analog operators [143](#)
  - \$limexp [144](#)
  - not allowed in for loop [82](#)
  - listed [143](#)
  - not allowed in repeat loop [81](#)
  - restrictions on [144](#)
  - using in looping constructs [83](#)
  - not allowed in while loop [82](#)
- analog systems [26](#)
- analog-to-digital converter
  - example [84](#)
  - model, 8-bit [420](#)
  - model, 8-bit (ideal) [421](#)
  - model, 8-bit differential nonlinearity measurement [393](#)
  - model, 8-bit integral nonlinearity measurement [394](#)
- analyses
  - detecting first time step in [111](#)
  - detecting last time step in [111](#)
- analysis function [128](#)
- analysis types [128](#)
- analysis-dependent functions [128](#)
- AND gate [326](#)
- AND gate model [326](#)
- angular velocity [264](#), [265](#)
- arc-cosine function [107](#)
- arc-hyperbolic cosine function [107](#)
- arc-hyperbolic sine function [107](#)
- arc-hyperbolic tangent function [107](#)
- arc-sine function [107](#)
- arc-tangent function [107](#)
- arc-tangent of x/y function [107](#)
- array specifications, changing [499](#)
- arrays
  - arguments represented as [156](#)
  - as parameter values [188](#)
  - assignment operator for [76](#)
  - of integers, declaring [52](#)
  - of parameters [58](#)
  - of reals, declaring [53](#)
- ASCII code, returning from character [96](#)
- asin function [107](#)
- asinh function [107](#)
- assignment operator, procedural [76](#)
- assignment statement [75](#)
- assignment statement, indirect branch [78](#)

- associated reference directions [27](#)
- association order, of operators [88](#)
- atan function [107](#)
- atan2 function [107](#)
- atanh function [107](#)
- atoi function
  - details [100](#)
- atoi operator [96](#)
- atoi string function [100](#)
- atoreal function [96](#)
  - details [101](#)
- atoreal string function [101](#)
- attenuator model [442](#)
- attributes
  - abstol [64](#)
  - access [64](#)
  - accessing [127](#)
  - blowup [65](#)
  - ddt\_nature [64](#)
  - huge [65](#)
  - idt\_nature [64](#)
  - no\_rigid\_switch\_branch [279](#)
  - requirements [65](#)
  - units [64](#)
  - user-defined [64](#)
  - using to define base nature [64](#)
- audio source [443](#)
- audio source model [443](#)

## B

- B [503](#)
- backward compatibility [473](#)
- base natures
  - declaring [64](#)
  - description [63](#)
- basic components [310](#)
- behavioral characteristics, defining with
  - internal nodes [42](#)
- behavioral description, definition [503](#)
- behavioral model, definition [503](#)
- bidirectional ports [35](#)
- binary operators [90](#)
- binding, run-time, definition [507](#)
- bit error rate calculator model [444](#)
- bitwise operators [93](#)
  - AND [93](#)
  - exclusive NOR [93](#)
  - exclusive OR [93](#)
  - inclusive OR [93](#)

## Cadence Verilog-A Language Reference

---

- unary negation [94](#)
- blanks, as white space [46](#)
- block comment [46](#)
- blocks
  - adding pins to [206](#)
  - adding to schematic [205](#), [206](#)
  - analog [38](#)
  - creating Verilog-A cellviews from [206](#)
  - definition [503](#)
  - freeform [206](#)
  - setting shape of [206](#)
  - using [205](#)
- blowup attribute, description [65](#)
- bound\_step simulator function [121](#)
- bound\_step to \$bound\_step [498](#)
- braces, meaning of in syntax [21](#)
- brackets ( [ ] ) [57](#)
- branch contribution statement
  - compared with procedural assignment statement [77](#)
  - cumulative effect of [77](#)
  - evaluation of [77](#)
  - incompatible with indirect branch assignment [79](#)
  - syntax [76](#)
- branch data type [72](#)
- branch terminals [73](#)
- branches
  - declaring [72](#)
  - definition [503](#)
  - flow, default value for [277](#)
  - port [275](#)
  - reference directions for [27](#)
  - switch, creating [78](#)
  - switch, defined [277](#)
  - switch, equivalent circuit model for [277](#)
  - values associated with [27](#)
- built-in primitives [270](#)
- buses [70](#), [205](#)
  - supported by Verilog-A modules [205](#)

## C

- c or C format character [167](#)
- Cadence analog design environment
  - creating Verilog-A cellviews with [202](#)
  - netlister [235](#)
  - using multiple cellviews in [216](#)
- Cadence analog design environment
  - Simulation window [240](#)

- capacitor model [311](#)
  - untrimmed [305](#)
- car
  - frame model [257](#)
  - on bumpy road, netlist for [262](#)
  - system model [261](#)
- case construct [80](#)
- case statement [80](#)
- CDF parameter of view cyclic field [220](#)
- CDF, definition [292](#)
- CDS\_VLOGA\_INCLUDE environment variable [480](#)
- cell bindings table [231](#)
- Cellview From Cellview form [213](#)
  - using to create Verilog-A cellviews [207](#), [218](#)
- cellviews
  - associating with instances [222](#), [231](#)
  - using Cadence analog design environment to create [202](#)
  - changing default parameters of, example [230](#)
  - creating by using the Cadence analog design environment [202](#)
  - creating with Verilog-A editor [210](#)
  - deleting parameters from [221](#)
  - examining with Descend Edit [209](#)
  - names for [217](#)
  - overriding parameter defaults of [218](#)
  - switching [221](#)
    - example of [225](#)
  - type of, determined by tool [217](#)
- Cellviews Need Saving form [224](#)
- chained assignments made illegal [499](#)
- channel\_descriptor, returned by \$fopen [171](#)
- characters
  - finding first instance in a string [102](#)
  - finding last instance in a string [103](#)
- charge meter model [406](#)
- charge pump model [445](#)
- child modules
  - definition [504](#)
  - instantiating [234](#), [235](#)
- chi-square distribution function [136](#)
- circuit fault model
  - open [297](#)
  - short [300](#)
- circular integrator operator
  - example [148](#)
  - using [147](#)



## Cadence Verilog-A Language Reference

---

- clamp model
  - hard current [295](#)
  - hard voltage [296](#)
  - soft current [301](#)
  - soft voltage [302](#)
- clocked JK flip-flop model [334](#)
- closing a file [176](#)
- code generator model
  - 2-bit [446](#)
  - 4-bit [447](#)
- comments [46](#)
  - in modules [46](#)
  - in text macros [194](#)
- comparator [350](#)
  - example [152](#)
  - model [350](#)
- comparison operator
  - details [99](#)
- comparison operators, for strings [96](#), [99](#)
- compatibility
  - of disciplines [67](#)
  - node connection requirements [185](#)
  - of disciplines [67](#)
- compensator model
  - lag [319](#)
  - lead [320](#)
  - lead-lag [321](#)
- compilation, conditional [196](#)
- compiler directives
  - ``define` [194](#)
  - ``ifdef` [196](#)
  - ``include` [196](#), [197](#)
  - ``resetall` [197](#)
  - ``timescale` [197](#)
  - ``undef` [196](#)
  - designated by accent grave ( ` ) [194](#)
  - list of [194](#)
  - resetting to default values [197](#)
  - using [194](#)
- compiling code conditionally [196](#)
- components
  - creating multiple cellviews for [217](#)
  - definition [503](#)
- concatenation operator [99](#)
  - details [99](#)
- concatenation operator, for strings [96](#)
- conditional compilation [196](#)
- conditional operator [94](#)
- conditional statement [80](#)
- configuration
  - needed for multiple cellviews [219](#)
  - opening in Cadence analog design environment [219](#), [225](#)
- connecting instances
  - example [184](#)
  - rules for [185](#)
- connecting the ports of module
  - instances [184](#)
- conservative discipline [67](#)
- conservative systems [27](#)
  - conservative disciplines used to define [72](#)
  - defined [27](#)
  - values associated with [27](#)
- constant expression [88](#)
- constant power sink model [299](#)
- constants
  - integer [48](#)
  - real [48](#)
  - standard [289](#)
  - string, used as parameters [189](#)
- constants.vams file [288](#)
  - contents of [283](#)
  - location of [479](#), [480](#)
  - role in simulation [479](#)
- constitutive equations [266](#)
- constitutive relationships
  - definition [270](#), [503](#)
  - use in nodal analysis [271](#)
- constructs
  - case [80](#)
  - looping [83](#)
  - procedural control [75](#)
- contribution statements, format [38](#), [76](#)
- control components [318](#)
- control flow
  - definition [504](#)
  - describing behavior with [38](#)
- controlled integrator model [351](#)
- controlled sources [276](#)
- controller model
  - proportional [322](#)
  - proportional derivative [323](#)
  - proportional integral [324](#)
  - proportional integral derivative [325](#)
- conventions, typographical [20](#)
- convergence [271](#)
- conversion specifications [167](#)
- converting real numbers to integers [53](#)
- copy operator, for strings [96](#)
- core model, magnetic [372](#)
- cos function [107](#)

[cosh function 107](#)  
[cosine function 107](#)  
[Create New File form 210](#)  
[cross event 112](#)  
[cross function](#)  
     [syntax 112](#)  
[cube model 379](#)  
[cubic root model 380](#)  
[current analysis type, determining 128](#)  
[current clamp model](#)  
     [hard 295](#)  
     [soft 301](#)  
[current deadband amplifier model 294](#)  
[current meter model 395](#)  
[current probes 496](#)  
[current source model](#)  
     [current-controlled 316](#)  
     [voltage-controlled 315](#)  
[current-controlled current source 277, 316](#)  
[current-controlled current source](#)  
     [model 316](#)  
[current-controlled voltage source 277, 314](#)  
[current-controlled voltage source](#)  
     [model 314](#)

## D

[d or D format character 167](#)  
[DAC model](#)  
     [8-bit 423](#)  
     [8-bit \(ideal\) 424](#)  
     [8-bit differential nonlinearity](#)  
         [measurement 396](#)  
     [8-bit integral nonlinearity](#)  
         [measurement 397](#)  
[DAC, definition 396](#)  
[damper model 414](#)  
[data types](#)  
     [branch 72](#)  
     [discipline 66](#)  
     [integer number 52](#)  
     [nature 63](#)  
     [parameter 54](#)  
     [real number 52](#)  
[DC analysis](#)  
     [value returned by idt during 146](#)  
[DC motor model 346](#)  
[ddt operator \(time derivative\) 40, 144](#)  
[ddt\\_nature attribute](#)  
     [description 64](#)

[requirements for 65](#)  
[deadband amplifier model](#)  
     [current 294](#)  
     [voltage 308](#)  
[deadband differential amplifier model 353](#)  
[deadband model 352](#)  
[decider model 448](#)  
[decimal logarithm function 106](#)  
[decimator model 422](#)  
[declarations](#)  
     [definition 504](#)  
     [global, definition 504](#)  
[.def filename extension 291](#)  
[default values, required for parameters 56](#)  
[`define compiler directive](#)  
     [modifying abstol with 484](#)  
     [syntax 194](#)  
[delay operator 150](#)  
[delay to absdelay 498](#)  
[delaying continuously valued](#)  
     [waveform 150](#)  
[deleting parameters from a veriloga or ahdl](#)  
     [Cellview 221](#)  
[delta probe model 398](#)  
[demodulator model](#)  
     [8-bit PCM 456](#)  
     [AM 440](#)  
     [FM 451](#)  
     [PM 460](#)  
     [QAM 16-ary 462](#)  
     [QPSK 465](#)  
[derivative controller model](#)  
     [proportional 323](#)  
     [proportional integral 325](#)  
[derivative, time 144](#)  
[derived nature 63](#)  
[descend dialog 226](#)  
[descend edit 209](#)  
[descend edit command 209](#)  
[describing a system 25](#)  
[description attribute](#)  
     [for integers 52](#)  
     [for net disciplines 70](#)  
     [for parameter declarations 55](#)  
     [for reals 53](#)  
[differential amplifier \(opamp\) 354](#)  
[differential amplifier model 354](#)  
     [deadband 353](#)  
     [limiting 361](#)  
     [variable gain 371](#)  
[differential signal driver 355](#)

## Cadence Verilog-A Language Reference

---

- differential signal driver model [355](#)
  - differentiator model [356](#)
  - digital phase locked loop model [449](#)
  - digital to analog converter example [155](#)
  - digital voltage controlled oscillator model [450](#)
  - digital-to-analog converter model
    - 8-bit [423](#)
    - 8-bit (ideal) [424](#)
    - 8-bit differential nonlinearity measurement [396](#)
    - 8-bit integral nonlinearity measurement [397](#)
  - diode model [432](#)
    - Schottky [439](#)
  - direction of ports, declaring [35](#)
  - directions, reference [507](#)
  - directives. See compiler directives
  - disciplines [66](#)
    - compatibility of [67](#) to [70](#)
    - conservative [67](#)
    - declaring [66](#)
    - definition [504](#)
    - empty [67](#)
    - empty, declaring terminals with [71](#)
    - scope of [66](#)
    - signal-flow [67](#)
  - disciplines.vams file [284](#)
    - contents of [283](#)
    - location of [479](#), [480](#)
    - required in Cadence analog design environment [486](#)
    - role in simulation [478](#)
  - discontinuities
    - announcing [119](#)
    - in switch branches [278](#)
  - discontinuity function
    - changed to \$discontinuity [500](#)
    - not required for switch branches [278](#)
    - syntax [119](#)
  - discrete-time finite difference approximation [271](#)
  - \$display task [169](#)
  - displaying
    - information [165](#)
    - results [165](#)
    - waveforms of variables [240](#)
  - \$dist\_chi\_square function [136](#)
  - \$dist\_erlang function [138](#)
  - \$dist\_exponential function [135](#)
  - \$dist\_normal function [134](#)
  - \$dist\_poisson function [136](#)
  - \$dist\_t function [137](#)
  - \$dist\_uniform function [133](#)
  - distributions
    - chi-square [136](#)
    - Erlang [138](#)
    - exponential [135](#)
    - gaussian [135](#)
    - normal [134](#)
    - Poisson [136](#)
    - Student's T [137](#)
    - uniform [133](#)
  - divider model [381](#)
  - DNL, definition [393](#)
  - dollar signs, in identifiers [47](#)
  - domain
    - of hyperbolic functions [107](#)
    - of mathematical functions [106](#)
    - of trigonometric functions [107](#)
  - driver model
    - differential signal [355](#)
  - D-type flip-flop model [333](#)
  - dynamic expression, definition [504](#)
- ## E
- E [504](#)
  - e or E format character [167](#)
  - Edit Object Properties form [227](#)
  - 8-bit parallel register model [344](#)
  - 8-bit serial register model [345](#)
  - electrical modeling [243](#)
  - electromagnetic components [346](#)
  - electromagnetic relay [347](#)
  - electromagnetic relay model [347](#)
  - element, definition [504](#)
  - else statement, matching with if statement [80](#)
  - empty disciplines
    - compatibility of [68](#)
    - definition [67](#)
    - example [67](#)
    - predefined (wire) [67](#)
  - endmodule keyword [32](#)
  - entering interactive Tcl mode [177](#)
  - enumerated values, as parameter values [189](#)
  - environment functions [123](#)
  - environment variables
    - CDS\_VLOGA\_INCLUDE [480](#)

## Cadence Verilog-A Language Reference

---

equality comparison string function (==) [99](#)  
Erlang distribution [138](#)  
Erlang distribution function [138](#)  
error calculation block [318](#)  
error calculation block model [318](#)  
error messages, forms of [475](#)  
escaped names [47](#)  
    defined [47](#)  
    in Cadence analog design environment [214](#)  
    Spectre [47](#)  
    using in the Cadence analog design environment [214](#)  
    using keywords as [471](#)  
event OR operator [110](#)  
events  
    detecting analog [110](#)  
    detecting and using [110](#)  
events, analog [109](#) to [115](#)  
examples  
    \$strobe formatting [168](#)  
    analog-to-digital converter [84](#)  
    car [262](#)  
    gearbox [266](#)  
    ideal relay [278](#)  
    ideal sampled data integrator [164](#)  
    inductor [40](#)  
    limiter [258](#)  
    linear damper [257](#)  
    motor [248](#)  
    rectifier [243](#)  
    RLC circuit [42](#)  
    road [258](#)  
    shock absorber [257](#)  
    sources and probes [280](#)  
    spring [256](#)  
    thin-film transistor [249](#)  
    thyristors [245](#)  
    transformer [246](#)  
    voltage deadband amplifier [39](#)  
    wheel [260](#)  
exclude keyword [57](#)  
exiting to the operating system [176](#)  
exp function [106](#)  
exponential distribution function [135](#)  
exponential function [106](#)  
exponential function model [382](#)  
exponential function, limited [144](#)  
expressions  
    constant [88](#)  
    definition [88](#)

dynamic, definition [504](#)  
short circuiting of [95](#)

## F

F [504](#)  
f or F format character [167](#)  
fault model  
    open circuit [297](#)  
    short circuit [300](#)  
\$fclose task [176](#)  
\$fdisplay task [175](#)  
file extension .va [478](#)  
files  
    closing [176](#)  
    including at compilation time [196](#)  
    opening [171](#)  
    writing to [174](#)  
files, working with [171](#)  
filters  
    slew [154](#)  
    transition [151](#)  
final\_step event [111](#)  
find event probe [399](#)  
find event probe model [399](#)  
find slope [401](#)  
find slope model [401](#)  
finite-difference approximation [271](#)  
flicker\_noise function [131](#)  
flicker\_noise simulator function [131](#)  
flip-flop model  
    clocked JK [334](#)  
    D-type [333](#)  
    JK-type [336](#)  
    RS-type [338](#)  
    toggle-type [339](#)  
    trigger-type [339](#)  
flow  
    default value for [277](#)  
    definition [504](#)  
    in a conservative system [27](#)  
    probes, definition [274](#)  
    probes, in port branches [275](#)  
    sources, definition [275](#)  
    sources, equivalent circuit model for [276](#)  
    sources, switching to potential sources [277](#)  
flow law. See Kirchhoff's Laws, Flow Law  
flow-to-value converter model [357](#)

- FM demodulator [451](#)
- FM demodulator model [451](#)
- FM modulator model [452](#)
- \$fopen task [171](#)
- for loop statement [82](#)
- for statement [82](#)
- formatting output [167](#)
- forms
  - Add Block [205](#)
  - Cellview From Cellview [207](#), [213](#), [218](#)
  - Cellviews Need Saving [224](#)
  - Create New File [210](#)
  - Edit Object Properties [227](#)
  - New Library [203](#)
  - Open Configuration or Top Cellview [219](#)
  - Simulation Environment Options [238](#)
  - Symbol Generation [212](#)
  - Technology File for New Library [204](#)
- four-number adder model [378](#)
- four-number subtractor model [392](#)
- freeform block shape [206](#)
- frequency meter model [402](#)
- frequency-phase detector model [453](#)
- \$fstrobe task [174](#)
- full adder model [341](#)
- full subtractor model [343](#)
- full wave rectifier model, two phase [429](#)
- functional blocks [349](#)
- functions
  - access [126](#)
  - defining [177](#)
  - environment [123](#)
  - mathematical [105](#)
  - string [95](#), [96](#)
  - user-defined [177](#)

## G

- G [504](#)
- g or G format character [167](#)
- gain block [182](#)
- gap model, magnetic [373](#)
- gate pulses, used to control thyristors [245](#)
- gaussian distribution [135](#)
- gearbox
  - behavioral description for [266](#)
  - model [263](#)
  - netlist for [267](#)
- gearbox model [413](#)

- generate statement [83](#)
- generating random numbers [132](#)
- generating random numbers in specified distributions [133](#)
- genvars [62](#)
- getc function [96](#)
- getc string function [101](#)
- global declarations, definition [504](#)
- ground nodes
  - as assumed branch terminal [73](#)
  - compatibility of [185](#)
  - potential of [27](#)

## H

- H [505](#)
- h or H format character [167](#)
- half adder model [340](#)
- half subtractor model [342](#)
- half wave rectifier model, two phase [430](#)
- hard current clamp model [295](#)
- hard voltage clamp model [296](#)
- HDLdebug debugger [19](#)
- hierarchical module instantiation [235](#)
- hierarchical name, displaying [166](#)
- hierarchical Verilog-A modules [235](#)
- Hierarchy Editor
  - synchronizing with schematic [224](#)
  - window [221](#)
- hierarchy, using [237](#)
- higher order systems [42](#)
- huge attribute, description [65](#)
- hyperbolic cosine function [107](#)
- hyperbolic functions [106](#)
- hyperbolic sine function [107](#)
- hyperbolic tangent function [107](#)
- hypot function [107](#)
- hypotenuse function [107](#)
- hysteresis model, rectangular [358](#)

## I

- IC analysis, value returned by idt during [146](#)
- ideal relay example [278](#)
- ideal sampled data integrator example [164](#)
- identifiers [46](#)
- idt operator
  - example [41](#)

- using in feedback configuration [146](#)
- idt\_nature attribute
  - description [64](#)
  - requirements for [65](#)
- idtmod operator
  - example [148](#)
  - using [147](#)
- `ifdef compiler directive [196](#)
- ignored code, restrictions on [196](#)
- impedance meter model [412](#)
- implicit branches [73](#)
- implicit models [281](#)
- include Compiler Directive [478](#)
- `include compiler directive [196](#)
- including files
  - at compilation time [196](#)
  - in a netlist [481](#)
- including Verilog-A through model setup [235](#)
- indirect branch assignment statement [78](#)
- inductor model [312](#)
  - module describing [40](#)
  - untrimmed [306](#)
- inequality comparison string function ( $\neq$ ) [99](#)
- inertia [265](#)
- inf (negative infinity) [57](#)
- inf used as a number [498](#)
- infinity, indicating in a range [57](#)
- inh\_conn\_def\_value attribute [189](#)
- inh\_conn\_prop\_name attribute [189](#)
- inherited connections, attributes for [189](#)
- inherited parameters, attribute for [55](#)
- inherited ports, using [189](#)
- inherited\_mfactor attribute [191](#)
- initial\_step event [111](#)
  - example of use [258](#)
  - syntax [111](#)
- instance parameters, modifying [230](#)
- instances
  - associating cellviews with [222](#)
  - connecting with ports [184](#)
  - creating [182](#)
  - creating and naming [182](#)
  - definition [505](#)
  - examining Verilog-A modules bound to [226](#)
  - labels for, in Cadence analog design environment [206](#)
  - overriding parameter values in [185](#)
- instantiating

- analog primitives [186](#)
- analog primitives that use array valued parameters [188](#)
- module description files in netlists [480](#)
- modules that use unsupported parameter types [189](#)
- modules with netlists [43](#)
- Verilog-A modules [182](#)
- instantiation
  - definition [505](#)
  - hierarchical [480](#)
  - of non-Verilog-A modules [189](#)
  - statement. See module instantiation statement example
  - syntax [182](#)
- integer
  - attributes for [52](#), [191](#), [279](#)
  - constants [48](#)
  - data type [52](#)
  - declaring [52](#)
  - numbers [48](#), [52](#)
  - range allowed in Verilog-A [52](#)
- integral controller model, proportional [324](#)
- integral derivative controller model, proportional [325](#)
- integral, time [145](#)
- integration and differentiation with analog signal, using [40](#)
- integrator [359](#)
- integrator model [359](#)
  - controlled [351](#)
  - saturating [366](#)
  - switched capacitor [428](#)
- interconnection relationships [270](#)
- interface declarations, example [33](#)
- internal nodes
  - for higher order derivatives [40](#)
  - in higher order systems [42](#)
  - use [41](#)
- internal nodes in behavioral definitions, using [41](#)
- internal nodes in higher order system, using [42](#)
- internal nodes in modules, using [41](#)
- internet mail address [19](#)
- interpolating with table models [139](#)

## J

- JK-type flip-flop model [336](#)

## K

keywords, list of [471](#)  
 Kirchhoff's Laws [270](#)  
   definition [505](#)  
   Flow Law [27](#), [270](#), [271](#), [272](#)  
   illustrated [270](#)  
   use in nodal analysis [271](#)  
   Potential Law [27](#), [270](#)

## L

L [505](#)  
 lag compensator model [319](#)  
 Laplace transforms  
   numerator-denominator form [159](#)  
   numerator-pole form [158](#)  
   s-domain filters [156](#)  
   zero-denominator form [157](#)  
   zero-pole form [157](#)  
 laplace\_nd Laplace transform [159](#)  
 laplace\_np Laplace transform [158](#)  
 laplace\_zd Laplace transform [157](#)  
 laplace\_zp Laplace transform [157](#)  
 last\_crossing simulator function  
   improving accuracy of [122](#)  
   setting direction for [112](#), [122](#)  
   syntax [122](#)  
 laws, Kirchhoff's. See Kirchhoff's Laws  
 lead compensator model [320](#)  
 lead-lag compensator model [321](#)  
 left justifying output [167](#)  
 len function [96](#)  
 len string function [101](#)  
 level shifter model [337](#), [360](#)  
 level, definition [505](#)  
 libraries  
   creating [202](#)  
 \$limexp analog operator [144](#)  
 limited exponential function [144](#)  
 limiter model [258](#)  
 limiting differential amplifier model [361](#)  
 linear conductor model [280](#)  
 linear damper model [257](#)  
 linear resistor model [281](#)  
 ln function [106](#)  
 local parameters  
   declaring [59](#)  
 log function [106](#)

logarithm function  
   decimal [106](#)  
   natural [106](#)  
 logarithmic amplifier model [362](#)  
 logic components [326](#)  
 logic table [336](#), [338](#), [339](#)  
 lowercase characters, required for SPICE-  
   mode netlisting [483](#)  
 LPF, definition [449](#)

## M

M [505](#)  
 .m suffix, required for models [240](#)  
 M\_1\_PI constant [289](#)  
 M\_2\_PI constant [289](#)  
 M\_2\_SQRTPI constant [289](#)  
 M\_E constant [289](#)  
 M\_LN10 constant [289](#)  
 M\_LN2 constant [289](#)  
 M\_LOG10E constant [289](#)  
 M\_LOG2E constant [289](#)  
 M\_PI constant [289](#)  
 M\_PI\_2 constant [289](#)  
 M\_PI\_4 constant [289](#)  
 M\_SQRT1\_2 constant [289](#)  
 M\_SQRT2 constant [289](#)  
 M\_TWO\_PI constant [289](#)  
 macros. See text macros  
 magnetic components [372](#)  
 magnetic core [372](#)  
 magnetic core model [372](#)  
 magnetic gap [373](#)  
 magnetic gap model [373](#)  
 magnetic winding [374](#)  
 magnetic winding model [374](#)  
 mapping instance ports to module  
   ports [183](#)  
 mapping ports with ordered lists [183](#)  
 mass model [415](#)  
 math domain errors, controlling [107](#)  
 mathematical components [376](#)  
 mathematical functions [106](#)  
 maximum (max) function [106](#)  
 measure components [393](#)  
 measurement model  
   offset [403](#)  
   slew rate [403](#), [408](#)  
 mechanical damper [414](#)  
 mechanical damper model [414](#)

- mechanical mass [415](#)
- mechanical mass model [415](#)
- mechanical modeling [255](#)
- mechanical restrainer [416](#)
- mechanical restrainer model [416](#)
- mechanical spring [418](#)
- mechanical spring model [418](#)
- mechanical systems [413](#)
- messages, error [475](#)
- m-factor (multiplicity factor)
  - accessing inherited [191](#)
  - attributes for [191](#)
  - example of using [191](#)
  - using [190](#)
- minimum (min) function [106](#)
- mixed conservative and signal-flow systems [27](#)
- mixed-signal components [420](#)
- mixer [454](#)
- mixer model [453](#), [454](#)
- model file [240](#)
- modeling [245](#)
- models
  - in modules [239](#)
  - library of samples [291](#)
  - using in a Verilog-A module [239](#)
  - using with a Verilog-A [239](#)
- modulator model
  - 8-bit PCM [457](#)
  - AM [441](#)
  - FM [452](#)
  - PM [461](#)
  - QPSK [466](#)
  - quadrature amplitude 16-ary [464](#)
- module keyword [32](#)
- modules
  - analog behavior of
    - defining [37](#)
  - behavioral description [37](#)
  - capacitor example [40](#)
  - child, definition [504](#)
  - declaring [32](#)
  - definition [32](#), [505](#)
  - format [32](#)
  - format example [32](#)
  - hierarchy of [181](#)
  - instantiating in other modules [182](#)
  - instantiation statement, example [183](#), [184](#)
  - interface declarations [33](#)
  - interface, declaring [33](#)

- internal nodes in [41](#)
- name [34](#)
- netlist instantiation of [43](#)
- using nodes in [71](#)
- non-Verilog-A [189](#)
- overview [32](#)
- RLC circuit example [42](#)
- top-level [181](#)
- transformer example [182](#)
- voltage deadband amplifier example [39](#)
- MOS thin-film transistor [435](#)
- MOS thin-film transistor model [435](#)
- MOS transistor (level 1) [433](#)
- MOS transistor model (level 1) [433](#)
- motor model
  - behavioral description for [248](#)
  - DC [346](#)
  - three-phase [348](#)
- multilevel hierarchical designs [234](#)
- multiple cellviews, using for instances [216](#)
- multiplexer model [363](#)
- multiplier model [383](#)

## N

- N [506](#)
- N JFET transistor model [436](#)
- named branches [72](#)
- names, escaped [47](#)
- naming requirements for SPICE-mode
  - netlisting [483](#)
- NAND Gate [327](#)
- NAND gate model [327](#)
- natural log function model [384](#)
- natural logarithm function [106](#)
- natures [63](#)
  - access function for [64](#)
  - attributes [64](#)
  - base, declaring [64](#)
  - base, definition [63](#)
  - binding with potential and flow [66](#)
  - declaring [63](#)
  - definition [506](#)
  - deriving from other natures [63](#)
  - requirements for [63](#)
- net disciplines [70](#)
  - description attribute for [70](#)
- netlisting Verilog-A modules [235](#)
- netlists
  - creating [480](#)



- example using cellviews [228](#)
- including files in [481](#)
- including Verilog-A modules in [235](#)
- instantiating module description files in [43](#)
- n-channel TFT device [254](#)
- preparing to display waveforms [240](#)
- typographic conventions used for [21](#)
- VCO2 example [237](#)
- New Library form [203](#)
- new-line characters
  - as white space [46](#)
  - displaying [166](#)
- Newton-Raphson method
  - definition [506](#)
  - used to evaluate systems [271](#)
- no\_rigid\_switch\_branch attribute [279](#)
- nodal analysis [271](#)
- node data type [70](#)
- nodes [26](#)
  - assumed to be infinitely small [270](#)
  - connecting instances with [184](#)
  - declaring [70](#)
  - definition [506](#)
  - matching sizes required when connected [185](#)
  - as module ports [71](#)
  - reference, definition [507](#)
  - reference, potential of [27](#)
  - scalar [70](#)
  - values associated with [27](#)
  - vector, declaring [70](#)
  - vector, definition [70](#)
  - ways of using [71](#)
- noise functions
  - flicker\_noise [131](#)
  - noise\_table [131](#)
- noise source model [455](#)
- noise\_table function [131](#)
- noise\_table simulator function [131](#)
- nonlinearities, announcing and handling [121](#)
- NOR Gate [330](#)
- NOR gate model [330](#)
- normal (gaussian) distribution [134](#)
- normal distribution function [134](#)
- NOT Gate [329](#)
- NOT gate model [329](#)
- NPN bipolar junction transistor model [437](#)
- NR method, definition [506](#)
- NULL statements [497](#)

- numbers [48](#)
- numerator-denominator Laplace transforms [159](#)
- numerator-denominator Z-transforms [164](#)
- numerator-pole Laplace transforms [158](#)
- numerator-pole Z-transforms [163](#)

## O

- o or O format character [167](#)
- offset measurement [403](#)
- offset measurement model [403](#)
- one-line comment [46](#)
- opamp model [298](#), [354](#)
- open circuit fault [297](#)
- open circuit fault model [297](#)
- Open Configuration or Top Cellview form [219](#)
- opening
  - design [225](#)
  - file [171](#)
- opening a configuration and associated schematic [219](#)
- operation [244](#)
- operational amplifier model [298](#)
- operators [87](#) to [94](#)
  - analog [143](#)
  - association of [88](#)
  - binary [90](#)
  - bitwise [93](#)
  - circular integrator [147](#)
  - delay [150](#)
  - idtmmod [147](#)
  - precedence [95](#)
  - precedence of [88](#), [95](#)
  - string [95](#)
  - ternary [94](#)
  - time derivative [144](#)
  - time integral [145](#)
  - unary [89](#)
- or (event OR) [92](#)
- OR Gate [328](#)
- OR gate model [328](#)
- OR operator, event [110](#)
- order of evaluation, changing [88](#)
- ordered lists, mapping nodes with [183](#)
- ordinary identifiers [47](#)
- oscillator model
  - digital voltage controlled [450](#)
  - voltage-controlled [469](#)

- overriding parameter values [185](#)
  - by name [186](#)
  - from the instantiation statement [185](#)
  - in instances [185](#)
- overview
  - analog events [109](#)
  - modules [32](#)
  - operators [88](#)
  - system simulation [24](#)
- overview of probes and sources [274](#)

## P

- P [506](#)
- P\_C constant [289](#)
- P\_CELSIUS0 constant [289](#)
- P\_EPS0 constant [289](#)
- P\_H constant [289](#)
- P\_K constant [289](#)
- P\_Q constant [289](#)
- P\_U0 constant [289](#)
- parallel register model, 8-bit [344](#)
- parallel register, 8-bit [344](#)
- parameters [36](#), [54](#)
  - aliases [59](#)
  - array values as [188](#)
  - arrays of [58](#)
  - attributes for [55](#)
  - changing during compilation [55](#)
  - changing of cellview bound with an instance [219](#)
  - changing of cellview not currently bound with an instance [220](#)
  - changing value of when bound with an instance [219](#)
  - changing value of when not bound with an instance [220](#)
  - must be constants [54](#)
  - declaration, definition [506](#)
  - declaring [54](#)
  - default value required [56](#)
  - defaults, overriding with Edit Object Properties form [218](#)
  - definition [506](#)
  - deleting from cellviews [221](#)
  - dependence on other parameters [55](#)
  - enumerated values as [189](#)
  - examining current values of [226](#)
  - inherited [55](#)
  - names [36](#)
  - not displayed in Edit Object Properties form unless overridden [227](#)
  - overrides
    - detecting [125](#)
  - overriding values with module instantiation statement [185](#)
  - permissible values for, specifying [56](#)
  - specified in modules, modifying [218](#)
  - string [59](#)
  - string values as [189](#)
  - type specifier optional [56](#)
  - type, specifying [56](#)
- parentheses
  - changing evaluation order with [88](#)
  - using to exclude end point in range [57](#)
- parsing, errors during [208](#)
- paths
  - absolute [479](#)
  - relative [479](#)
  - specifying with CDS\_VLOGA\_INCLUDE environment variable [480](#)
- PCM demodulator model, 8-bit [456](#)
- PCM demodulator, 8-bit [456](#)
- PCM modulator model, 8-bit [457](#)
- PCM modulator, 8-bit [457](#)
- period of signal, example of
  - calculating [123](#)
- permissible values for parameters, specifying [56](#)
- permissible values, specifying [56](#)
- phase detector
  - model [458](#)
- phase locked loop model [459](#)
  - digital [449](#)
- pin direction [205](#)
- pins
  - adding to blocks [206](#)
  - deleting [206](#)
  - direction of, in symbols [205](#)
  - specifying information for [212](#)
  - specifying name seed for [205](#)
- PLL model [459](#)
  - digital [449](#)
- PLL, definition [451](#)
- plotting variables [240](#)
- PM demodulator [460](#)
- PM demodulator model [460](#)
- PM modulator [461](#)
- PM modulator model [461](#)
- Poisson distribution [136](#)
- Poisson distribution function [136](#)

- polynomial [385](#)
- polynomial model [385](#)
- port branches [275](#)
  - contrasted with simple port [275](#)
  - monitoring flow with [275](#)
- port bus, defining [71](#)
- port connection rules [185](#)
- port declaration example [36](#)
- port direction [35](#)
- port type [35](#)
- ports [34](#)
  - bidirectional [35](#)
  - declaring [34](#)
  - defining by listing nodes [71](#)
  - direction, declaring [35](#)
  - instance, mapping to defining module ports [183](#)
  - names, using to connect instances [184](#)
  - type of, declaring [35](#)
  - undeclared types as [35](#)
- potential
  - definition [506](#)
  - in electrical systems [27](#)
  - probes [274](#)
  - sources, definition [275](#)
  - sources, equivalent circuit model for [276](#)
  - sources, switching to flow sources [277](#)
- potential law. See Kirchhoff's Laws [27](#)
- power (pow) function [106](#)
- power consumption, specifying [170](#)
- power electronics components [429](#)
- power function model [386](#)
- power meter model [404](#)
- power sink model, constant [299](#)
- precedence of operators [88](#), [95](#)
- preparing a library [202](#)
- primitives
  - definition [506](#)
  - instantiating in Verilog-A modules [188](#)
- probe model
  - delta [398](#)
  - find event [399](#)
  - signal statistics [399](#), [401](#), [409](#)
- probes [274](#)
  - definition [274](#), [507](#)
  - flow [274](#)
  - potential [274](#)
  - reasons for using [274](#)
- procedural assignment statement [76](#)
- procedural assignment statements in the

- analog block [76](#)
- procedural control constructs [75](#)
- proportional controller model [322](#)
- proportional derivative controller [323](#)
- proportional derivative controller
  - model [323](#)
- proportional integral controller model [324](#)
- proportional integral derivative controller
  - model [325](#)
- pump model, charge [445](#)

## Q

- Q (charge) meter model [406](#)
- QAM 16-ary demodulator model [462](#)
- QPSK demodulator model [465](#)
- QPSK modulator model [462](#), [466](#)
- QPSK, definition [462](#)
- quadrature amplitude 16-ary modulator
  - model [464](#)
- quadrature phase shift key demodulator
  - model [465](#)
- quadrature phase shift key modulator
  - model [466](#)
- quantities
  - defining [214](#)
  - parameters for [215](#)
- quantity statement
  - modifying absolute tolerances with [485](#)
  - syntax [214](#)
- quantity.spectre file
  - overriding values in [215](#)
  - specifying quantities with [214](#)
- quantizer model [364](#)
- querying the simulation environment [123](#)

## R

- R [507](#)
- random bit stream generator model [467](#)
- random numbers, generating [132](#)
- \$random simulator function [132](#)
- range
  - for integer numbers [52](#)
  - for real numbers [53](#)
- rate of change, controlling with slew filter [154](#)
- reading from a file [174](#)
- real argument not supported as direction

## Cadence Verilog-A Language Reference

---

- argument [499](#)
- real constants
  - scale factors for [49](#)
  - syntax [48](#)
- real numbers [48](#), [52](#)
  - attributes for [53](#)
  - converting to integers [53](#)
  - declaring [52](#)
  - range permitted [53](#)
- reciprocal model [387](#)
- rectangular hysteresis model [358](#)
- rectifiers
  - behavioral description for [246](#)
  - example [243](#)
- reference directions [27](#)
  - associated [27](#)
  - definition [507](#)
  - illustrated [27](#)
- reference directions, choosing [264](#)
- reference nodes [27](#)
  - compatibility of [185](#)
  - definition [507](#)
  - potential of [27](#)
- related documents [19](#)
- relative paths [479](#)
- relative tolerance [272](#)
- relay
  - example [120](#)
  - model, electromagnetic [347](#)
- reltol (relative tolerance) [272](#)
- repeat loop statement [81](#)
- repeat statement [81](#)
- repeater [365](#)
- repeater model [365](#)
- `resetall compiler directive [197](#)
- resetting directives to default values [197](#)
- resistor model [310](#)
  - self-tuning [303](#)
  - untrimmed [307](#)
- restrainer model [416](#)
- restrictions on using analog operators [144](#)
- rigid branches, attribute for [279](#)
- rise times, setting default for [197](#)
- RLC Circuit [281](#)
- RLC circuit [41](#), [42](#)
- RLC circuit model [281](#)
- rms, definition [395](#)
- road model [258](#), [417](#)
- RS-Type Flip-Flop [338](#)
- RS-type flip-flop model [338](#)
- rules, for connecting instances [185](#)

- run time binding, definition [507](#)

## S

- S [507](#)
- s or S format character [168](#)
- sample-and-hold amplifier model (ideal) [426](#)
- sampler model [407](#)
- saturating integrator model [366](#)
- saveahdlvars option [240](#)
- saving Verilog-A variables [240](#)
- scalar node [70](#)
- scale factors, for real constants [49](#)
- schematic cellviews
  - instantiating in Verilog-A components [238](#)
  - opening [219](#)
  - opening in Cadence analog design environment [225](#)
  - rules for instantiating in Verilog-A modules [238](#)
- schHiCreateBlockInst SKILL function [206](#)
- Schottky Diode [439](#)
- Schottky diode model [439](#)
- scope
  - definition [507](#)
  - named block defines new [79](#)
  - of discipline identifiers [66](#)
  - rules [47](#)
- self-tuning resistor [303](#)
- self-tuning resistor model [303](#)
- semiconductor components [432](#)
- sequential block statement [79](#)
- serial register model, 8-bit [345](#)
- serial register, 8-bit [345](#)
- shdl\_strchr function [97](#)
- shdl\_strchr string function [102](#)
- shdl\_strcspn function [97](#)
- shdl\_strcspn string function [102](#)
- shdl\_strings.vams file
  - location in hierarchy [96](#)
  - used to implement string functions [96](#)
- shdl\_strrchr function [97](#)
- shdl\_strrchr string function [103](#)
- shdl\_strspn function [97](#)
- shdl\_strspn string function [103](#)
- shdl\_strstr function [97](#)
- shdl\_strstr string function [104](#)
- shifter model, level [337](#), [360](#)

- shock absorber model [257](#)
- short circuit fault [300](#)
- short circuit fault model [300](#)
- short circuiting, of expressions [95](#)
- Show Instance Table button [231](#)
- sigma-delta converter (first-order) [425](#)
- sigma-delta converter model (first order) [425](#)
- signal driver model, differential [355](#)
- signal statistics probe [409](#)
- signal statistics probe model [399](#), [401](#), [409](#)
- signal values
  - modifying with branch contribution statement [76](#)
  - obtaining and setting [126](#)
- signal values, obtaining and setting [126](#)
- signal-flow discipline [67](#)
- signal-flow systems [27](#)
  - modeling supported by Verilog-A [27](#)
  - signal-flow disciplines used to define [72](#)
- signed number [388](#)
- signed number model [388](#)
- signs, requesting in output [167](#)
- simple filename [480](#)
- simple implicit diode [281](#)
- simple implicit diode model [281](#)
- simulating a system [271](#)
- simulation
  - overview [24](#)
  - preparing for [477](#)
- Simulation Environment Options form [238](#)
- simulation environment, querying [123](#)
- simulation time, obtaining current [123](#)
- simulation view lists [238](#)
- simulator flow [28](#)
- simulator functions
  - \$dist\_chi\_square [136](#)
  - \$dist\_erlang [138](#)
  - \$dist\_exponential [135](#)
  - \$dist\_normal [134](#)
  - \$dist\_poisson [136](#)
  - \$dist\_t [137](#)
  - \$dist\_uniform [133](#)
  - \$random [132](#)
  - ac\_stim [130](#)
  - analysis [128](#)
  - bound\_step [121](#)
  - discontinuity [119](#)
  - flicker\_noise [131](#)
  - last\_crossing [122](#)
  - limiting function [121](#)
  - noise\_table [131](#)
  - white\_noise [130](#)
- sin function [107](#)
- sine function [107](#)
- single shot model [427](#)
- sinh function [107](#)
- sink model, constant power [299](#)
- sinusoidal source
  - swept, model [367](#)
  - variable frequency, model [370](#)
- sinusoidal stimulus, implementing with ac\_stim [130](#)
- sinusoidal waveforms, controlling with slew filter [155](#)
- sizes, of connected terminals and nodes [185](#)
- SKILL function [206](#)
- SKILL functions,
  - schHiCreateBlockInst [206](#)
- slew filter [154](#)
- slew rate measurement model [403](#), [408](#)
- small-signal AC sources [130](#)
- small-signal noise sources [130](#)
- smoothing piecewise constant waveforms [151](#)
- soft current clamp model [301](#)
- soft voltage clamp model [302](#)
- source model
  - audio [443](#)
  - noise [455](#)
  - swept sinusoidal [367](#)
  - three-phase [368](#)
  - variable frequency sinusoidal [370](#)
- sources [275](#)
  - controlled [276](#)
  - current-controlled current [277](#)
  - current-controlled voltage [277](#)
  - definition [274](#), [507](#)
  - flow [275](#)
  - linear conductor model [280](#)
  - linear resistor model [281](#)
  - potential [275](#)
  - reasons for using [274](#)
  - RLC circuit model [281](#)
  - simple implicit diode model [281](#)
  - unassigned [277](#)
  - voltage-controlled current [276](#)
  - voltage-controlled voltage [276](#)
- space
  - displaying or printing [167](#)

- white [46](#)
- special characters [166](#)
- special characters, displaying [166](#)
- Spectre
  - netlist file [480](#)
  - netlist file, creating [480](#)
  - primitives, instantiating in Verilog-A modules [188](#)
- Spectre/Spectreverilog Interface (Spectre Direct) [215](#)
- SpectreHDL equivalent string functions [96](#)
  - table of [97](#)
- SpectreHDL string functions, Verilog-A equivalents for [98](#)
- SpectreHDL string functions, Verilog-A replacements for [96](#)
- SpectreVerilog [201](#)
- SPICE-mode netlisting, naming requirements for [483](#)
- spring model [256](#), [418](#)
- sqr function [106](#)
- square brackets, meaning of, in syntax [21](#)
- square model [389](#)
- square root function [106](#)
- square root model [390](#)
- functions
  - \$sscanf [96](#)
- \$sscanf function [96](#)
- \$sscanf operator
  - details [100](#)
- standard constants [288](#)
- standard mathematical functions [106](#)
- string copy operator [99](#)
- string copy operator, details [99](#)
- string functions
  - \$sscanf [100](#)
  - atoi [100](#)
  - atoreal [101](#)
  - concatenation [99](#)
  - copy [99](#)
  - getc [101](#)
  - len [101](#)
  - shdl\_strchr [102](#)
  - shdl\_strcspn [102](#)
  - shdl\_strchr [103](#)
  - shdl\_strspn [103](#)
  - shdl\_strstr [104](#)
  - SpectreHDL equivalent [96](#)
  - Verilog-A [96](#)
- string parameters, declaring [59](#)
- strings
  - atoi operator [96](#)
  - atoreal function [96](#)
  - characters in specified set [97](#)
  - comparison operators [96](#)
  - comparison operators for [99](#)
  - concatenation operator [96](#)
  - converting to integer [96](#)
  - converting to real [96](#)
  - copy operators [96](#)
  - first position of subset [97](#)
  - getc function [96](#)
  - last location of character in [97](#)
  - len function [96](#)
  - location of character in [97](#)
  - number of characters in [96](#)
  - operators and functions [95](#)
  - shdl\_strchr function [97](#)
  - shdl\_strcspn [97](#)
  - shdl\_strings.vams file and string functions [96](#)
  - shdl\_strchr function [97](#)
  - shdl\_strspn [97](#)
  - shdl\_strstr function [97](#)
  - size of character set in [97](#)
  - substr function [96](#)
  - substrings off [96](#)
  - Verilog-A equivalent functions for [98](#)
- strings, as parameter values [189](#)
- \$strobe
  - description [166](#), [170](#)
  - example [168](#)
- structural definitions, definition [507](#)
- structural descriptions, undeclared port types in [35](#)
- Student's T distribution [137](#)
- Student's T distribution function [137](#)
- substr function [96](#)
- subtractor model [391](#)
  - four numbers [392](#)
  - full [343](#)
  - half [342](#)
- suggestions for updating models [496](#)
- svcv primitive [188](#)
- swept sinusoidal source
  - model [367](#)
- switch [317](#)
  - branch, creating [78](#)
  - branches [78](#), [277](#), [278](#)
  - branches, value retention for [278](#)
  - model [317](#)
- switch view list

- illustrated [238](#)
- modifying with Hierarchy Editor [239](#)
- switched capacitor integrator model [428](#)
- switching the cellview bound with an instance [221](#)
- symbol cellview
  - creating from a new Verilog-A cellview [211](#)
  - creating from a Verilog-A cellview [212](#)
- symbol cellviews, creating from Verilog-A cellviews [212](#)
- symbol editor [206](#)
- Symbol Generation form [212](#)
- symbol view, creating [204](#)
- symbols
  - copying [204](#)
  - creating [204](#), [211](#)
  - creating Verilog-A cellviews from [206](#)
- synchronizing
  - hierarchy editor with changes in the schematic [224](#)
  - schematic with changes in the hierarchy editor [223](#)
- syntax
  - checking, in Cadence analog design environment [208](#)
  - definition operator (::=) [20](#)
  - error [475](#)
  - typographical conventions for [20](#)
- systems
  - conservative [27](#)
  - definition [25](#)

## T

- tab characters
  - as white space [46](#)
  - displaying [166](#)
- table model file format [140](#)
- tan function [107](#)
- tangent function [107](#)
- tanh function [107](#)
- technology file [204](#)
- technology file for New Library form [204](#)
- telecommunications components [440](#)
- temperature, obtaining current ambient [124](#)
- terminals
  - as defined for gearbox [264](#)
  - branch [73](#)
- ternary operator [94](#)
- text editor, using to create modules [211](#)
- text macros [194](#)
  - defining [194](#)
  - restrictions on [195](#)
  - undefining [196](#)
- thermal voltage, obtaining [124](#)
- thin-film MOSFET [249](#)
- thin-film transistor (TFT) model [249](#)
- third-order polynomial function model [385](#)
- three-phase
  - motor model [348](#)
  - source model [368](#)
- thyristor model [431](#)
- thyristors
  - behavioral description for [245](#)
  - compared to diodes [244](#)
- time derivative operator [144](#)
- time integral operator [145](#)
- time step, bounding [121](#)
- time-points, placed by transition filter [151](#)
- timer event [115](#)
- timer function [115](#)
- `timescale compiler directive
  - not reset by `resetall directive [197](#)
  - syntax [197](#)
- toggle-type flip-flop model [339](#)
- tolerances
  - absolute [272](#)
  - relative [272](#)
- top-down design [205](#)
- torque [264](#)
- transformer model, two-phase [375](#)
- transformer, behavioral description for [246](#)
- transient analysis [271](#)
- transistor model
  - MOS (level 1) [433](#)
  - MOS thin-film [435](#)
  - N JFET [436](#)
  - NPN bipolar junction [437](#)
- transition filter
  - not recommended for smoothly varying waveforms [152](#)
  - syntax [151](#)
- transmission channel model [468](#)
- triangular wave source, example [119](#)
- trigger-type flip-flop model [339](#)
- trigonometric and hyperbolic functions [106](#)
- trigonometric functions [106](#)
- troubleshooting loops of rigid branches [279](#)

two-phase transformer model [375](#)  
type specifier, optional on parameter  
    declaration [56](#)  
typographic and syntax conventions [20](#)

## U

unary operators [89](#)  
    defined [89](#)  
    precedence of [89](#)  
unary reduction operators [89](#)  
unassigned sources [277](#)  
`undef compiler directive [196](#)  
undefining text macros [196](#)  
underscore, in identifiers [47](#)  
uniform distribution [133](#)  
uniform distribution function [133](#)  
unit attribute  
    description [64](#)  
    for integers [52](#), [191](#), [279](#)  
    for parameters [55](#)  
    for reals [53](#)  
    requirements for [65](#)  
units (scale factors) for real numbers [49](#)  
untrimmed  
    capacitor model [305](#)  
    inductor model [306](#)  
    resistor model [307](#)  
user-defined functions [177](#)  
    calling [179](#)  
    declaring [177](#)  
    declaring analog [177](#)  
    restrictions on [178](#)

## V

V [508](#)  
.va file extension [478](#)  
value retention for switch branches [278](#)  
value-to-flow converter model [369](#)  
variable frequency sinusoidal source  
    model [370](#)  
variable-gain amplifier model, voltage-  
    controlled [309](#)  
variable-gain differential amplifier  
    model [371](#)  
variables  
    displaying waveforms of [240](#)  
variables, choosing [264](#)

VCO model [469](#)  
VCO, definition [449](#)  
vector nodes, definition [70](#)  
vectors, arguments represented as [156](#)  
Verilog and VHDL [239](#)  
Verilog, digital  
    cannot instantiate below Verilog-A  
        module [239](#)  
    wiring to Verilog-A components [239](#)  
Verilog-A  
    definition [508](#)  
    language overview [24](#)  
    .va extension for files [478](#)  
Verilog-A cellviews  
    creating [210](#)  
    creating from a symbol or block [206](#)  
    creating from existing Verilog-A  
        cellviews [217](#)  
    creating from scratch [210](#)  
    creating from symbols or blocks [206](#)  
    editing outside of the analog design  
        environment [208](#)  
veriloga cellviews, creating with VerilogA-  
    Editor [210](#)  
Verilog-A module description, creating [478](#)  
Verilog-A string functions, table of [96](#)  
vertical bars, meaning of, in syntax [20](#)  
VHDL  
    cannot instantiate below Verilog-A  
        module. [239](#)  
    wiring to Verilog-A components [239](#)  
voltage clamp model  
    hard [296](#)  
    soft [302](#)  
voltage deadband amplifier [38](#)  
    model [308](#)  
voltage meter model [411](#)  
voltage source model  
    current-controlled [314](#)  
    voltage-controlled [313](#)  
voltage-controlled current source [276](#)  
voltage-controlled current source  
    model [315](#)  
voltage-controlled oscillator  
    model [469](#)  
    model, digital [450](#)  
voltage-controlled variable-gain amplifier  
    model [309](#)  
voltage-controlled voltage source [276](#)  
voltage-controlled voltage source  
    model [313](#)



### W

- waveforms, displaying [240](#)
- wheel [419](#)
- wheel model [260](#), [419](#)
- while loop statement [82](#)
- while statement [82](#)
- white space [46](#)
- white\_noise function [130](#)
- white\_noise simulator function [130](#)
- winding model, magnetic [374](#)
- wire (predefined empty discipline) [67](#)
- writing to a file [174](#)

### X

- XNOR Gate [332](#)
- XNOR gate model [332](#)
- XOR Gate [331](#)
- XOR gate model [331](#)

### Z

- Z (impedance) meter [412](#)
- Z (impedance) meter model [412](#)
- zero crosses, detecting [112](#)
- zero-denominator Laplace transforms [157](#)
- zero-denominator Z-transforms [163](#)
- zero-pole Laplace transforms [157](#)
- zero-pole Z-transforms [162](#)
- zi\_nd Z-transform filter [164](#)
- zi\_np Z-transform filter [163](#)
- zi\_zd Z-transform filter [163](#)
- zi\_zp Z-transform filter [162](#)
- Z-transform filters [161](#)
- Z-transforms
  - introduction [161](#)
  - numerator-denominator form [164](#)
  - numerator-pole form [163](#)
  - zero-denominator form [163](#)
  - zero-pole form [162](#)

